

Preliminary "High Frequency Ceramic Solutions"

2 GHz Antenna Small form factor
Detail Specification: 03/04/09

P/N 2000AT18A0075
Page 1 of 3

General Specifications

Part Number	2000AT18A0075
Frequency Range	1965 - 2040 Mhz
Peak Gain	0.3 dBi typ. (XZ-V)
Average Gain	-3 dBi typ. (XZ-V)
Return Loss	9.5 dB min.

Input Power	2 Watts max.
VSWR	2 max
Operating Temperature	-40 to +85°C
Reel Quantity	3000

No.	Function	Terminal Configuration
1	Feeding Point	
2	NC	


Mechanical Dimensions

	In	mm
L	0.126 ± 0.008	3.20 ± 0.20
W	0.063 ± 0.008	1.60 ± 0.20
T	0.051 ± 0.008	1.30 ± 0.20
a	0.020 ± 0.012	0.50 ± 0.30

Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

*Line width should be designed to provide 50Ω impedance matching characteristics.

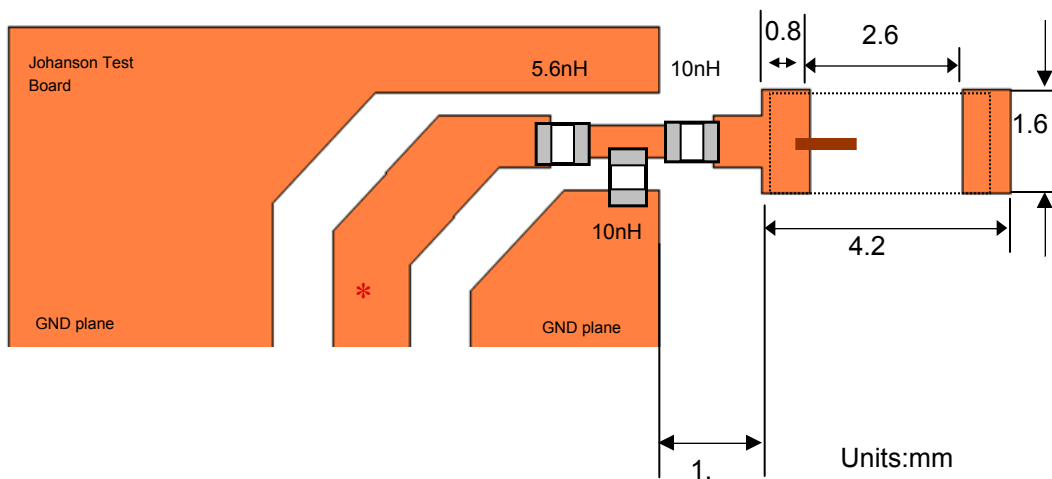

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

Preliminary "High Frequency Ceramic Solutions"


2 GHz Antenna

P/N 2000AT18A0075

Detail Specification: 03/04/09

Page 2 of 3

Typical Electrical Characteristics (T=25°C)

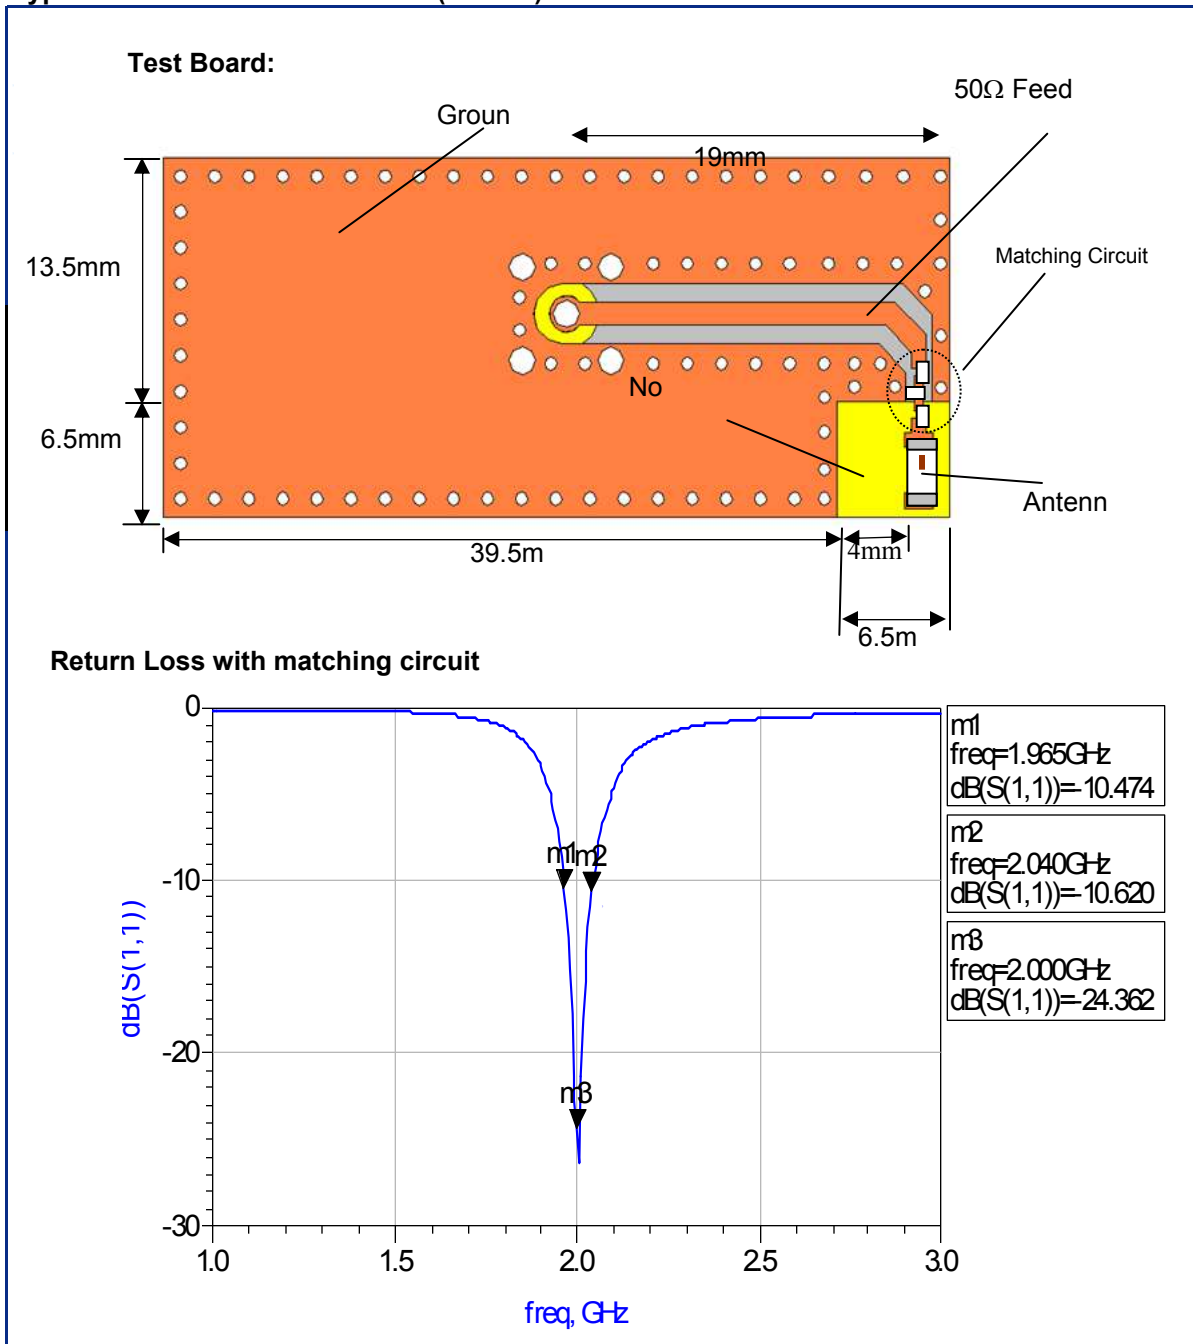

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.


Preliminary "High Frequency Ceramic Solutions"

2 GHz Antenna

Detail Specification: 03/04/09

P/N 2000AT18A0075

Page 2 of 3

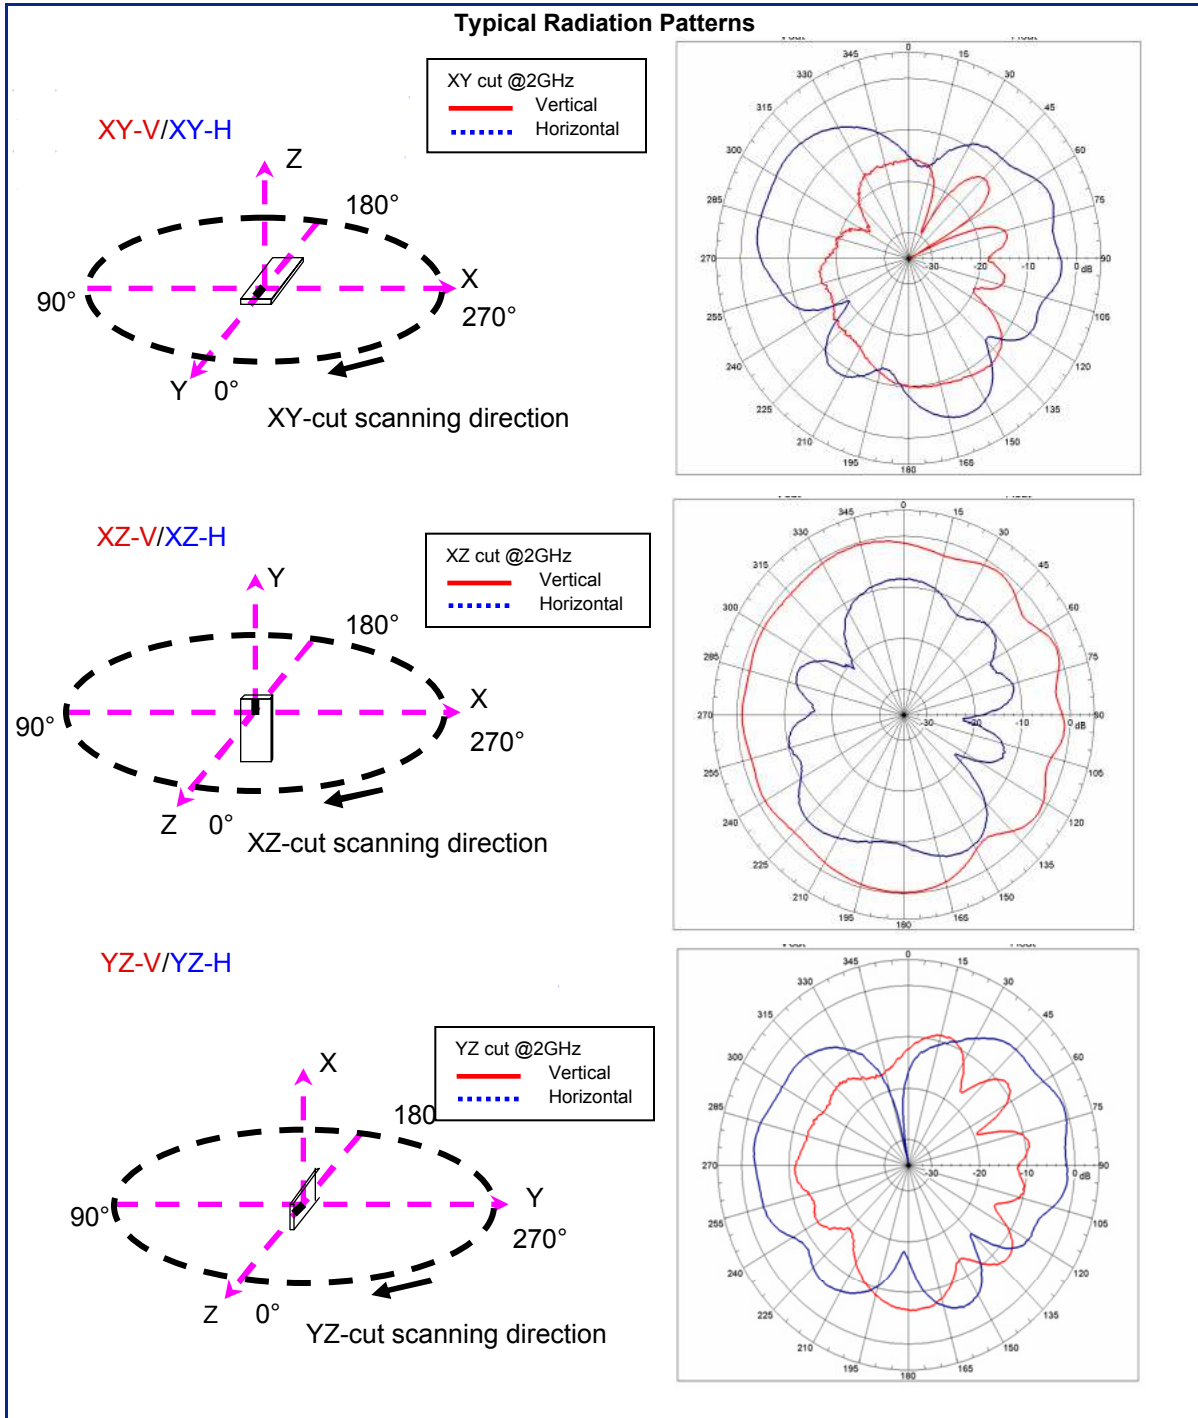

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.