SURFACE MOUNT MICROPROCESSOR CRYSTAL


Page 1 of 3

RSE-32.768-7-H14-TR-NS6


SPECIFICATIONS

PARAMETER	VALUE		
NOMINAL FREQUENCY	32.768 kHz		
FREQUENCY TOLERANCE AT 25°C	±20 ppm max		
TEMPERATURE COEFFICIENT	-0.033 ± 10% ppm/°C ²		
TURNOVER TEMPERATURE	25°C ±5°C		
OPERATING TEMPERATURE RANGE	-40°C to +85°C		
STORAGE TEMPERATURE RANGE	-55°C to +125°C		
AGING	±3 ppm per year max		
LOAD CAPACITANCE	7 pF		
EQUIVALENT SERIES RESISTANCE	65 kΩ max		
SHUNT CAPACITANCE	0.9 pF typ		
DRIVE LEVEL	0.1 μW typ, 1 μW max		

MECHANICAL SPECIFICATION

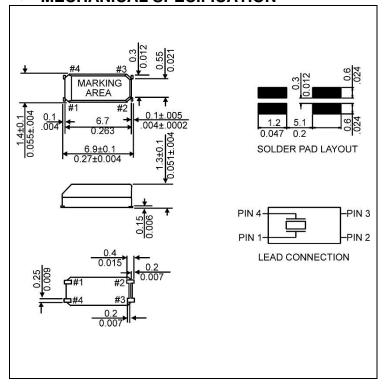

CARRIER TAPE DIMENSIONS

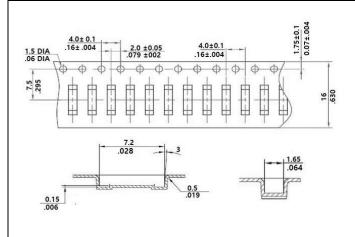

NOTE: REFER TO EIA-481 FOR DIMENSIONS

PACKAGING


330 mm REEL DIAMETER 16 mm TAPE WIDTH, 4 mm PITCH QUANTITY: 3000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481



RSE-32.768-7-H14-TR-NS6

REFLOW PROFILE

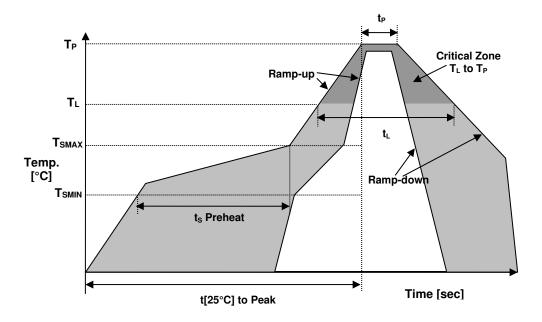

Reflow profile				
Temperature Min Preheat	T _{SMIN}	125°C		
Temperature Max Preheat	T _{SMAX}	150°C		
Time (T _{SMIN} to T _{SMAX})	ts	60-180 sec.		
Temperature	TL	217°C		
Peak Temperature	T_P	260°C		
Ramp-up rate	R _{UP}	3°C/sec max.		
Ramp-down rate	R _{DOWN}	6°C/sec max.		
Time within 5°C of Peak Temperature	t _P	10 sec.		
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.		
Time	t _L	60-150 sec.		

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH SVHC	Compliant
HALOGEN-FREE	Compliant
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Sn





SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 3 of 3

RSE-32.768-7-H14-TR-NS6

MARKING

x3FmyR

x – Internal Production ID code

y – Year code

w - Week code

YEAR CODE		
Year	Code	
2019	9	
2020	0	
2021	1	
2022	2	
2023	3	
2024	4	
2025	5	
2026	6	
2027	7	
2029	8	
2029	9	

	ALPHA WEEK CODE TABLE				
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	О
6	f	24	x	42	P
7	g	25	у	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	В	46	T
11	k	29	C	47	U
12	1	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	Н	52	Z
17	q	35	I		
18	r	36	J		

APPROVAL

DRAWN BY	XLiu, June 13, 2019
APPROVED BY	Jlvens, June 13, 2019
	A, Initial Release
REVISION	B, Updated to current spec levels by AR, August 25, 2022

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.