


## PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION									
REV	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE, RFS. 23708, EM	11/05/12	HM						



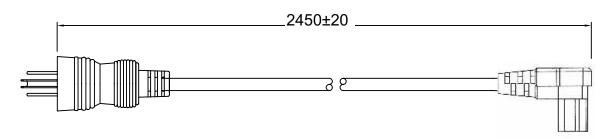



## **GENERAL SPECIFICATIONS:**

RATING: 10A /125V AC CABLE TYPE / SIZE: SJT, 18 AWG X 3

TEMPERATURE RATING: 60° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK

OVERALL LENGTH:  $2450 \pm 20 \text{ mm}$ CABLE OUTER DIAMETER:  $7.8 \pm 0.2 \text{ mm}$ 

END 'A' TERMINATION: HOSPITAL GRADE NEMA 5-15P, BLACK END 'B' TERMINATION: IEC 320/C13 RIGHT (DOWN) ANGLE, BLACK

APPROVALS PLUG: UL, CSA or cUL
APPROVALS CABLE: UL, CSA or cUL
APPROVALS CONNECTOR: UL, CSA or cUL

## **PACKING:**

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

## **NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





OR



2. HOSPITAL GRADE NEMA 5-15P PLUG IS BLACK COLORED WITH GREEN DOT.

			DASH NO.	PART NO	REV.	V. DESCRIPTION		NOTES
			TABULATION BLOCK					
					TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Nor Tel. 201-784-1000	
Contents of this document	safety and performance of these power product if unauthorized access and repair t occurs. End user should consult the applica-	mission critical components in life support, haz- ardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY: FS	DATE: 03/22/04	.xx +/- 0.3	MILLIMETERS ANGULAR L.		ETACHABLE
			DRAWN: NF	DATE: 03/22/04	FSCN No. G, CC	SIZE A	MODEL: N/A	REV. A
			APRVD: DMR	DATE: 03/22/04	SCALE:	NONE	PART NO: 1191068F07012(R)	SHEET 1/1