




Cypress Microcontroller

PRODUCT SELECTOR GUIDE



Consumer and Industrial MCU Core Roadmap

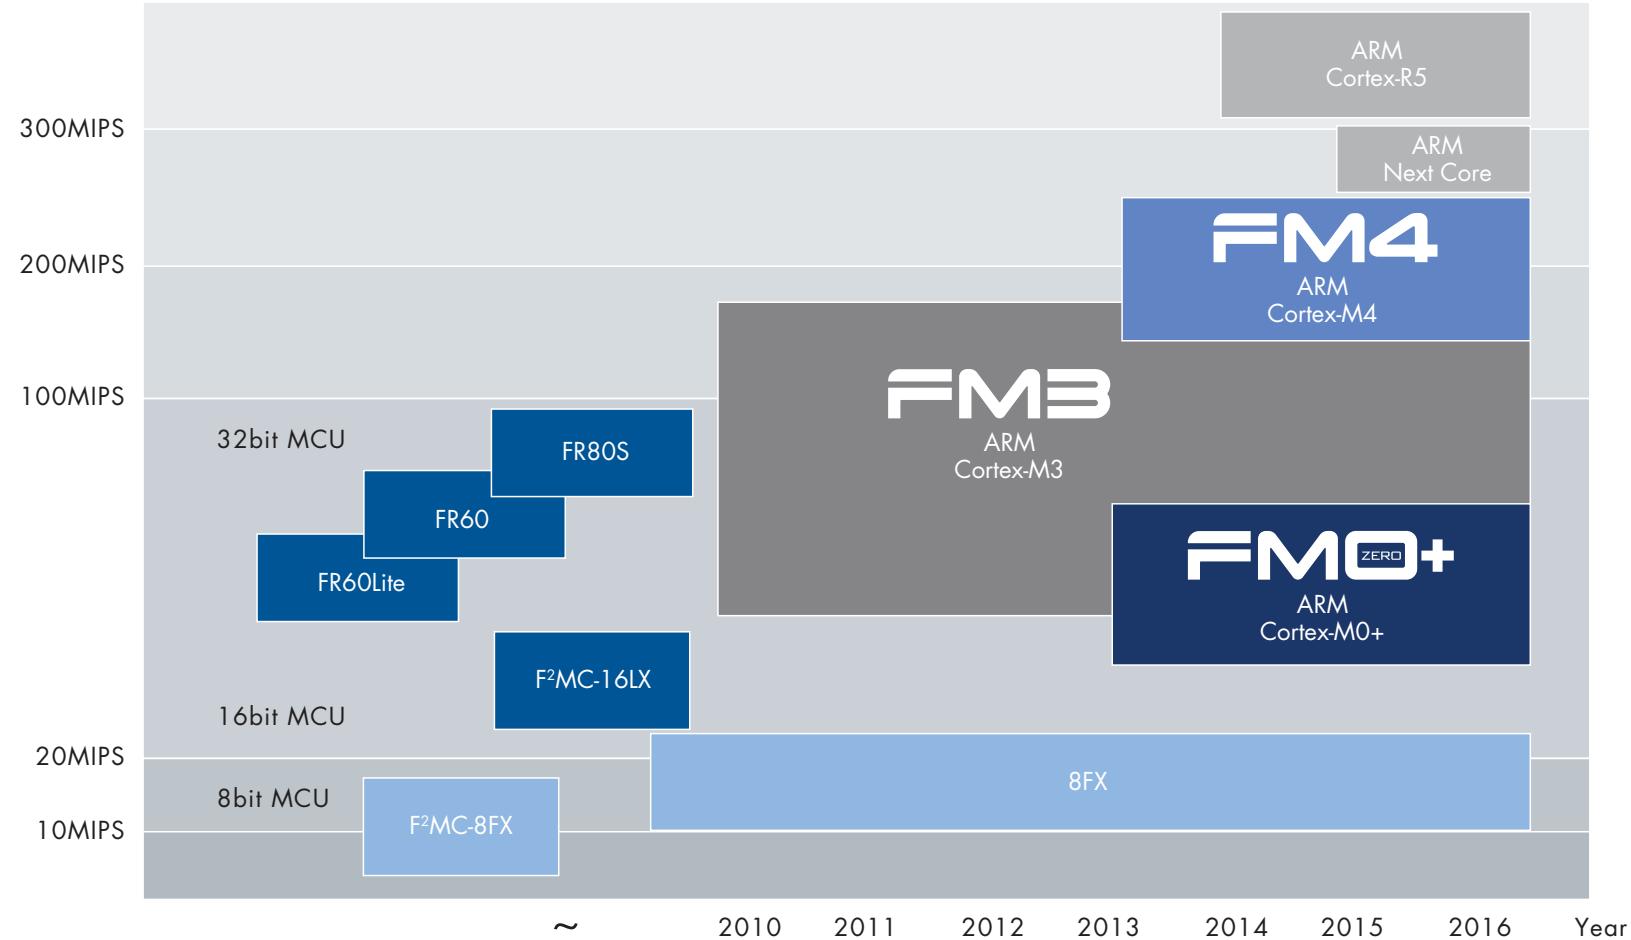

Consumer and Industrial MCU Family



FM4 FAMILY

Cypress ARM® Cortex®-M4F microcontroller family is a high range line providing maximum CPU frequency of 200MHz, a high speed flash memory with DSP and FPU hardware instructions. Customers can select the best fitting device from a range of products, coming in packages from 48 pin to 216 pin and flash memory densities between 256KB and 2MB. The wide operation supply voltage range up to 5.5V which improves the signal to noise ratio, results in a robust design and is unique among Cortex-M4F microcontroller families. The MCUs are designed for applications that require advanced, high-speed computing performance such as general-purpose inverters, servomotors, PLCs and other industrial equipment, as well as inverter-based home appliances such as washing machines and air conditioners.



FM3 FAMILY

Cypress ARM Cortex-M3 microcontroller family is a scalable platform for many industrial applications. Customers can select the best fitting device from a range of products, coming in packages from 32 pin to 176 pin and flash memory densities between 32KB and 1MB. With a maximum CPU frequency of 144MHz and high speed flash memory, FM3 supports the fastest ARM Cortex-M3 devices on the market. The wide operation supply voltage range up to 5.5V, which improves the signal to noise ratio, results in a robust design and is quite unique among Cortex-M3 microcontroller families. The FM3 MCU family is split into four groups: high performance, basic, low power and ultra low leakage groups. The main differences between the groups are CPU operation frequency and supply voltage. All products are based on the same architecture (software compatible), use the same peripherals and are pin compatible in most cases. The ultra low leakage line products are based on an optimized low leakage process technology. Development tools and evaluation boards are offered from different vendors and Cypress.




FMO+ FAMILY

The Cypress FMO+ family, which is based on the ARM Cortex-M0+ core, is designed for low power and cost-sensitive applications such as white goods, sensors, meters, HMI systems, power tools and Internet of Things (IoT) battery powered or energy harvesting wearable devices. These microcontrollers can be easily embedded into systems adopting 8-, 16- or 32-bit MCUs, accelerating product development and reducing development costs. The FMO+ family includes two groups for ultra-low-power and cost-effective applications. The devices in the ultra-low-power group have an operating voltage range of 1.65V to 3.6V, and a maximum CPU clock frequency of 40MHz, a RUN mode current of 70 µA/MHz, an RTC mode current of 0.7 µA and wake-up time of approximately 40 µs.

8FX FAMILY

Cypress 8FX MCU family is a high-performance 8-bit microcontroller utilizing a different embedded flash memory size. This series uses the F2MC-8FX CISC CPU, which offers industry leading class performance of an 8-bit microcontroller unit enabling more instructions to be executed per cycle. On top of delivering industry class performance MCUs, the 8FX family also delivers low power efficient MCU products for the customer's usage. This series also features a variety of on-chip timers, A/D converters, analog and digital peripheral and communication interfaces such as LIN-UART (Local Interconnect Network Universal Asynchronous Receiver-Transmitter), CAN (controller area network) and I2C (Inter-Integrated Circuit) interface for various application usages. For easy development, the 8FX family also employs a 1-line on-chip debug that uses only one pin on the microcontroller, thereby minimizing the number of pins used for debugging in product development. Cypress also provides easy to use and cost competitive development starter kits and development environments for this MCU series.

Automotive MCU Core Roadmap

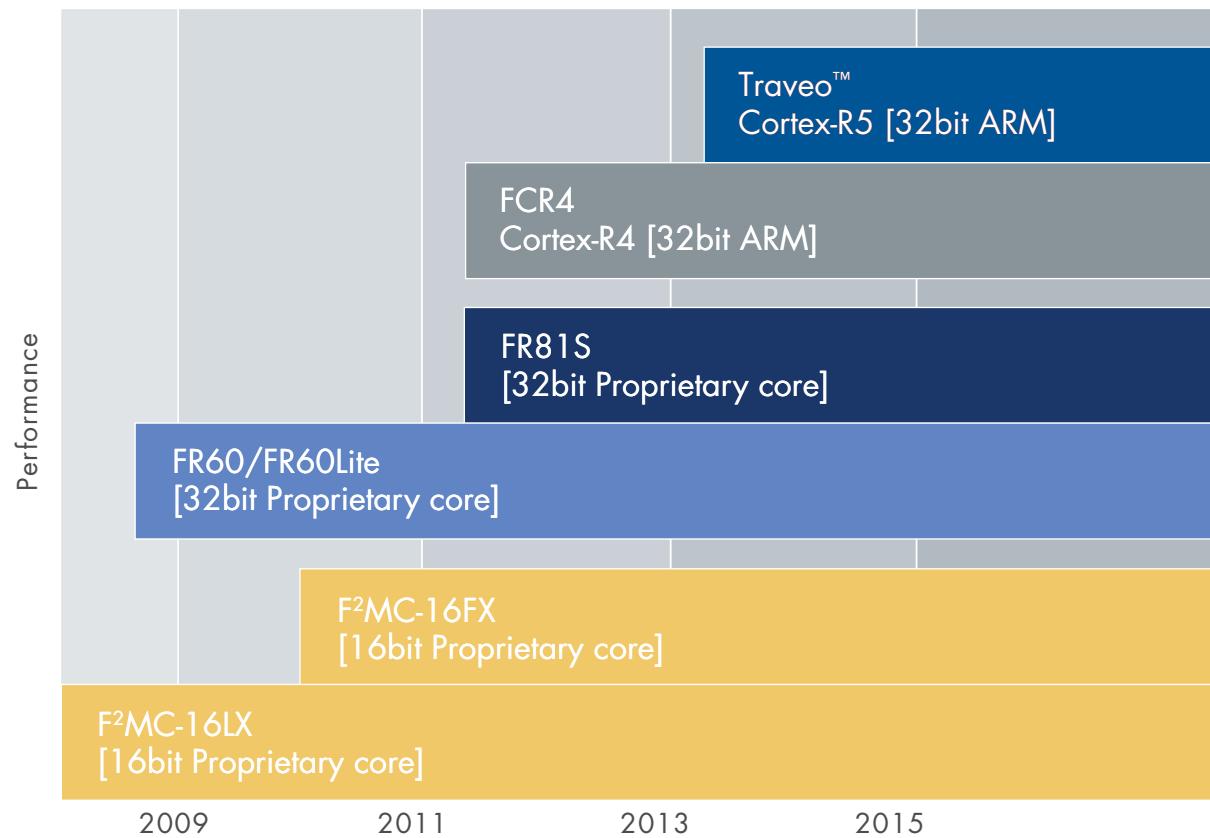

Automotive MCU Family

TRAVEO FAMILY

The Cypress Traveo™ family expands the company's automotive application coverage, scalability and high performance into one line-up and at the same time adds new features to fulfill the latest requirements of the automotive industry. Based on the powerful ARM® Cortex®-R5 and R5F core in single and dual core operations, it offers state-of-the-art real-time performance, safety and security features.

The family supports the latest in-car networks and offers high performance graphics engines optimized for a minimum memory footprint and embeds dedicated features to increase data security in the car.

High-level Traveo Features

- ARM Cortex-R5 core
- Dual core
- Embedded twin-motor control with internal R/D converter
- Embedded 2D and 3D graphics engines
- High performance embedded flash memory
- Cypress HyperBus™: High speed serial interfaces to connect external memory
- Qualified for automotive use (AEC-Q100)
- Software support for Autosar, graphics drivers and more

FR FAMILY

Cypress 32bit MCU families have been designed in close co-operation with major automotive customers worldwide and inherit the high-performance core of Cypress's proprietary FR MCU architecture. They support communication interfaces such as CAN, FlexRay and LIN as well as up to 2MB on-chip memory capacity. The latest members (MB915xx) also include a single precision Floating Point Unit (FPU) providing additional computing power required by complex control algorithms.

This high computing performance combined with powerful peripheral functions such as on-chip graphics controller and motor control macros, offers a higher grade of flexibility and lower cost for automotive as well as industrial applications.

Many devices offer an external bus interface which can be connected to Cypress's stand alone FlexRay controller or to the latest generation of graphics controllers in order to build full-featured dashboards, driver information systems or advanced body systems.

FCR4 FAMILY

The FCR4 family has been specifically designed to offer an innovative, scalable solution for hybrid instrument clusters, which combine traditional meters and graphical displays. The devices offer a powerful architecture based on the ARM Cortex-R4 core and Cypress's 2D graphics engine.

High-level FCR4 Features

- ARM Cortex-R4 core
- Embedded 2D graphics engine
- 2MB flash, 64KB E2Flash
- Up to 208KB RAM
- Features including real-time clock/auto calibration, sound generator and I2S

F2MC-16FX FAMILY

Cypress 16-bit flexible microcontroller series offers a scalable family concept approach to a variety of automotive and industrial applications. The scalable flash/ROM/RAM sizes with different mixtures of peripherals saves development time and costs. CAN and LIN support, on-chip LCD controller, SMC (stepper motor controller), I²C bus interface, analog input channels, external bus interface, selectable port levels for CMOS, TTL and Automotive Levels are some of the enhanced features. A security feature is incorporated, preventing unauthorized reading of the contents of the flash memory.



FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbytes]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	Communication	LDI Controller [seg 0/om]	Three-phase inverter	Note	Evaluation Device
S6E2HG	S6E2HG6E0A	160	LQFP-80										63	16 (3)																							
	S6E2HG6F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	80																				Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ETM)			
	S6E2HG6G0A		LQFP-120	BGA-121									100																								
	S6E2HG4E0A	160	LQFP-80										63	16 (3)																							
	S6E2HG4F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	80																								
	S6E2HG4G0A		LQFP-120	BGA-121									100																								
S6E2HE	S6E2HE6E0A	160	LQFP-80										63	16 (3)																							
	S6E2HE6F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	80																								
	S6E2HE6G0A		LQFP-120	BGA-121									100																								
	S6E2HE4E0A	160	LQFP-80										63	16 (3)																							
	S6E2HE4F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	80																								
	S6E2HE4G0A		LQFP-120	BGA-121									100																								
S6E2H4	S6E2H46E0A	160	LQFP-80										63	16 (3)																							
	S6E2H46F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	80																								
	S6E2H46G0A		LQFP-120	BGA-121									100																								
	S6E2H44E0A	160	LQFP-80										63	16 (3)																							
	S6E2H44F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	80																								
	S6E2H44G0A		LQFP-120	BGA-121									100																								
S6E2H1	S6E2H16E0A	160	LQFP-80										63	16 (3)																							
	S6E2H16F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	80																								
	S6E2H16G0A		LQFP-120	BGA-121									100																								
	S6E2H14E0A	160	LQFP-80										63	16 (3)																							
	S6E2H14F0A		LQFP-100	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	80																								
	S6E2H14G0A		LQFP-120	BGA-121									100																								
S6E2GM w/Security	S6E2GM8HHA	180	LQFP-144										121	24 (3)																							
	S6E2GM8JHA		LQFP-176	2.7 to 5.5	✓	Main Flash	1024K	192K		8	32	✓	153																								
	S6E2GM6HHA		LQFP-144										121	24 (3)																							
	S6E2GM6JHA		LQFP-176										153	32 (3)																							
S6E2GM	S6E2GM8H0A	180	LQFP-144										121	24 (3)																							
	S6E2GM8J0A		LQFP-176	2.7 to 5.5	✓	Main Flash	1024K	192K		8	32	✓	153																								
	S6E2GM6H0A		LQFP-144										121	24 (3)																							
	S6E2GM6J0A		LQFP-176										153	32 (3)																							
S6E2GK w/Security	S6E2GK8HHA	180	LQFP-144										121	24 (3)																							
	S6E2GK8JHA		LQFP-176	2.7 to 5.5	✓	Main Flash	1024K	192K		8	32	✓	153																								
	S6E2GK6HHA		LQFP-144										121	24 (3)																							
	S6E2GK6JHA		LQFP-176										153	32 (3)																							
S6E2GK	S6E2GK8H0A	180	LQFP-144										121	24 (3)																							
	S6E2GK8J0A		LQFP-176	2.7 to 5.5	✓	Main Flash	1024K	192K		8	32	✓	153																								
	S6E2GK6H0A		LQFP-144										121	24 (3)																							
	S6E2GK6J0A		LQFP-176										153	32 (3)																							

* In development; **Planning

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DAConverter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Timer	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	Communication	LD Controller [seg x com]	Three-phase inverter	Note	Evaluation Device
S6E2GH	S6E2GH8H0A	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121 153 121 153	-	24 (3) 32 (3) 24 (3) 32 (3)	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	Multi Function Serial x 10ch (UART/CSIO/I²C/LIN Selectable)	1	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTCx256ch, Tiny I2S, Smart Card I/F, SDC	On-Chip Debug (SWJ-DP/ ETM)													
	S6E2GH8J0A		LQFP-176																																			
	S6E2GH6H0A		LQFP-144																																			
	S6E2GH6J0A		LQFP-176																																			
S6E2G3	S6E2G38H0A	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121 153 121 153	-	24 (3) 32 (3) 24 (3) 32 (3)	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	Multi Function Serial x 10ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTCx256ch, Tiny I2S, Smart Card I/F	On-Chip Debug (SWJ-DP/ ETM)													
	S6E2G38J0A		LQFP-176																																			
	S6E2G36H0A		LQFP-144																																			
	S6E2G36J0A		LQFP-176																																			
S6E2G2 w/security	S6E2G28HHA	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121 153 121 153	-	24 (3) 32 (3) 24 (3) 32 (3)	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	Multi Function Serial x 10ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTCx256ch, Tiny I2S, Smart Card I/F, ETH, Chipher	On-Chip Debug (SWJ-DP/ ETM)													
	S6E2G28JHA		LQFP-176																																			
	S6E2G26HHA		LQFP-144																																			
	S6E2G26JHA		LQFP-176																																			
S6E2G2	S6E2G28H0A	180	LQFP-144	2.7 to 5.5	✓	Main Flash	1024K	192K	-	8	32	✓	121 153 121 153	-	24 (3) 32 (3) 24 (3) 32 (3)	Multi-Function Timer x2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 6ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	Multi Function Serial x 10ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTCx256ch, Tiny I2S, Smart Card I/F, ETH, Chipher	On-Chip Debug (SWJ-DP/ ETM)													
	S6E2G28J0A		LQFP-176																																			
	S6E2G26H0A		LQFP-144																																			
	S6E2G26J0A		LQFP-176																																			
S6E2DH	S6E2DH5G0A	160	LQFP-120 TQFP-120 BGA-161	2.7-3.6	✓	Main Flash	384K	36K	-	8	16	✓	98 90 154	-	24 (3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/Input Capture 4ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG6ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	QPRC x 1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x128ch, CAN-FD 1ch, SDC I2S 2ch, High Speed Quad SPI x1, Hyper Bus x1, GDC	On-Chip Debug (SWJ-DP/ETM)													
	S6E2DH5GJA		LQFP-120 (SIP)																																			
	S6E2DH5J0A		LQFP-176																																			
S6E2DF	S6E2DF5G0A	160	LQFP-120 TQFP-120 BGA-161	2.7-3.6	✓	Main Flash	384K	36K	-	8	16	✓	98 90 154	-	24 (3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/Input Capture 4ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG6ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	QPRC x 1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x128ch, CAN-FD 1ch, I2S 2ch, High Speed Quad SPI x1, Hyper Bus x1, GDC	On-Chip Debug (SWJ-DP/ETM)													
	S6E2DF5GJA		LQFP-120 (SIP)																																			
	S6E2DF5J0A		LQFP-176																																			
S6E2D5	S6E2D55G0A	160	LQFP-120 TQFP-120 BGA-161	2.7-3.6	✓	Main Flash	384K	36K	-	8	16	✓	98 90 154	-	24 (3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/Input Capture 4ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG6ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	QPRC x 1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x128ch, SDC I2S 2ch, High Speed Quad SPI x1, Hyper Bus x1, GDC	On-Chip Debug (SWJ-DP/ETM)													
	S6E2D55GJA		LQFP-120 (SIP)																																			
	S6E2D55J0A		LQFP-176																																			
S6E2D3	S6E2D35G0A	160	LQFP-120 TQFP-120 BGA-161	2.7-3.6	✓	Main Flash	384K	36K	-	8	16	✓	98 90 154	-	24 (3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/Input Capture 4ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG6ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	QPRC x 1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x128ch, I2S 2ch, High Speed Quad SPI x1, Hyper Bus x1, GDC	On-Chip Debug (SWJ-DP/ETM)													
	S6E2D35GJA		LQFP-120 (SIP)																																			
	S6E2D35J0A		LQFP-176																																			

FM4 Family – 32bit Microcontrollers

FM4 Family – 32bit Microcontrollers

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	DAConverter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Timer	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	Communication	I²S Controller [seg 0/om]	Three-phase inverter	Note	Evaluation Device
S6E2C1-E	S6E2C10H2A	200	LQFP-144	2.7 to 5.5	✓	-	0M	256K	-	8	32	✓	120	-	24 (3)	12 x 2	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 4	1	Multi Function Serial x 16ch (UART/CSIO/I²C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC, I²S 1ch(without 144pin), HDMI-CEC 2ch, High Speed Quad SPI x1(without 144pin), Programmable CRC, Cipher	On-Chip Debug (SWJ-DP/ETM/ HTM)									
	S6E2C10J2A		LQFP-176 BGA-192																																		
	S6E2C10L2A		LQFP-216																																		
MB9B560R	MB9BF566M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	16	✓	63	-	16(3)	24(3)	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)										
	MB9BF566N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF566R		LQFP-120 BGA-144																																		
	MB9BF567M		LQFP-80																																		
	MB9BF567N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF567R		LQFP-120 BGA-144																																		
	MB9BF568M		LQFP-80																																		
	MB9BF568N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF568R		LQFP-120 BGA-144																																		
MB9B460R	MB9BF466M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	16	✓	63	-	16(3)	24(3)	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)										
	MB9BF466N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF466R		LQFP-120 BGA-144																																		
	MB9BF467M		LQFP-80																																		
	MB9BF467N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF467R		LQFP-120 BGA-144																																		
MB9B360R	MB9BF468M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	768K +32K	96K	-	8	16	✓	63	-	16(3)	24(3)	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)										
	MB9BF468N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF468R		LQFP-120 BGA-144																																		
	MB9BF366M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	1024K +32K	128K	-	8	16	✓	63	-	16(3)	24(3)	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)										
	MB9BF366N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF366R		LQFP-120 BGA-144																																		
	MB9BF367M		LQFP-80																																		
	MB9BF367N		LQFP-120 BGA-144																																		
	MB9BF368M		LQFP-80																																		
	MB9BF368N		LQFP-100 QFP-100 BGA-112																																		
	MB9BF368R		LQFP-120 BGA-144																																		

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DAConverter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg.com]	Three-phase inverter	Note	Evaluation Device
MB9B160R	MB9BF166M	160	LQFP-80	2.7 to 5.5	✓	Main Flash + Work Flash	512K +32K	64K					63	16(3)	24(3)	12 x 2	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	-	-	-	-	Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)								
	MB9BF166N		LQFP-100																																	
	MB9BF166R		QFP-100																																	
	MB9BF167M		BGA-112																																	
	MB9BF167N		LQFP-120																																	
	MB9BF167R		BGA-144																																	
	MB9BF168M		LOFP-80																																	
	MB9BF168N		QFP-100																																	
	MB9BF168R		BGA-112																																	
	MB9BF168R		LQFP-120																																	
MB9B560L	MB9BF564K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash + Work Flash	256K +32K	32K					15	33	8(2)	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I²C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	-	-	-	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)							
	MB9BF564L		LQFP-64 QFN-64																																	
	MB9BF565K		LQFP-48 QFN-48																																	
	MB9BF565L		LQFP-64 QFN-64																																	
	MB9BF566K		LQFP-48 QFN-48																																	
	MB9BF566L		LQFP-64 QFN-64																																	

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC[V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [chn/unit]	12bit AD Converter [chn/unit]	DAConverter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg 7 com]	Three-phase inverter	Note	Evaluation Device
MB9B460L	MB9BF464K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	8	-	15	16	33	48	8(2)	15(2)	8(2)	12 x 2	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSI0/I2C/LIN Selectable)	1	–	–	–	–	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)							
	MB9BF464L		LQFP-64 QFN-64																																	
	MB9BF465K		LQFP-48 QFN-48																																	
	MB9BF465L		LQFP-64 QFN-64																																	
	MB9BF466K		LQFP-48 QFN-48																																	
	MB9BF466L		LQFP-64 QFN-64																																	

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC[V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DAConverter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg 7 com]	Three-phase inverter	Note	Evaluation Device
MB9B360L	MB9BF364K	160	LQFP-48 QFN-48	2.7 to 5.5 2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	8	-	15	16	33	48	8(2)	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)							
	MB9BF364L		LQFP-64 QFN-64																																	
	MB9BF365K		LQFP-48 QFN-48																																	
	MB9BF365L		LQFP-64 QFN-64																																	
	MB9BF366K		LQFP-48 QFN-48																																	
	MB9BF366L		LQFP-64 QFN-64																																	

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [bytes]	RAM [bytes]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [chn/unit]	12bit AD Converter [chn/unit]	DAConverter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x col]	Three-phase inverter	Note	Evaluation Device
MB9B160L	MB9BF164K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	8	-	15	16	33	48	8(2)	15(2)	8(2)	12 x 2	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSI0/I2C/LIN Selectable)	-	-	-	-	-	Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)							
	MB9BF164L		LQFP-64 QFN-64																																	
	MB9BF165K		LQFP-48 QFN-48																																	
	MB9BF165L		LQFP-64 QFN-64																																	
	MB9BF166K		LQFP-48 QFN-48																																	
	MB9BF166L		LQFP-64 QFN-64																																	

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC(V)	Sub-Clock	Memory Type	ROM[b/y/e]	RAM[b/y/e]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg. com]	Three-phase Inverter	Note	Evaluation Device
HIGH-PERFORMANCE GROUP																																				
MB9BD10T	MB9BFD16T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	2ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Ethernet-MAC x 2ch	On-chip Debug (SWJ-DP/ETM)											
	MB9BFD16S		LQFP-144										122	24(3)																						
	MB9BFD17T		LQFP-176 BGA-192										154	32(3)																						
	MB9BFD17S		LQFP-144										122	24(3)																						
	MB9BFD18T		LQFP-176 BGA-192										154	32(3)																						
	MB9BFD18S		LQFP-144										122	24(3)																						
MB9B610T	MB9BF616T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Ethernet-MAC x 2ch	On-chip Debug (SWJ-DP/ETM)											
	MB9BF616S		LQFP-144										122	24(3)																						
	MB9BF617T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF617S		LQFP-144										122	24(3)																						
	MB9BF618T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF618S		LQFP-144										122	24(3)																						
MB9B510T	MB9BF516T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Ethernet-MAC x 2ch	On-chip Debug (SWJ-DP/ETM)											
	MB9BF516S		LQFP-144										122	24(3)																						
	MB9BF517T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF517S		LQFP-144										122	24(3)																						
	MB9BF518T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF518S		LQFP-144										122	24(3)																						
MB9B410T	MB9BF416T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	2	2ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer	On-chip Debug (SWJ-DP/ETM)											
	MB9BF416S		LQFP-144										122	24(3)																						
	MB9BF417T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF417S		LQFP-144										122	24(3)																						
	MB9BF418T		LQFP-176 BGA-192										154	32(3)																						
MB9B310T	MB9BF316T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)											
	MB9BF316S		LQFP-144										122	24(3)																						
	MB9BF317T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF317S		LQFP-144										122	24(3)																						
	MB9BF318T		LQFP-176 BGA-192										154	32(3)																						
	MB9BF318S		LQFP-144										122	24(3)																						
MB9B210T	MB9BF216T	144	LQFP-176 BGA-192	2.7 to 5.5	✓	FLASH	512K	64K	-	8	32	✓	154	32(3)	Multi-Function Timer x 3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I²C/LIN Selectable)	-	2ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Ethernet-MAC x 1ch	On-chip Debug (SWJ-DP/ETM)											
	MB9BF216S		LQFP-144										122	24(3)																						
	MB9BF217T		LQFP-176 BGA-																																	

FM3 Family – 32bit Microcontrollers

FM3 Family – 32bit Microcontrollers

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VDD [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAc [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit ADC Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Timer	PWM Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
BASIC GROUP																																			
MB9B320M	MB9BF321K	72	LQFP-48 QFN-48 LQFP-64 QFN-64 LQFP-80 BGA-96 LQFP-48 QFN-48 LQFP-64 QFN-64 LQFP-80 BGA-96 LQFP-48 QFN-48 LQFP-64 QFN-64 LQFP-80 BGA-96	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K 128K +32K 256K +32K	16K	8	14 19 23 14 19 23 14 19 23	35 50 65 35 50 65 35 50 65	14(2) 23(2) 26(2) 14(2) 23(2) 26(2) 14(2) 23(2) 26(2)	10bit x 2	Multi-Function Timer x 1 unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	1	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)											
	MB9BF321L																																		
	MB9BF321M																																		
	MB9BF322K																																		
	MB9BF322L																																		
	MB9BF322M																																		
	MB9BF324K																																		
	MB9BF324L																																		
	MB9BF324M																																		
MB9B120M	MB9BF121K	72	LQFP-48 QFN-48 LQFP-64 QFN-64 LQFP-80 BGA-96 LQFP-48 QFN-48 LQFP-64 QFN-64 LQFP-80 BGA-96 LQFP-48 QFN-48 LQFP-64 QFN-64 LQFP-80 BGA-96	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K 128K +32K 256K +32K	16K	8	14 19 23 14 19 23 14 19 23	35 50 65 35 50 65 35 50 65	14(2) 23(2) 26(2) 14(2) 23(2) 26(2) 14(2) 23(2) 26(2)	10bit x 2	Multi-Function Timer x 1 unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	1	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable) Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)											
	MB9BF121L																																		
	MB9BF121M																																		
	MB9BF122K																																		
	MB9BF122L																																		
	MB9BF122M																																		
	MB9BF124K																																		
	MB9BF124L																																		
	MB9BF124M																																		
MB9B120J	MB9BF121J	72	LQFP-32 QFN-32	2.7 to 5.5	✓	FLASH	64K	8K	-	4	7	-	23	-	8(1)	-	Multi-Function Timer x 1 unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SW-DP)						
MB9B520T	MB9BF528S*	60	LQFP-144 LQFP-176 BGA-192 LQFP-144 LQFP-176 BGA-192	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K 1.5M +64K	160K 192K	- 8 32 ✓	122 154 122 154	- 24(2) 10bit x 2	Multi-Function Timer x 1 unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)														
	MB9BF528T*																																		
	MB9BF529S*																																		
	MB9BF529T*																																		
MB9B420T	MB9BF428S*	60	LQFP-144 LQFP-176 BGA-192 LQFP-144 LQFP-176 BGA-192	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K 1.5M +64K	160K 192K	- 8 32 ✓	122 154 122 154	- 24(2) 10bit x 2	Multi-Function Timer x 1 unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1 QPRC x 2 QPRC x 1 QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)														
	MB9BF428T*																																		
	MB9BF429S*																																		
	MB9BF429T*																																		

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMA C [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [bit/(unit)]	12bit AD Converter [bit/(unit)]	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LINUART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg com]	Three-phase Inverter	Note	Evaluation Device	
BASIC GROUP																																				
MB9B320T	MB9BF328S*	60	LQFP-144	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	<input checked="" type="checkbox"/>	122	154	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	- 1ch (USB-Host/ USB-Function Selectable)	-	<input checked="" type="checkbox"/>	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)								
	MB9BF328T*																																			
	MB9BF329S*		LQFP-144	1.5M +64K	192K									122	122	-																				
	MB9BF329T*		LQFP-176 BGA-192											154	-																					
MB9B120T	MB9BF128S*	60	LQFP-144	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	<input checked="" type="checkbox"/>	122	154	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	QPRC x 2	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)	- 1ch (USB-Host/ USB-Function Selectable)	-	<input checked="" type="checkbox"/>	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP/ETM)								
	MB9BF128T*													122	122	-																				
	MB9BF129S*		LQFP-144	1.5M +64K	192K									154	-																					
	MB9BF129T*		LQFP-176 BGA-192											154	-																					
MB9A420L	MB9AF421K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	<input checked="" type="checkbox"/>	FLASH	64K	4K	-	-	14	-	36	-	8(1)	10bit x 1	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 3ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	1 - - - -	<input checked="" type="checkbox"/>	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)											
	MB9AF421L		LOFP-64 QFN-64											19	19	-																				
MB9A120L	MB9AF121K	40	LQFP-48 LQFP-52 QFN-48	2.7 to 5.5	<input checked="" type="checkbox"/>	FLASH	64K	4K	-	-	14	-	36	-	8(1)	10bit x 1	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 3ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)	- - - -	<input checked="" type="checkbox"/>	Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)											
	MB9AF121L		LOFP-64 QFN-64											19	19	-																				

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: V _{CQ} [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [kByte]	DMAc [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer				Serial			Communication			LCD Controller [seg x com]			Three-phase inverter		Note	Evaluation Device
BASIC GROUP																																	
MB9A310A	MB9AF311LA	40	LQFP-64 QFN-64	2.7 to 5.5	✓	FLASH	64K	16K	-	8	8	- 11 16 16 11 7 11 16 11 16 16 16 16 16	51 66 83 51 66 66 51 66 66 83 83 66 83 83	9(2) 12(3) 16(3) 9(2) 12(3) 16(3) 9(2) 12(3) 16(3) 12(3) 16(3) 16(3) 16(3) 16(3)	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP/ETM)									
	MB9AF311MA		LQFP-80																						On-chip Debug (SWJ-DP)								
	MB9AF311NA		LQFP-100 QFP-100 BGA-112																						On-chip Debug (SWJ-DP/ETM)								
	MB9AF312LA		LQFP-64 QFN-64																						On-chip Debug (SWJ-DP)								
	MB9AF312MA		LQFP-80																						On-chip Debug (SWJ-DP)								
	MB9AF312NA		LQFP-100 QFP-100 BGA-112																						On-chip Debug (SWJ-DP/ETM)								
	MB9AF314LA		LQFP-64 QFN-64																						On-chip Debug (SWJ-DP)								
	MB9AF314MA		LQFP-80																						On-chip Debug (SWJ-DP/ETM)								
	MB9AF314NA		LQFP-100 QFP-100 BGA-112																						On-chip Debug (SWJ-DP)								
	MB9AF315MA		LQFP-80																						On-chip Debug (SWJ-DP/ETM)								
	MB9AF315NA		LQFP-100 QFP-100 BGA-112**																						On-chip Debug (SWJ-DP)								
	MB9AF316MA		LQFP-80																						On-chip Debug (SWJ-DP)								
	MB9AF316NA		LQFP-100 QFP-100 BGA-112**																						On-chip Debug (SWJ-DP/ETM)								

* In development; **Planning

FM3 Family – 32bit Microcontrollers

FM3 Family – 32bit Microcontrollers

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub-Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMA/C [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI/O [ch]	SIO [ch]	LIN/MAR/T/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
LOW-POWER GROUP																																				
MB9A340NA	MB9AF341LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	8	-	51		12(2)																	On-chip Debug (SWJ-DP)				
	MB9AF341MB		LQFP-80 BGA-96								11	✓	66		17(2)																					
	MB9AF341NB		LQFP-100 QFP-100 BGA-112								16		83		24(2)																					
	MB9AF342LB		LQFP-64 QFN-64								8	-	51		12(2)																					
	MB9AF342MB		LQFP-80 BGA-96								11	✓	66		17(2)																					
	MB9AF342NB		LQFP-100 QFP-100 BGA-112								16		83		24(2)																					
	MB9AF344LB		LQFP-64 QFN-64								8	-	51		12(2)																					
	MB9AF344MB		LQFP-80 BGA-96								11	✓	66		17(2)																					
	MB9AF344NB		LQFP-100 QFP-100 BGA-112								16		83		24(2)																					
MB9A140NA	MB9AF141LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	8	-	51		12(2)															On-chip Debug (SWJ-DP)						
	MB9AF141MB		LQFP-80 BGA-96								11	✓	66		17(2)																					
	MB9AF141NB		LQFP-100 QFP-100 BGA-112								16		83		24(2)																					
	MB9AF142LB		LQFP-64 QFN-64								8	-	51		12(2)																					
	MB9AF142MB		LQFP-80 BGA-96								11	✓	66		17(2)																					
	MB9AF142NB		LQFP-100 QFP-100 BGA-112								16		83		24(2)																					
	MB9AF144LB		LQFP-64 QFN-64								8	-	51		12(2)																					
	MB9AF144MB		LQFP-80 BGA-96								11	✓	66		17(2)																					
	MB9AF144NB		LQFP-100 QFP-100 BGA-112								16		83		24(2)																					

FM3 Family – 32bit Microcontrollers

FMO + Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: V _C [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Convert. [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWIC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
S6E1A	S6E1A11B0A	40	LQFP-32 QFN-32	2.7 to 5.5	✓	Flash	56K	6K	-	2	8	-	23	37	-	5(1)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 4ch (Reload/PPG/PWM/PWC Selectable)	QPRC x 1	1	Multi Function Serial x 3ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	-	-	Dual Timer, Real Time Clock, Unique ID, Fast I/O	On-chip Debug (SW-DP/MTB)							
	S6E1A11C0A		LOFP-48 LOFP-52 QFN-48																																	
	S6E1A12B0A		LOFP-32 QFN-32																																	
	S6E1A12C0A		LOFP-48 LOFP-52 QFN-48																																	
S6E1B8 w/security	S6E1B86GHA	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	-	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM 40 SEG x 8 COM / 36 SEG x 4 COM 32 SEG x 8 COM / 24 SEG x 4 COM	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F, Cipher	On-Chip Debug (SW-JDP/ Boundary SCAN)										
	S6E1B84GHA																																			
	S6E1B86FHA																																			
	S6E1B84FHA																																			
	S6E1B86EHA																																			
	S6E1B84EHA																																			
S6E1B8	S6E1B86G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	-	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM 32 SEG x 8 COM / 36 SEG x 4 COM 20 SEG x 8 COM / 24 SEG x 4 COM	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SW-JDP/ Boundary SCAN)										
	S6E1B84G0A																																			
	S6E1B86F0A																																			
	S6E1B84F0A																																			
	S6E1B86E0A																																			
	S6E1B84E0A																																			
S6E1B3	S6E1B36G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	-	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM 32 SEG x 8 COM / 36 SEG x 4 COM 20 SEG x 8 COM / 24 SEG x 4 COM	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SW-JDP/ Boundary SCAN)										
	S6E1B34G0A																																			
	S6E1B36F0A																																			
	S6E1B34F0A																																			
	S6E1B36E0A																																			
	S6E1B34E0A																																			
S6E1B1	S6E1B16G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	-	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I ² C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM 32 SEG x 8 COM / 36 SEG x 4 COM 20 SEG x 8 COM / 24 SEG x 4 COM	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SW-JDP/ Boundary SCAN)										
	S6E1B14G0A																																			
	S6E1B16F0A																																			
	S6E1B14F0A																																			
	S6E1B16E0A																																			
	S6E1B14E0A																																			

* In development; **Planning

FMO + Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VC _G [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DIMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Convertor [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	Serial	Communication	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device	
S6E1C3	S6E1C32D0A	40	LQFP-64	1.65 to 3.6	✓	Main Flash	128K	16K			12		54													Multi Function Serial x 6ch (UART/CSIO/I2C Selectable)	1ch (USB-Host/ USB-Function Selectable)	Dual Timer, Real Timer Clock, Unique ID, DSTC×64ch, Tiny I2S, Wakeup I2C, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP)			
	S6E1C31D0A						64K	12K			9		38																			
	S6E1C32C0A						128K	16K			5		20																			
	S6E1C31C0A		LQFP-32				128K	16K			7	-	24					4														
	S6E1C32B0A						64K	12K			12		54					6														
	S6E1C31B0A						128K	16K			9		38					8														
	S6E1C32D0A		QFN-64				64K	12K			12		54																			
	S6E1C31D0A						128K	16K			9		38																			
	S6E1C32C0A						64K	12K			12		54																			
	S6E1C31C0A		QFN-48				128K	16K			9		38					8														
	S6E1C32B0A						64K	12K			12		54																			
	S6E1C31B0A						128K	16K			9		38																			
S6E1C1	S6E1C12D0A	40	LQFP-64	1.65 to 3.6	✓	Main Flash	128K	16K			12		54					8								Multi Function Serial x 6ch (UART/CSIO/I2C Selectable)	1ch (USB-Host/ USB-Function Selectable)	Dual Timer, Real Timer Clock, Unique ID, DSTC×64ch, Tiny I2S, Wakeup I2C, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP)			
	S6E1C11D0A						64K	12K			9		38																			
	S6E1C12C0A						128K	16K			7		24					6														
	S6E1C11C0A		LQFP-32				128K	16K			12		54																			
	S6E1C12B0A						64K	12K			9		38																			
	S6E1C11B0A						128K	16K			7		24																			
	S6E1C12D0A		QFN-64				128K	16K			12		54																			
	S6E1C11D0A						64K	12K			9		38																			
	S6E1C12C0A						128K	16K			7		24																			
	S6E1C11C0A		QFN-48				128K	16K			9		38																			
	S6E1C12B0A						64K	12K			7		24																			
	S6E1C11B0A						128K	16K			7		24																			

8FX – 8bit Microcontrollers

8FX – 8bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC/V	Sub-Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMA/C [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I²C [ch]	UART/SI [ch]	SIO [ch]	LINUART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
STANDARD																																				
MB95650L	MB95F652E	16	TSSOP-24 SOP-24 QFN-32	1.8 to 5.5	✓	Dual Op. Flash	8K	256					21																							
	MB95F652L						12K	512	-	-	6	-	20																							
	MB95F653E						20K	1024					21																							
	MB95F653L						36K						20																							
	MB95F654E												21																							
	MB95F654L												20																							
	MB95F656E												21																							
	MB95F656L												20																							
MB95810K	MB95F814K	16	LQFP-64	2.88 to 5.5	✓	Dual Op. Flash	20K	512					12(1)																							
	MB95F816K						36K	1K	-	-	12	-	58																							
	MB95F818K						60K	2K	-	-																										
Advanced																																				
High Performance																																				
Low Power																																				
Industrial																																				
Power Management																																				
RF																																				
Automotive																																				
Medical																																				
Consumer																																				
Medical																																				
Industrial																																				
Military																																				
Space																																				
Telecommunications																																				
Medical																																				
Industrial																																				
Military																																				
Space																																				
Telecommunications																																				
Medical																																				
Industrial																																				
Military																																				
Space																																				
Telecommunications																																				
Medical																																				
Industrial																																				
Military																																				
Space																																				
Telecommunications																																				
Medical																																				

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMA[C [ch]]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC/Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other Timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
CAN/AUTOMOTIVE																																				
MB9D560	MB9DF564MA	200	TEQFP-208	1.1 to 1.3 4.5 to 5.5	Main Flash + Work Flash	(640K + 64K) x2	64K x2			16	8	-	125	149	32(1)	8(2)	10bit x 2	32bitFree-Run Timer x 5ch 32bitInput Capture x 3unit 6ch 16bitFree-Run Timer x 20ch 16bit Input Capture x 8unit 15ch 16bitOutput Compare x 12unit 24ch Waveform Generator x 4unit 24ch	16bit Base Timer x 12ch (PWM/PPG/Reload/PWC Selectable)	4	-	Multi Function Serial x 5ch (LIN/UART/SIO Selectable)	3	-	-	-	-	-	ARM Cortex-R5 CAN: 64msb, RDC x 2unit, Motor vector accelerato x 2unit Models with A suffix on part number have no built-in FlexRay. Models with G suffix on part number have built-in FlexRay.	On-Chip Debug						
	MB9DF564MG					(896K + 64K) x2	96K x2																													
	MB9DF565MA					(1152K + 64K) x2	128K x2																													
	MB9DF565MG					(640K + 64K) x 2	64K x 2																													
	MB9DF566MA					(896K + 64K) x 2	96K x 2																													
	MB9DF566MG					(1152K + 64K) x 2	128K x 2																													
	MB9DF564ML					(640K + 64K) x 2	64K x 2																													
	MB9DF564MQ					(896K + 64K) x 2	96K x 2																													
	MB9DF565ML					(1152K + 64K) x 2	128K x 2																													
	MB9DF565MQ					(640K + 64K) x 2	64K x 2																													
	MB9DF566ML					(896K + 64K) x 2	96K x 2																													
	MB9DF566MQ					(1152K + 64K) x 2	128K x 2																													
	MB9DF564LA	TEQFP-176				(640K + 64K) x 2	64K x 2																													
	MB9DF564LG					(896K + 64K) x 2	96K x 2																													
	MB9DF565LA					(1152K + 64K) x 2	128K x 2																													
	MB9DF565LG					(640K + 64K) x 2	64K x 2																													
	MB9DF566LA					(896K + 64K) x 2	96K x 2																													
	MB9DF566LG					(1152K + 64K) x 2	128K x 2																													
	MB9DF564LL					(640K + 64K) x 2	64K x 2																													
	MB9DF564LQ					(896K + 64K) x 2	96K x 2																													
	MB9DF565LL					(1152K + 64K) x 2	128K x 2																													
	MB9DF565LQ					(640K + 64K) x 2	64K x 2																													
	MB9DF566LL					(896K + 64K) x 2	96K x 2																													
	MB9DF566LQ					(1152K + 64K) x 2	128K x 2																													

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMA[C [ch]]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other Timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LINUART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
CAN/AUTOMOTIVE																																				
S6J3110	S6J3118HA	96	TEQFP -144	4.5 to 5.25	Main Flash + Work Flash	576K + 48K	TC-RAM: 32KB System - RAM: 16KB Backup - RAM: 8KB	116	Instruction: 16 Data: 16	56(2)	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	RTC x 1ch	Multi Function Serial x 4ch (LIN/UART/SIO Selectable)	CAN - FD x 1ch	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	ARM Cortex-R5, SHE(Secure Hardware Extension),	On-Chip Debug		
	S6J3119HA					832K + 48K	TC-RAM: 48KB System - RAM: 16KB Backup - RAM: 8KB																													
	S6J311AHA					1088K + 48K	TC-RAM: 64KB System - RAM: 16KB Backup - RAM: 8KB																													
	S6J311BHA					1600K + 112K	192K																													
	S6J311CHA					2112K + 112K	256K																													
	S6J311DHA					3136K + 112K	320K																													
	S6J311EHA		TEQFP -176			4160K + 112K	TC-RAM: 64KB System - RAM: 256KB Backup - RAM: 64KB																													
	S6J311BJA					1600K + 112K	192K																													
	S6J311CJA					2112K + 112K	256K																													
	S6J311DJA					3136K + 112K	320K																													
	S6J311EJA					4160K + 112K	TC-RAM: 64KB System - RAM: 256KB Backup - RAM: 64KB																													

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMA[C][ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other Timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
CAN/AUTOMOTIVE																																				
S6J3120	S6J3128HA	112	TEQFP -144	4.5 to 5.25	-	Main Flash +Work Flash	576K + 48K	TC-RAM: 32KB System - RAM: 16KB Backup - RAM: 8KB	Instruction: 16 Data: 16	16	16	A24/D16	112	50(2)	-	-	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 10ch (LIN/UART/SIO Selectable)	CAN - FD x 3ch	-	-	32 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 4ch, Sound generator x 3ch	On-Chip Debug						
	S6J3129HA																																			
	S6J312AHA																																			
S6J3200	S6J32AAKS	160	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	1088K + 112K	TC-RAM: 48KB System - RAM: 16KB Backup - RAM: 8KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 1ch	On-Chip Debug							
	S6J32AAKU																																			
	S6J32AALS																																			
	S6J32AALU																																			
	S6J32BAKS																																			
	S6J32BAKU																																			
	S6J32BALS																																			
	S6J32BALU																																			
	S6J32CAKS																																			
	S6J32CAKU																																			
	S6J32CALS																																			
	S6J32CALU																																			
	S6J32DAKS																																			
	S6J32DAKU																																			
	S6J32DALS																																			
	S6J32DALU																																			

Traveo Family – 32bit Microcontrollers

FCR4 Family – 32bit Microcontrollers

FR Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Output Compare [ch]	FreeRun Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	Serial	Communication	LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
CAN/AUTOMOTIVE																															
MB91520	MB91F522B	80	LQFP-64	2.7 to 5.5	Main Flash + Work Flash	* See "part number suffix" in Note	320K+64K 448K+64K 576K+64K 832K+64K 1088K+64K 320K+64K 448K+64K 576K+64K 832K+64K 1088K+64K 320K+64K 448K+64K 576K+64K 832K+64K 1088K+64K 320K+64K 448K+64K 576K+64K 832K+64K 1088K+64K	56K 72K 104K 136K 56K 72K 104K 136K 56K 72K 104K 136K 56K 72K 104K 136K 56K 72K 104K 136K	- 16 16 - 76 96	44 56 16(1) 16(1) 16(1) 16(1) 8bit x 1 8bit x 2 16(1) 16(1)	13(1) 13(1) 16(1) 16(1) 16(1) 16(1) 16bit x 3 32bit x 1 16bit x 4 32bit x 5 16bit x 6 32bit x 4 16bit x 3 32bit x 2 16bit x 4 32bit x 6	+ PPG Timer x 21ch (Reload/PPG/PWM/PWC Selectable) + PPG Timer x 27ch + Base Timer x 1ch (Reload/PPG/PWM/PWC Selectable) + PPG Timer x 8ch + Base Timer x 1ch (Reload/PPG/PWM/PWC Selectable) + PPG Timer x 8ch + Base Timer x 2ch (Reload/PPG/PWM/PWC Selectable)	2 - 2 3	Multi Function Serial x 8ch (LIN/UART/SIO/I2C Selectable) Multi Function Serial x 9ch (LIN/UART/SIO/I2C Selectable) Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	- - - - ✓	LIN, FPU, MPU, Tuning RAM MB91520B/D/F/J/K/L series: CAN: 64Msg-buffer x 2ch, 128Msg-buffer x 1ch, MB91520R/U/M/Y series: CAN: 128Msg-buffer x 6ch, FlexRay: 1 unit	Details of part number suffix <table border="1"><tr><td></td><td>Dual clock system</td></tr><tr><td>xWC</td><td>xJC</td></tr><tr><td>CSV initial value</td><td>ON OFF</td></tr></table> <table border="1"><tr><td></td><td>Single clock system</td></tr><tr><td>xSC</td><td>xHC</td></tr><tr><td>CSV initial value</td><td>ON OFF</td></tr></table>		Dual clock system	xWC	xJC	CSV initial value	ON OFF		Single clock system	xSC	xHC	CSV initial value	ON OFF	On-chip Debug	
	Dual clock system																														
xWC	xJC																														
CSV initial value	ON OFF																														
	Single clock system																														
xSC	xHC																														
CSV initial value	ON OFF																														
MB91F523B																															
MB91F524K																															
MB91F525K	LQFP-144																														
MB91F526K																															
MB91F527R	LQFP-144 TEQFP-144																														
MB91F528R																															
MB91F522L	LQFP-176																														
MB91F523L																															
MB91F524L	LQFP-176 TEQFP-176																														
MB91F525L																															
MB91F526L																															
MB91F527U																															
MB91F528U	LQFP-208 TEQFP-208																														
MB91F527M																															
MB91F528M																															
MB91F527Y	BGA-416																														
MB91F528Y																															
MB91550	MB91F552	80	LQFP-64	4.5 to 5.5	- Main Flash + Work Flash	192K+64K	24K	-	8	4	-	30	-	8(1) 4ch S/ H(1)	-	-	1	1	Reload Timer x 5ch + PWM Timer x 6ch (2ch x 3 pairs) + PWC Timer x 2ch + Base Timer x 4ch (Reload/PPG/PWM/PWC Selectable)	-	-	Multi Function Serial x 3ch (UART/SIO/LIN Selectable)	-	1	-	-	-	-	Comparator: 3ch, Slope Compensation: 1ch	On-Chip Debug	

FR Family – 32bit Microcontrollers

FR Family – 32bit Microcontrollers

F²MC-16FX – 16bit Microcontrollers

F²MC-16FX – 16bit Microcontrollers

F²MC-16FX – 16bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: V _{CC} [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer				Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device			
AUTOMOTIVE																																	
MB96610	MB96F612A	32	LQFP-48	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash	32.5K +32K	4K	10K	-	2	11	-	(Single clock) 37 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	-	-	-	-	-	1 1 1 1 1 1	Option without CAN	On-chip Debug
	MB96F612R						64.5K +32K	10K		-	2	11	-	(Single clock) 35 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	-	-	-	-	-	1 1 1 1 1 1		
	MB96F613A						128.5K +32K	10K		-	2	11	-	(Single clock) 37 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	-	-	-	-	-	1 1 1 1 1 1		
	MB96F613R						128.5K +32K	10K		-	2	11	-	(Single clock) 37 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	-	-	-	-	-	1 1 1 1 1 1		
	MB96F615A						128.5K +32K	10K		-	2	11	-	(Single clock) 37 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	-	-	-	-	-	1 1 1 1 1 1		
	MB96F615R						128.5K +32K	10K		-	2	11	-	(Single clock) 37 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	-	-	-	-	-	1 1 1 1 1 1		
MB96620	MB96F622A	32	LQFP-64	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash	32.5K +32K	4K	10K	-	2	13	-	(Single clock) 52 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	1	-	-	-	3	- 1 1 1 1 1	Option without CAN	On-chip Debug
	MB96F622R						64.5K +32K	10K		-	2	13	-	(Single clock) 52 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	1	-	-	-	3	- 1 1 1 1 1		
	MB96F623A						128.5K +32K	10K		-	2	13	-	(Single clock) 52 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	1	-	-	-	3	- 1 1 1 1 1		
	MB96F623R						128.5K +32K	10K		-	2	13	-	(Single clock) 52 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	1	-	-	-	3	- 1 1 1 1 1		
	MB96F625A						128.5K +32K	10K		-	2	13	-	(Single clock) 52 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	1	-	-	-	3	- 1 1 1 1 1		
	MB96F625R						128.5K +32K	10K		-	2	13	-	(Single clock) 52 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	QPRC x 2	1	-	-	-	3	- 1 1 1 1 1		
MB96630	MB96F633A	32	LQFP-80	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash	64.5K +32K	10K	16K	-	4	15	-	(Single clock) 64 66 (Dual clock)	21(1)	-	-	7	3	6 +1 (Dedicated for LIN)	3	-	-	8bit x 20 16bit x 15	QPRC x 2	2	-	-	-	5	- 1 1 1 1 1	Option without CAN	On-chip Debug
	MB96F633R						128.5K +32K	10K		-	4	15	-	(Single clock) 64 66 (Dual clock)	21(1)	-	-	7	3	6 +1 (Dedicated for LIN)	3	-	-	8bit x 20 16bit x 15	QPRC x 2	2	-	-	-	5	- 1 1 1 1 1		
	MB96F635A						256.5K +32K	24K		-	4	15	-	(Single clock) 64 66 (Dual clock)	21(1)	-	-	7	3	6 +1 (Dedicated for LIN)	3	-	-	8bit x 20 16bit x 15	QPRC x 2	2	-	-	-	5	- 1 1 1 1 1		
	MB96F635R						384.5K +32K	28K		-	4	15	-	(Single clock) 64 66 (Dual clock)	21(1)	-	-	7	3	6 +1 (Dedicated for LIN)	3	-	-	8bit x 20 16bit x 15	QPRC x 2	2	-	-	-	5	- 1 1 1 1 1		
	MB96F636R						128.5K +32K	10K		-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F643A						256.5K +32K	24K		-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
MB96640	MB96F643R	32	LQFP-100	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash	64.5K +32K	10K	16K	-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1	Option without CAN	On-chip Debug
	MB96F645A						128.5K +32K	10K		-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F645R						256.5K +32K	24K		-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F646R						384.5K +32K	28K		-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F647R						128.5K +32K	10K		-	4	16	-	(Single clock) 81 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F653A						256.5K +32K	24K		-	4	16	-	(Single clock) 101 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
MB96650	MB96F653R	32	LQFP-120	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash	64.5K +32K	10K	16K	-	4	16	-	(Single clock) 101 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1	Option without CAN	On-chip Debug
	MB96F655A						128.5K +32K	10K		-	4	16	-	(Single clock) 101 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F655R						256.5K +32K	24K		-	4	16	-	(Single clock) 101 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F656R						384.5K +32K	28K		-	4	16	-	(Single clock) 101 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	QPRC x 2	2	-	-	-	6	- 1 1 1 1 1		
	MB96F673A						64.5K +32K	4K	16K	-	2	7	-	(Single clock) 50 48 (Dual clock)	12(1)	-	-	2	4	3	-	-	8bit x 8 16bit x 4	-	1	-	-	2	- 1 1 1	SMC x 2ch Sound generator Option without CAN	On-chip Debug		
	MB96F673R						128.5K +32K	4K		-	2	7	-	(Single clock) 50 48 (Dual clock)	12(1)	-	-	2	4	3	-	-	8bit x 8 16bit x 4	-	1	-	-	2	- 1 1 1				
	MB96F675A						256.5K +32K	4K		-	2	7	-	(Single clock) 50 48 (Dual clock)	12(1)	-	-	2	4	3	-	-	8bit x 8 16bit x 4	-	1	-	-	2	- 1 1 1				
	MB96F675R						384.5K +32K	4K		-	2	7	-	(Single clock) 50 48 (Dual clock)	12(1)	-	-	2	4	3	-	-	8bit x 8 16bit x 4	-	1	-	-	2	- 1 1 1				
MB96680	MB96F683A	32	LQFP-80	2.7 to 5.5	<input checked="" type="checkbox"/>	Dual Op. Flash	64.5K +32K	4K	16K	-	2	7	-	(Single clock) 65 63 (Dual clock)	14(1)	-	-	2	4	3	-	-	8bit x 8 16bit x 4	-	1	-	-	2	- 1 1 1	SMC x 2ch Sound generator Option without CAN	On-chip Debug		
	MB96F683R						128.5K +																										



Cypress Semiconductor Corporation

198 Champion Court, San Jose CA 95134

phone +1 408.943.2600 fax +1 408.943.6848

toll free +1 800.858.1810 (U.S. only) Press "1" to reach your local sales representative

© 2015 Cypress Semiconductor Corporation. All rights reserved. All other trademarks are the property of their respective owners.

Doc# 002-06949 Rev.*A