


REV. 1  
DCO 16124

COIL: @ +25 °C	
RESISTANCE	27 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.7 VDC
MUST RELEASE	1.65 VDC MAX, 0.29 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX  
CONTACT BOUNCE 2 MS MAX  
ALL OTHER REQUIREMENTS TO MIL-R-39016 LEVEL L

CUSTOMER DATA SHEET

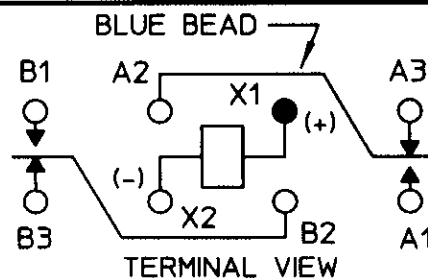

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. R.B. 5/29/96 CK. GPH 2/21/00



CUST. QPL  
CUST. NO. M39016/6-139L

TYPE "HFW" RELAY

HFW1201L01