


Command® Series Home Entertainment Speaker Cable

NEC Type CL3, CSA, CMG, AWM I/II A/B

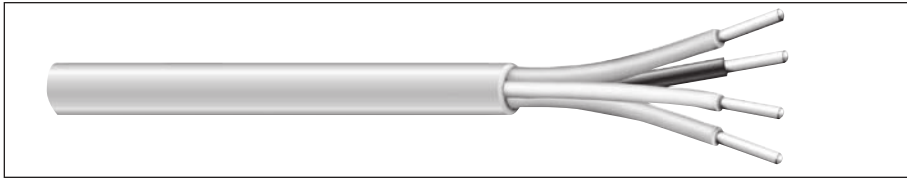

| CATALOG NUMBER | NO. OF COND. | AWG SIZE | COND. STRAND | NOM. INSULATION WALL | | NOM. JACKET THICKNESS | | NOMINAL O.D. | |
|----------------|--------------|----------|--------------|----------------------|------|-----------------------|------|--------------|------|
| | | | | INCHES | mm | INCHES | mm | INCHES | mm |
| C1700† | 2 | 12 | 65/30 | 0.009 | 0.15 | 0.021 | 0.53 | 0.254 | 6.45 |
| C1701† | 4 | 12 | 65/30 | 0.009 | 0.15 | 0.021 | 0.53 | 0.299 | 7.59 |
| C1702† | 2 | 14 | 41/30 | 0.009 | 0.15 | 0.021 | 0.53 | 0.220 | 5.59 |
| C1703† | 4 | 14 | 41/30 | 0.009 | 0.15 | 0.021 | 0.53 | 0.257 | 6.53 |
| C1704 | 2 | 16 | 26/30 | 0.009 | 0.15 | 0.021 | 0.53 | 0.191 | 4.85 |
| C1705 | 4 | 16 | 26/30 | 0.009 | 0.15 | 0.021 | 0.53 | 0.222 | 5.64 |

†CL3, CSA AWM I/II A/B only

Color Code Chart

| NO. OF COND. | COLOR |
|--------------|-------|
| 1 | Black |
| 2 | Red |
| 3 | White |
| 4 | Green |

Product Construction:

Conductor:

- 12, 14, 16, or 18 AWG fully annealed, stranded bare copper per ASTM B-8

Insulation:

- Premium-grade, color-coded polypropylene
- Color code: See chart below

Jacket:

- PVC, command blue
- Temperature range: -20°C to +60°C

Applications:

- Digital audio
- Stereo systems
- In-wall speakers
- Home theater
- Remote control circuits
- Security systems
- Bi-amp speakers

Features:

- Flexible

Compliances:

- NEC Article 725 Type CL3 (UL: 60°C)
- CSA, CMG, AWM I/II A/B
- RoHS Compliant Directive 2002/95/EC
- Designed to meet UL 70,000 BTU Vertical Tray Flame Test
- Passes CSA FT-4 Vertical Flame Test

Packaging:

- Please contact Customer Service for packaging and color options

