



POS.	Α	В	С	D	Ε	F	G
15	1.213	0.984	0.644	0.756	0.311	0.090	0.496
	30.80	24.99	16.34	19.20	7.90	2.29	12.60
26	1.541	1.312	0.966	1.091	0.311	0.090	0.496
	39.15	33.32	24.53	27.70	7.90	2.29	12.60
44	2.087	1.852	1.512	1.618	0.311	0.090	0.496
	53.00	47.04	38.40	41.10	7.90	2.29	12.60
62	2.728	2.500	2.156	2.256	0.311	0.095	0.496
	69.30	63.50	54.76	57.30	7.90	2.41	12.60
78	2.079	2.406	2.057	2.169	0.429	0.095	0.606
	52.81	61.00	52.26	55.10	10.90	2.41	15.39



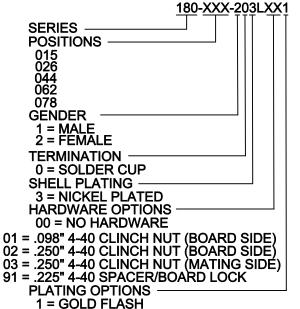

ELECTRICALS:

CURRENT RATING: 2 AMPS

CONTACT RESISTANCE: 15 mOHMS MAX. INSULATOR RESISTANCE: 1000MOHMS MIN.

VOLTAGE: 500V FOR 1 MINUTE TEMPERATURE: -50° TO +100°


MATERIALS:

SHELL: STEEL, NICKEL PLATED

INSULATOR: PBT - BLACK (UL-94-VO)

RoHS COMPLIANT

NOTE: WILL ACCEPT UP TO 24 AWG WIRE

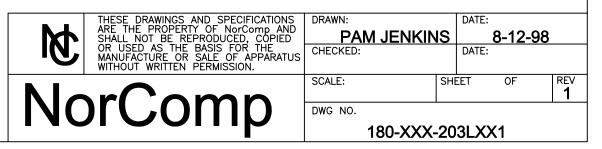

DESCRIPTION: CLINCH NUT HARDWARE


ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS




03X..... .250" (MATING SIDE) - CN8



02X250" (BOARD SIDE) - CN2



01X098" (BOARD SIDE) - CN1



91X225" (BOARD SIDE) - .197 MATING SIDE - CN10/SFSO440

NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

	M	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	WAYNE ROBBINS		DATE: 8-23-98 DATE: 8-24-98		
	NIO	rComp	SCALE:	SHEET	OF 1	0 21 00	REV 1
1401 Collip			DWG NO. CLINCH—NUT OPTIONS				