


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3	F		ECN 387	06/09/95	C.T.

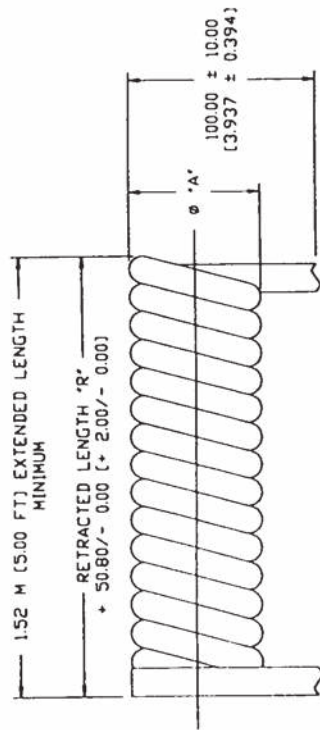

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=90
5	457.20	(18.000)	L=13.00" X W=20.00" X H=90
6	558.80	(22.000)	L=13.00" X W=25.00" X H=90
CONDUCTORS		MILLIMETERS	DIMENSION MAX.
NUMBER OF		RETRACTED LENGTH 'R'	OUTSIDE SHIPPING BOX

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: *W/AM* 06/09/95
E: *W/AM* 06/09/95


TITLE: 26 AWG (12/0.12 mm) BARE COPP 500 FT EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE

CHKD: *[Signature]* PART NO: 121-X10-0X3

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 0.35 (0.250)


CUSTOMER: I/O INTERCONNECT

SCALE: NONE SHEET 2 OF 2



THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO. X10-0X2	ZONE (REV.) 1	DESCRIPTION ESN 387	DATE 06/09/95	APPROV. C.T.
---------------------	------------------	------------------------	------------------	-----------------

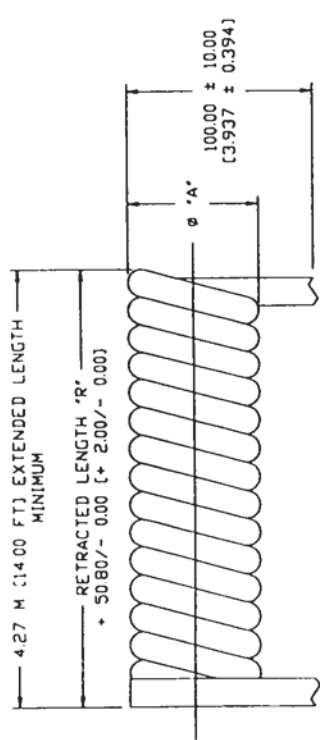

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	(34.000)	L=13.00" X W=40.00" X H=9.00
6	1117.60	(44.000)	L=13.00" X W=50.00" X H=9.00
B	1270.00	(50.000)	L=13.00" X W=55.00" X H=9.00
CONDUCTORS		MILLIMETERS	DIMENSION MAX
NUMBER OF		RETRACTED LENGTH "R"	OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT SANTA ANA, CALIFORNIA	
DR. DATE C. WANG 06/09/95	TITLE 35 AWG (12/0.12 MM) BARE COPPER 14.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE
CHKD. <i>Kanlary</i>	PART NO. 121-X10-0X2
CHKD. <i>[Signature]</i>	CUSTOMER: I/O INTERCONNECT
CHKD. <i>[Signature]</i>	SCALE: NONE SHEET 2 OF

THIRD ANGLE PROJECTION




UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETER (INCHES)
 2) TOLERANCES:
 X.X ± 0.20 (0.008)
 X.XX ± 0.35 (0.250)

[Signature] 6/10/95

DWG. NO	ZONE	REV	DESCRIPTION	DATE	APPROVE
X10-0X1		I	ECN 387	06/09/95	G.T

PLEASE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PARTS OR SUBASSEMBLIES TO BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES

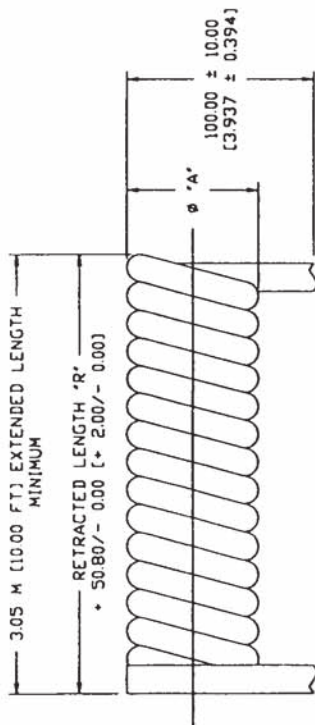

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	762.00	[30.000]	L=13.00" X W=35.00" X H=9.00"
5	812.80	[32.000]	L=13.00" X W=35.00" X H=9.00"
6	1066.80	[42.000]	L=13.00" X W=45.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH 'R'		OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT SANTA ANA, CALIFORNIA	
DR	DR Cptly
CHKD	CHKD
TITLE: 25 AWG 42/0.12 (max) BARE COPPER 10.00 FT EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE	
PART NO	121-X10-0X1
CUSTOMER	I/O INTERCONNECT
REV	1
SCALE	NONE
SHEET	2 OF 2


THIRD ANGLE PROJECTION



UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETER (INCHES)
 2) TOLERANCES:
 X.X ± 0.20 (0.008)
 X.XX ± 0.35 (0.250)

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-0X0	D	ECN 387	06/09/95	G.T.

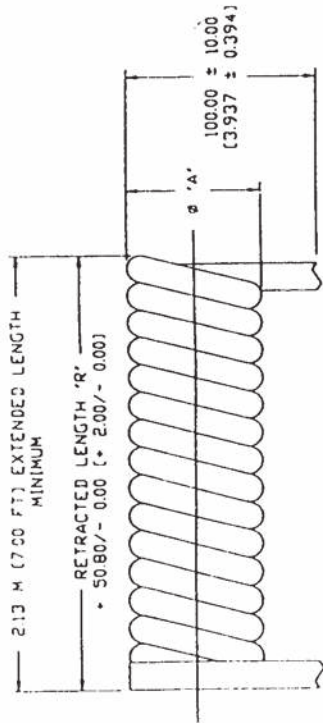

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

#	533-40	(21,000)	L=13.00" X W=25.00" X H=9.00"
6	609-60	(24,000)	L=13.00" X W=25.00" X H=9.00"
B	711-20	(28,000)	L=13.00" X W=30.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX

I/O INTERCONNECT
SANTA ANA, CALIFORNIA


DR. CAVY (H/M/M) TITLE: 26 AVG (12/0.12 mm) BARE COP
C. VAN 06/09/95 7.00 FT. EXTENDED, NON-UL
UNSHIELDED, MODULAR CABLE

CHKD: *Valley* PART NO: 121-X10-0X0
CHKD: *Trillong* CUSTOMER: I/O
CHKD: *Robt* SCALE: NONE SHEET 2 OF 2
CHKD: *Wife*


THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
X.XX ± 6.35 (0.250)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. I/O INTERCONNECT, INC. SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

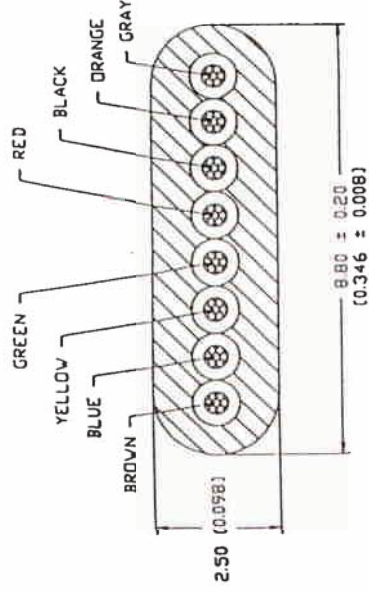

8 CONDUCTOR CABLE

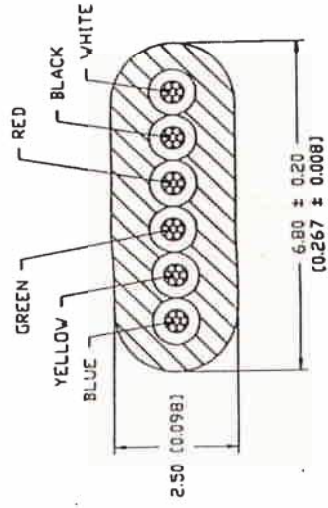

6 CONDUCTOR CABLE

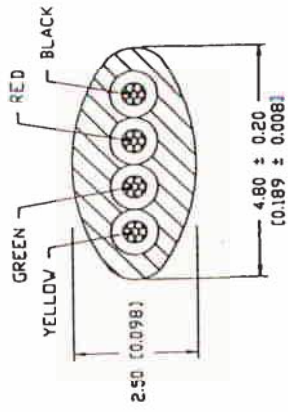

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED:

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/0.12 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-000	4	SILVER SATIN	0.551 ± 0.039
121-410-010	4	BLACK	14.00 ± 1.00
121-410-020	4	WHITE	0.551 ± 0.039
121-610-000	6	SILVER SATIN	14.00 ± 1.00
121-610-010	6	BLACK	0.551 ± 0.039
121-610-020	6	WHITE	14.00 ± 1.00
121-810-000	8	SILVER SATIN	0.551 ± 0.039
121-810-010	8	BLACK	14.00 ± 1.00
121-810-020	8	WHITE	0.551 ± 0.039
I/O INTERCONNECT PART NUMBER		NUMBER OF CONDUCTORS	Ø "A"

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: CHM WWS
C: VAG 06/09/95

TITLE: 26 AWG (12/0.12 mm) BARE COPPER 7.00 FT EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE

PART NO: 121-X10-0X0

CUSTOMER: I/O INTERCONNECT


SCALE: NONE

SHEET 1 OF 1


UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
X.X ± 0.20 (0.008)
X.XX ± 6.35 (0.250)

THIRD ANGLE PROJECTION


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. USA, AND SHALL BE KEPT AS COPIES OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

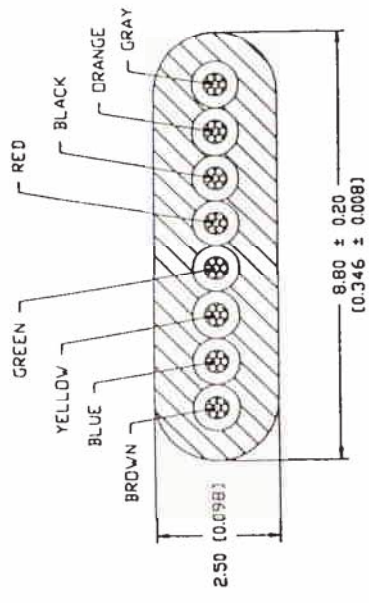

8 CONDUCTOR CABLE

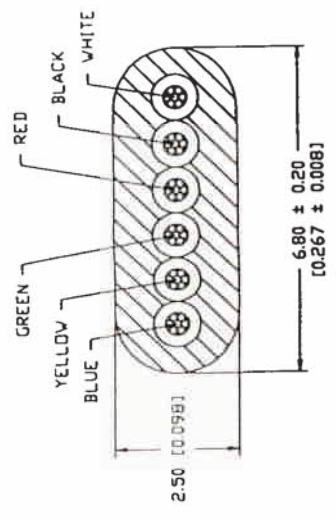

6 CONDUCTOR CABLE

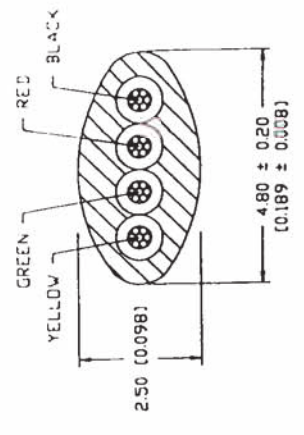

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.551] ± 0.0	[14.00] ± 1.0	φ 'A'
121-410-013	4	BLACK	[0.551] ± 0.0	[14.00] ± 1.0	
121-410-023	4	WHITE	[0.551] ± 0.0	[14.00] ± 1.0	
121-610-003	6	SILVER SATIN	[0.551] ± 0.0	[14.00] ± 1.0	
121-610-013	6	BLACK	[0.551] ± 0.0	[14.00] ± 1.0	
121-610-023	6	WHITE	[0.551] ± 0.0	[14.00] ± 1.0	
121-810-003	8	SILVER SATIN	[0.748] ± 0.0	[19.00] ± 1.1	
121-810-013	8	BLACK	[0.748] ± 0.0	[19.00] ± 1.1	
121-810-023	8	WHITE	[0.748] ± 0.0	[19.00] ± 1.1	
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR			

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: *TECH WONG* TITLE: 26 AWG (12/012 mm) BARE COPPER
C. WANG 06/09/95 5.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE


CHKD: *Karl Long* PART NO: 121-X10-0X3
CUSTO: I/O INTERCONNECT

SCALE: NONE SHEET 1 OF 1

REV. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
210-003		G	CON BACS	07/15/78	R.L.

1
2
3
4
5

ALL DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. ALL RIGHTS ARE RESERVED. NO PARTS OR MATERIALS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

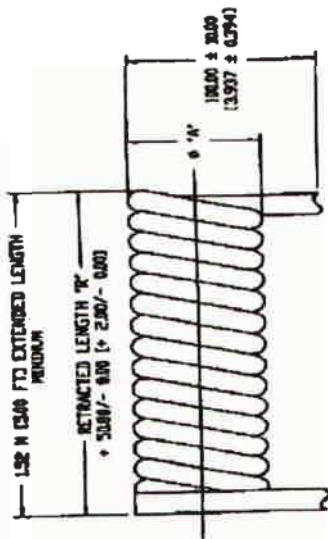

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.01 CONDUCTORS 26 AWG (0.712 mm) STAMPED BARE COPPER
- 1.02 INSULATION POLYPROPYLENE
- 1.03 COLOR PER CALLOUT
- 1.04 PACKAGING (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.01 TEMPERATURE & VOLTAGE RATING 80°C 30 V
- 2.02 CONDUCTORS RESISTANCE 140 OHMS/KM MAX AT 20°C
- 2.03 INSULATION RESISTANCE 100 MEGOHMS/KM MIN AT 20°C
- 2.04 CAPACITANCE IS 19 P/F/KM (MIN)
- 2.05 DIELECTRIC TEST AC-50KV PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE END SECTION.
- 3.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

CONDUCTORS	431.00	(17.000)	L=13.00" X W=28.00" X H=9.00"
NUMBER OF	457.20	(18.000)	L=13.00" X W=28.00" X H=9.00"
	509.60	(20.000)	L=13.00" X W=28.00" X H=9.00"
	609.60	(24.000)	L=13.00" X W=28.00" X H=9.00"
CONDUCTORS	DIMENSION INCH		
NUMBER OF	RETRACTED LENGTH "N"		

FABRICATION BLOCK

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DATE: 07/15/78
DRAWN BY: R.L.
CHECKED BY: R.L.

PART NO: 12-100-003


QUANTITY: 457.20

UNIT PRICE: \$1.25


TOTAL: \$571.50

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES (INCHES)
XX ± 0.20 (0.008)
XXX ± 0.25 (0.010)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO DATA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

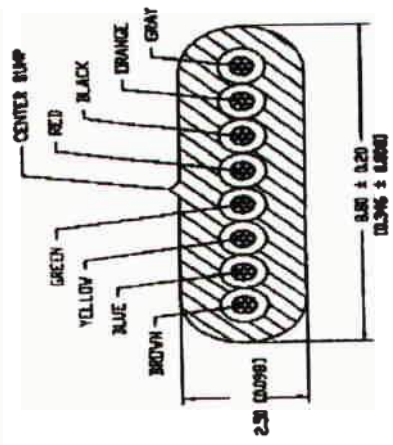


4 CONDUCTOR CABLE

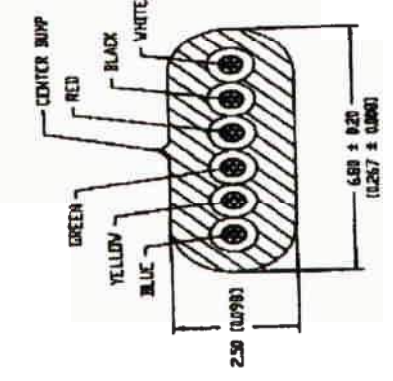

6 CONDUCTOR CABLE

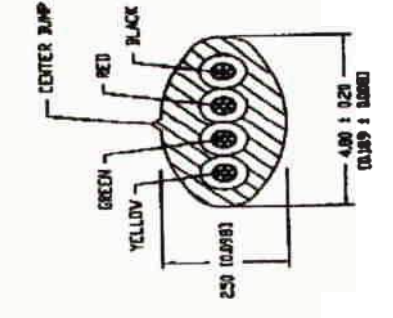

4 CONDUCTOR CABLE

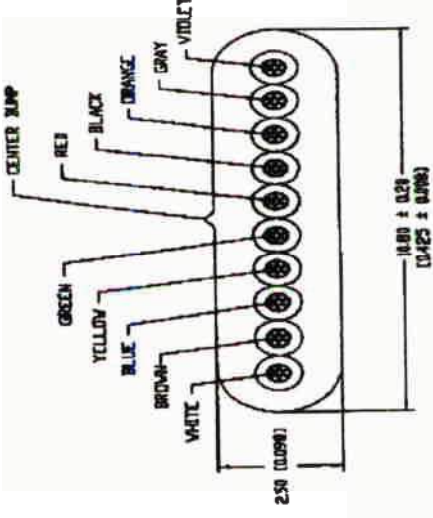

10 CONDUCTOR CABLE

121-410-000	4	SILVER SATIN	(0.551 ± 0.029)
121-410-010	4	BLACK	14.00 ± 1.00 (0.551 ± 0.029)
121-410-020	4	WHITE	14.00 ± 1.00 (0.551 ± 0.029)
121-610-000	6	SILVER SATIN	14.00 ± 1.00 (0.551 ± 0.029)
121-610-010	6	BLACK	14.00 ± 1.00 (0.551 ± 0.029)
121-610-020	6	WHITE	14.00 ± 1.00 (0.551 ± 0.029)
121-810-000	8	SILVER SATIN	(0.748 ± 0.029) 19.00 ± 1.00
121-810-010	8	BLACK	(0.748 ± 0.029) 19.00 ± 1.00
121-810-020	8	WHITE	(0.748 ± 0.029) 19.00 ± 1.00
121-100-000	10	SILVER SATIN	(0.748 ± 0.029) 19.00 ± 1.00
121-100-010	10	BLACK	(0.748 ± 0.029) 19.00 ± 1.00
121-100-020	10	WHITE	(0.748 ± 0.029) 19.00 ± 1.00
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø IN

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

1) UNLESS OTHERWISE NOTED
 DIMENSIONS ARE IN MILLIMETER (DIMES)
 2) TOLERANCES
 XXX ± 0.25 (0.009)
 XXX ± 0.50 (0.025)

THIRD ANGLE PROJECTION

1/10 INTERCONNECT
 PART NO. 121-110-000
 QTY. 1000
 DATE 1/10/78
 DESIGNED BY: [Signature]
 CHECKED BY: [Signature]
 UNUSHELED, MODULAR CABLE
 1/8" AVG (12/AL2) AND BARE COPPER
 7.00 FT. EXTENDED, NON-IL.

REV. 1 OF 2
 I/O INTERCONNECT