


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

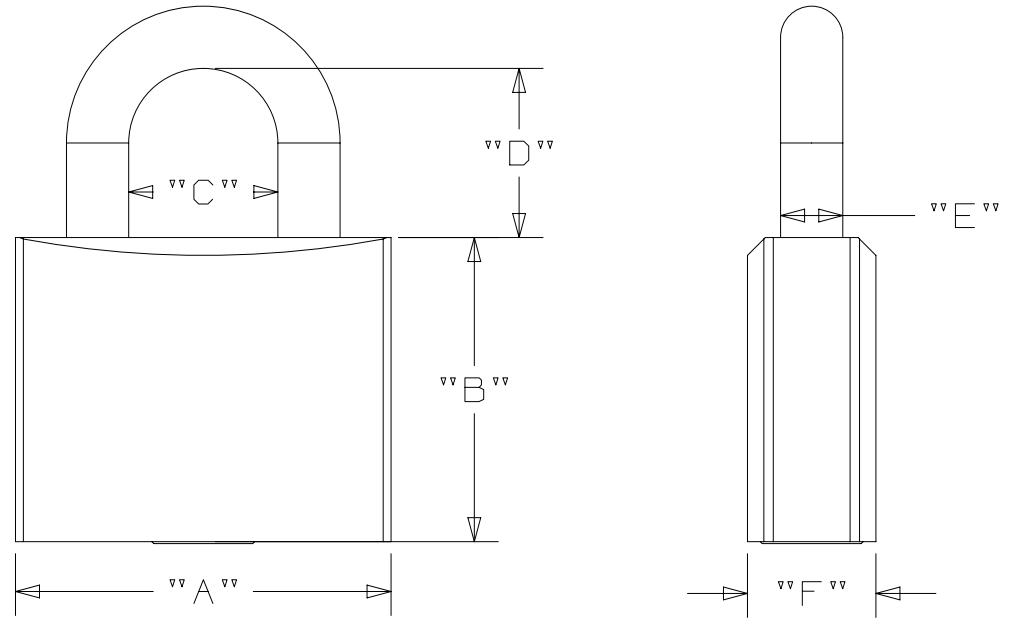

NOTES:

- 1) DIMENSIONS IN [] ARE MILLIMETERS
- 2) 5 PIN CYLINDER
- 3) AVAILABLE WITH CUSTOM KEYING
- 4) SHORT SHACKLE IS STANDARD
ADD "-LS" FOR LONG SHACKLE

	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIM "F"
PSL-13A	0.76 [19.4]	0.76 [19.4]	0.39 [9.9]	0.48 [12.1]	0.11 [2.8]	0.41 [10.5]
PSL-13B	0.96 [24.3]	0.94 [24.0]	0.52 [13.3]	0.56 [14.2]	0.17 [4.3]	0.47 [12.0]
PSL-13C	1.16 [29.5]	1.09 [27.7]	0.72 [18.3]	0.67 [16.9]	0.15 [3.7]	0.51 [13.0]
PSL-13D	1.55 [39.4]	1.25 [31.7]	0.87 [22.1]	0.88 [22.4]	0.26 [6.5]	0.57 [14.6]
PSL-13D-LS	1.55 [39.4]	1.25 [31.7]	0.87 [22.1]	1.60 [40.6]	0.26 [6.5]	0.57 [14.6]
PSL-13E	1.96 [49.7]	1.58 [40.2]	0.78 [19.7]	1.14 [28.9]	0.32 [8.2]	0.67 [17.0]

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
00	02/08/2018	AUMA	DJW	JHAC	Initial Release	GAECN05195	AUMA	1/30/18	JHAC	1:1	SHT 1 OF 1	A

TITLE		PSL-13 Series Corrosion Resistant Padlocks	
ITEM REVISION NAME		00220NCZ/00	
DATASET FILE NAME		00220NCZ_C11715/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .25 [6.35] .xxx ± .05 [1.27]		Aluminum & Steel	
.xx ± .15 [3.81] ANGLES ± 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		C11715	