

т	۵	<b>п</b>	m	0



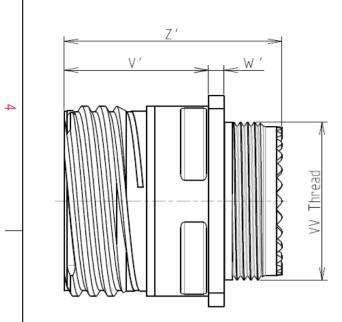



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material		: Composite			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories					
	-Temperature Range	: -65°C to +175°C			

: 2000 hours

8D 0

G

13

J

26

Ν

J

F


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
/V THREAD	M18x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET (1500 Matings)

Е



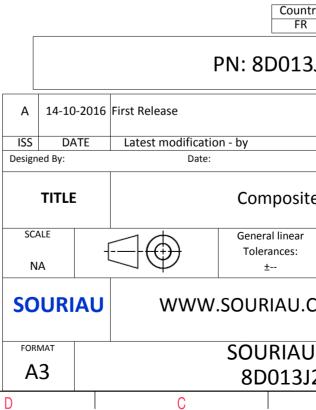

ω				A		
P						4
AS EXAMPLE	Come.					3
any non-cor which does er of the Part adation, tech	not co ies or b nical no Jurisd	mply with by a third pa	arty Introl List			2
					MOD N°	-
site Rece	ptacl	e 8D se	ries 5 / projec <b>859</b>			1
J.COM	communicated without permission					
					SHEET 1/2	
BJ26JN- B	C			A	1/2	J
				-		

_	т	۵	нт.	m	D	0
		Contact Layout				Panel Cutou
4		26			Ň	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		2#12 6#22D	1		¥ ∞ –	
ω	Ctc A B C D E F 1 2	X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 -4.34   3.25 0   -3.25 0				Dim ØA ØA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of
27						(professional recommendati
						PN: 8D013.
_					A 14-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					SCALE	Composite General linear
<u> </u>					NA	Tolerances:
					SOURIAU	
		-	_		FORMAT A3	SOURIAU 8D013J2
	Н	G	F	E	D	C

