


## MAG-MATE

TE Internal #: 63569-1 Magnet Wire Terminals, Pin, Size 2, .23 – .32 mm Magnet Wire, 31 – 28 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE

#### View on TE.com >

Terminals & Splices > Magnet Wire Terminals

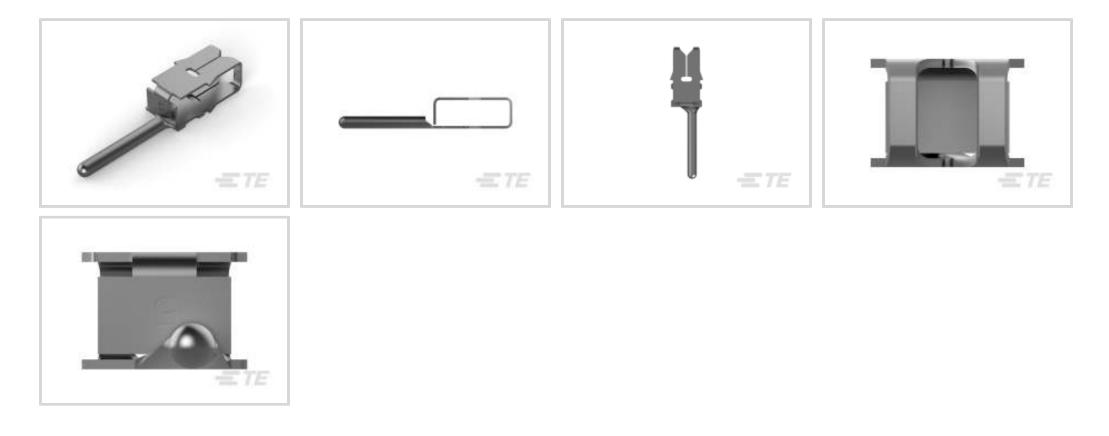

Magnet Wire Terminal Type: **Pin** Mating Pin Diameter: 1.22 mm [.048 in ] Compatible With Cavity Size: Size 2

Magnet Wire Size: .23 – .32 mm

## Features



Product Type Features	
Compatible With Discrete Wire Type	Magnet Wire, Solid
Body Features	
Compatible With Cavity Size	Size 2
Contact Features	
Magnet Wire Terminal Type	Pin
Mating Pin Diameter	1.22 mm[.048 in]
Terminal Plating Material	Tin
Terminal Orientation	Left Hand
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Dimensions	
Terminal Height	7.62 mm[.3 in]
Magnet Wire Size	.23 – .32 mm
Stock Thickness (Magnet Wire Side)	.25 mm[.01 in]

**C** For support call+1 800 522 6752

## 63569-1

Magnet Wire Terminals, Pin, Size 2, .23 – .32 mm Magnet Wire, 31 – 28 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



Product Length	16.76 mm[.66 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-65 – 150 °C[-85 – 302 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Identification Marking	
Identification Number	5
Packaging Features	
Packaging Quantity	12000
Packaging Method	Reel, Reel/Carton
Other	
Terminals & Splices Comment	Two magnet wires may be terminated in the same terminal slot if diameters are equal.

# Product Compliance

For compliance documentation, visit the product page on TE.com>

Compliant
Compliant
No Restricted Materials Above Threshold
Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Not applicable for solder process capability
and represents our current actual knowledge nge. The part numbers that TE has identified as omogenous materials for lead, hexavalent dmium, or qualify for an exemption to these
r

limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

## 63569-1

Magnet Wire Terminals, Pin, Size 2, .23 – .32 mm Magnet Wire, 31 – 28 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



# Also in the Series MAG-MATE



# Customers Also Bought



## 63569-1

Magnet Wire Terminals, Pin, Size 2, .23 – .32 mm Magnet Wire, 31 – 28 AWG Magnet Wire, Insulation Displacement (IDC), Tin Plating, MAG-MATE





## Documents

## Product Drawings MAG-MATE 048 PIN 28-31 010TPBR

English

#### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_63569-1\_M.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_63569-1\_M.3d\_igs.zip

English

Customer View Model

## ENG\_CVM\_CVM\_63569-1\_M.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Magnet Wire Terminals & Splices

English

Product Specifications
Application Specification

English

Product Environmental Compliance Product Compliance

English

Product Compliance

English