

т	۵	п	m	0



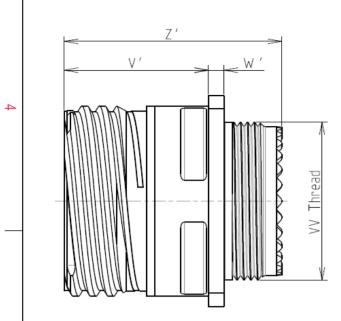

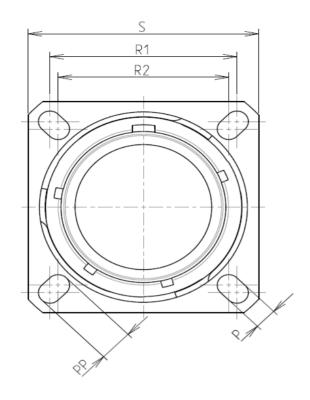

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Ran	ge65°C to +175°C			
-Salt Spray	: 2000 hours			

: 10.4 g ± 10%

8D 0

G

11

J

01

Ρ


F

Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

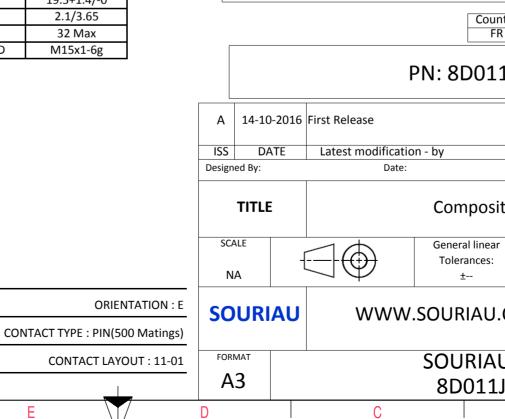

	σ		A		
					4
					3
IS EX4	AMPLE				
s whic er of t	non-conformit ch does not co he Parties or b on, technical n	mply with by a third part	ÿ		
untry FR	Jurisd	liction & Cont Not Listed	rol List		2
L1J(JO1PE				
				MOD N°	
		CUSTOMER	R DRAWING		-
site	e Receptacle 8D series				
ar :			PROJECT 59		1
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	J DRG N° SHEET				
LJU	1PE-C B		A	1/2	J

	Ξ	G	н т	m	D	0
		Contact Layout				Panel Cutout
4		01			1	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		₹1	
ယ	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR PN: 8D011J
	-				A 14-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	General linear Tolerances:
					FORMAT A3	SOURIAU
	Н	G	F	E	D	8D011J0 C

