

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH — BASIC

CATALOG LISTING

V3L-2905

CQ-X1636

REPLACES X101188-V3L

CATALOG LISTING

V3L-2905
PAGE 1 OF 1

M

ISSUE

1

REPLACES

PR-22425

RELEASE NO.

CHECK

CHECK



CHECK

15 NOV 96

DCS

DDM/CAD

DRAWN

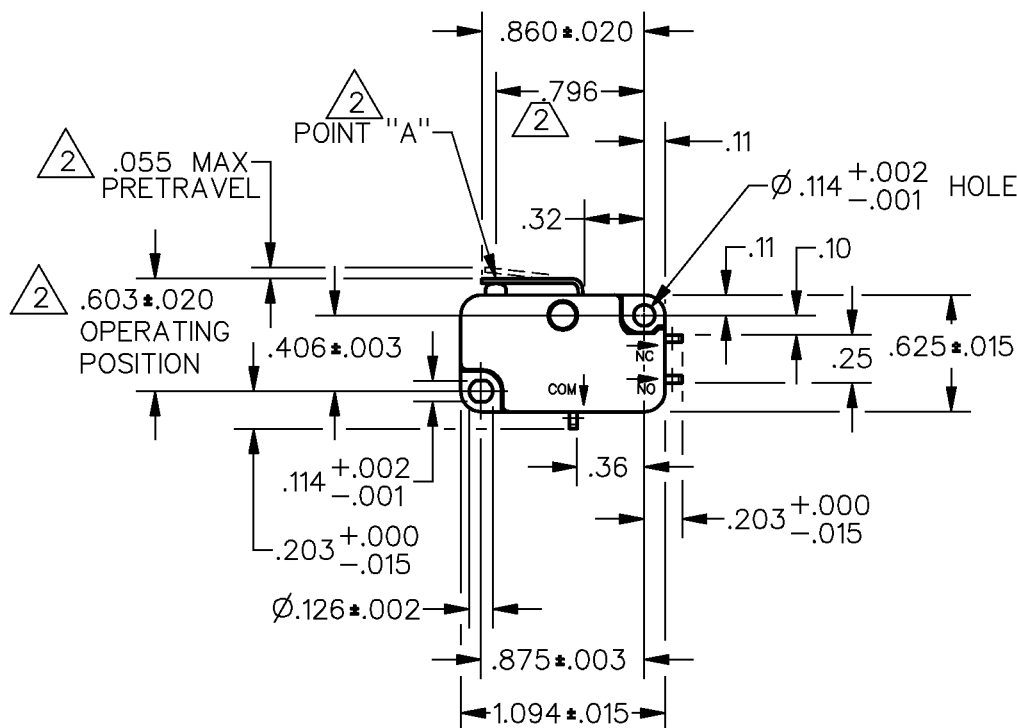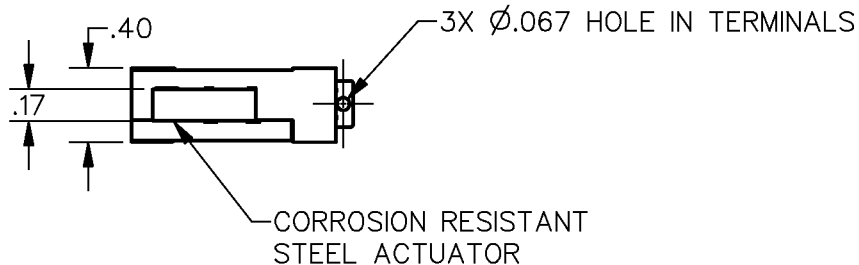

NOTES

1 — TERMINALS ARE SILVER PLATED


2 — CHARACTERISTICS MEASURED AT POINT "A"

3 — MAXIMUM MECHANICAL DEAD BREAK OF .0031 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	2	ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE——271 GRAMS MAX		CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE———24 GRAMS MIN		25A, 277 VAC 1HP, 125 VAC 2HP, 250 VAC 		ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL———.012 MAX				TWO PLACE (.00)	±.015
OVERTRAVEL——— .032 MIN				THREE PLACE (.000)	±.005
RELEASE TRAVEL——— .007 MIN				ANGLES	±
				WEIGHT	

