


Data sheet | Item number: 787-876

Lead-acid AGM battery module; 24 VDC input voltage; 7.5 A output current;
1.2 Ah capacity; with battery control

www.wago.com/787-876

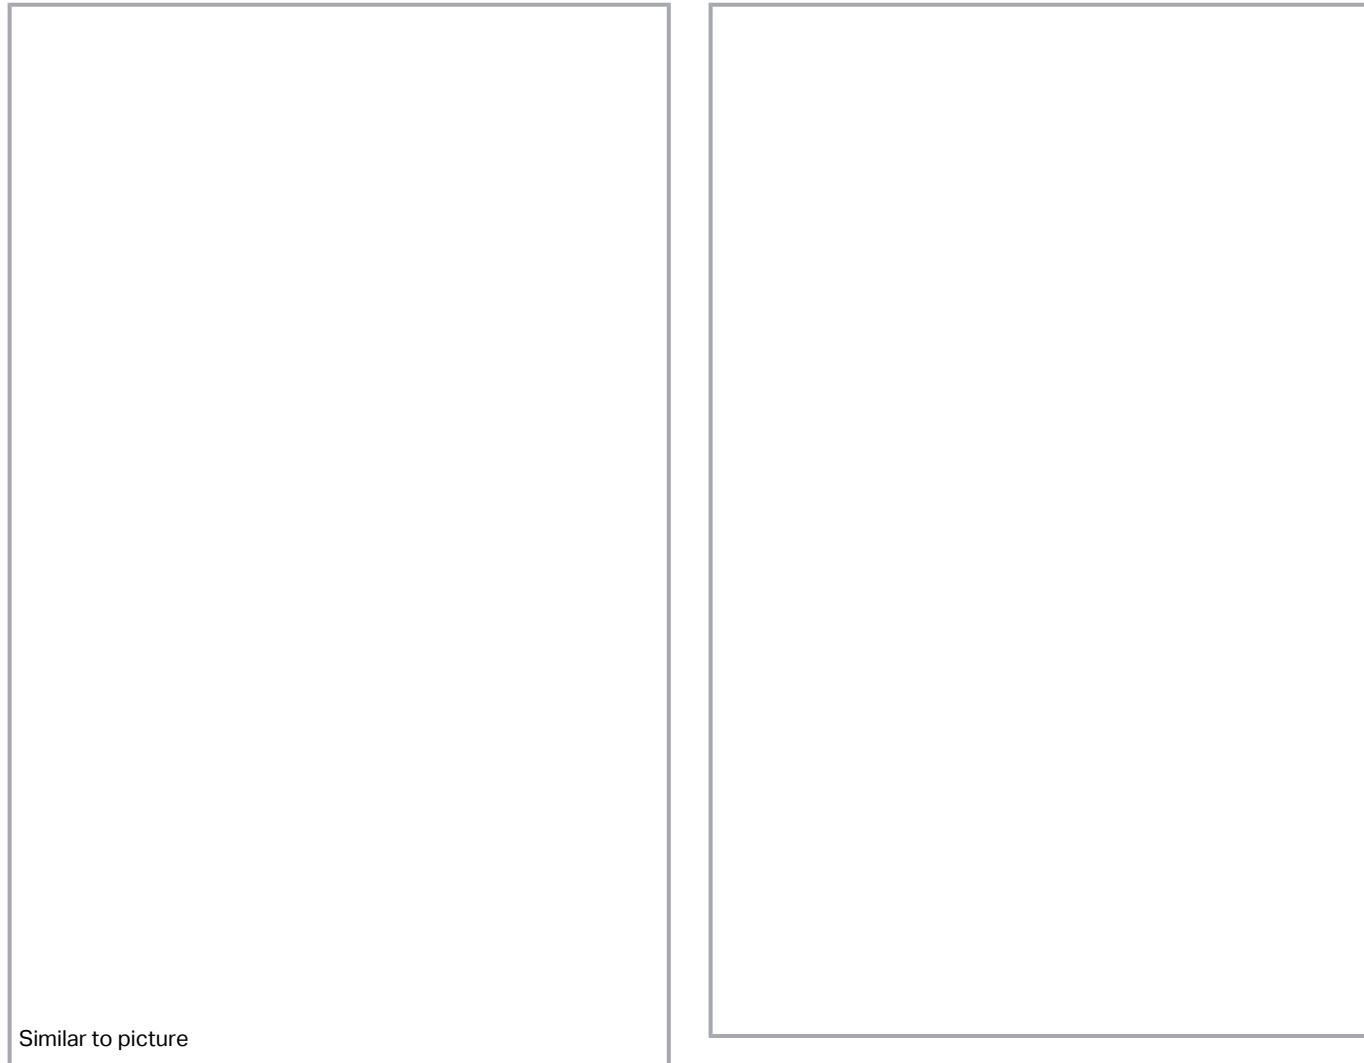

Similar to picture

Item description

Features:

- Lead-acid, absorbed glass mat (AGM) battery module for uninterruptible power supply (UPS)
- Can be connected to both 787-870 UPS Charger and Controller and 787-1675 Power Supply with integrated UPS charger and controller
- Parallel operation provides higher buffer time

—
Subject to changes. Please also observe the further product documentation!

- Built-in temperature sensor
- DIN-35-rail mountable
- Battery control (from manufacturing no. 216570) detects both battery life and battery type

Data Notes

Note

For parallel connection, please switch battery capacity setting to "OFF" in the UPS charger and controller.

Technical data

Input

Nominal input voltage $U_{i\text{ nom}}$	DC 24 V
--	---------

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V
Nominal output current $I_{o\text{ nom}}$	7.5 A

Energy storage systems

Battery capacity	1.2 Ah
Charging current	≤ 0.3 A
End-of-charge voltage	DC 27 V (25 °C)

Signaling and Communication

Signaling

Circuit protection

Internal fuse	T 15 A
---------------	--------

Safety and protection

Protection class	III
Protection type	IP20; per EN 60529

Subject to changes. Please also observe the further product documentation!

Pollution degree	2
Series operation	No
MTBF	> 500,000 h (per IEC 61709)
Service life (typ.)	5 / 4 / 2 a (20 / 30 / 40 °C)

Connection data

Connection type 1	Input/Output/Battery control
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 231 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Cable length (max.)	3 m (Input, Output, Battery Control)

Physical data

Width	55 mm / 2.165 inches
Height	153 mm / 6.024 inches
Depth from upper-edge of DIN-rail	126.6 mm / 4.984 inches
Note (dimensions)	Height with connector

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Material Data

Weight	1980 g
--------	--------

Environmental requirements

Ambient temperature (operation)	-10 ... +40 °C
Ambient temperature (storage)	-20 ... +40 °C
Relative humidity	5 ... 80 % (no condensation permissible)

Standards and specifications

Conformity marking	CE
Standards/specifications	VdS-tested battery UL 508

Subject to changes. Please also observe the further product documentation!

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-05-04-03
eCl@ss 9.0	27-05-04-03
ETIM 8.0	EC000357
ETIM 7.0	EC000357
Recupel Type	
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4050821298243
Customs tariff number	85072080900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	35ab2e59-bacb-4392-9887-576ff84b6de5
SCIP notification number (Belgium)	e4c5e777-34dc-4ce1-8ff5-b0c8c6a29bca
SCIP notification number (Bulgaria)	e7bd2258-d862-47b1-b90f-94af976b385a
SCIP notification number (Czech Republic)	1cadbc50-db83-42ed-9bae-9cafcc51d73f8
SCIP notification number (Denmark)	f08b16c7-5e67-4830-bdc2-847555db677b
SCIP notification number (Finland)	4f9f0273-73f8-4987-9908-fab577177f3f
SCIP notification number (France)	120ad21d-5464-4f71-8b04-64430d335c9c
SCIP notification number (Germany)	72bdfcdf-039a-4903-a04f-647d7a66dbd3
SCIP notification number (Hungary)	3c7304ff-e68d-4940-a26c-031c28a3a9ba
SCIP notification number (Italy)	65f71f76-8ea5-46d5-9032-31844fa05d8f
SCIP notification number (Netherlands)	27b8a7a0-71f4-4953-a258-df1fb592c439
SCIP notification number (Poland)	a39e1dfa-494b-46e3-ab0c-a5f0e54f8fa2
SCIP notification number (Romania)	ebab566d-d028-4149-83d8-c24378ed2007
SCIP notification number (Sweden)	31dbd2a0-4e36-455c-98b1-4241963e568c

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC	TP TC 020/2011	RU_C-DE.

Subject to changes. Please also observe the further product documentation!

Brjansker Zertifizierungsstelle

AM02.B.
00093-19
UL
 Underwriters Laboratories Inc.

UL 508

E255817
UR**Declarations of conformity and manufacturer's declarations**

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories**Power supplies**

Uninterruptible power supply

Item no.: 787-870UPS charger and controller; 24 VDC input voltage; 24 VDC output voltage; 10 A output current;
LineMonitor; communication capability; 2,50 mm²www.wago.com/787-870**Item no.: 787-1675**Switched-mode power supply with integrated charger and controller; Classic; 1-phase; 24 VDC output
voltage; 5 A output current; communication capability; 10,00 mm²www.wago.com/787-1675**Marking accessories**

Marking strip

Item no.: 210-831

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

www.wago.com/210-831**Item no.: 210-832**

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

www.wago.com/210-832**Tool**

Operating tool

Item no.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720**Downloads****Documentation****Bid Text**787-876
docx - Datei

2019 年7月12 日

docx
21.4 kB[Download](#)787-876
X81 - Datei

2019 年7月12 日

xml
5.7 kB[Download](#)

Subject to changes. Please also observe the further product documentation!

ausschreiben.de 787-876

URL

Download

Instruction Leaflet

Bleigel-Akku-Modul

2022 年3月23 日

pdf

Download

DC 24 V, 1,2 Ah

588.5 kB

Additional Information

Disposal and Recycling

V 1.1.0

pdf

Download

Electrical and electronic equipment, Batteries, Packaging

2022 年8月18 日

2.2 MB

CAD/CAE-Data

CAD data

2D/3D Models 787-876

URL

Download

CAE data

EPLAN Data Portal 787-876

URL

Download

WSCAD Universe 787-876

URL

Download

ZUKEN Portal 787-876

URL

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-876

URL

Download

Lead-acid AGM battery module; 24 VDC input voltage; 7.5 A output current; 1.2 Ah capacity; with battery control

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastra. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.