

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A	39014041	MiniFit Jr Rec Hsg SR V-0 4Ckt	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	4	PC
C	--	RESIN BLEND STPRNE	A/R	KG
D	--	MOLD PART INNER CAP	2	PC
E	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	--	4CX16AWG UNSHD BK UL2464	BLACK
A2	--		RED
A3	--		WHITE
A4	--		GREEN

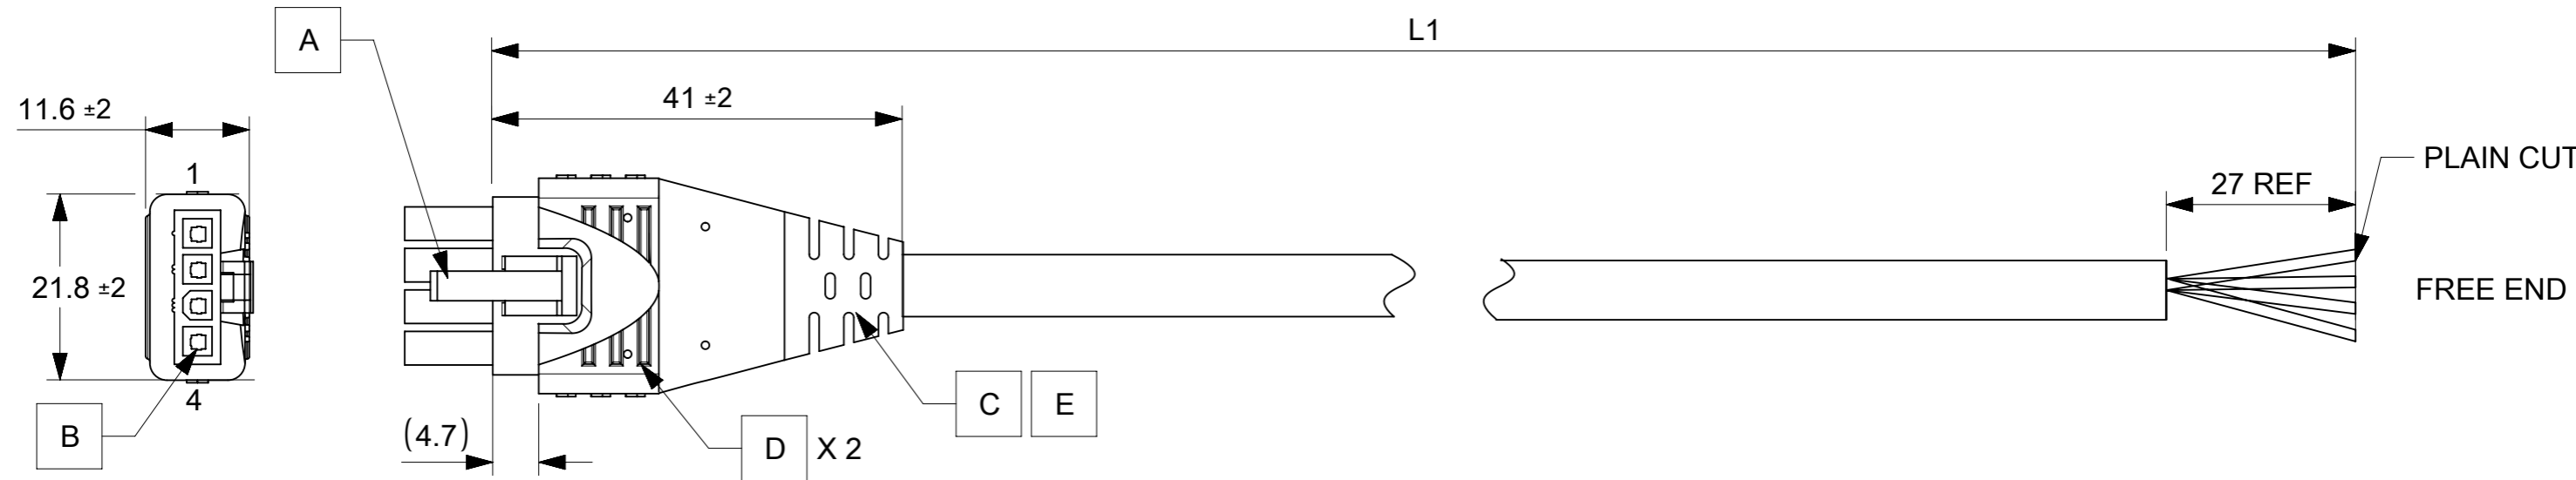


TABLE		
PART NUMBER	TITLE	L1
2171590405	4 CKT OVERMOLD MINIFIT JR PIGTAIL 500MM	500±10
2171590410	4 CKT OVERMOLD MINIFIT JR PIGTAIL 1M	1000±20
2171590420	4 CKT OVERMOLD MINIFIT JR PIGTAIL 2M	2000±25
2171590430	4 CKT OVERMOLD MINIFIT JR PIGTAIL 3M	3000±30

NOTES:

- MOLDING MATERIAL:
 - INNERCAP: PA66 NYLON RESIN.
 - OVERMOLD: SANTOPRENE TPE RESIN.
 - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
 - VOLTAGE RATING: 300V AC.
 - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
 - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
 - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
 - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
 - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_{E'} = 0$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: mm SCALE: NTS CURRENT REV DESC:				
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				EC NO: 740245 DRWN: PRAVES6 CHK'D: SKUMAR07 APPR: SKUMAR07 INITIAL REVISION: DRWN: SBS04 APPR: MNARAYAN01
	DIVISIONAL SYMBOLS DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION DRAWING: A3-SIZE SERIES: 217159	DOCUMENT NUMBER: 2171590405 DOC TYPE: PSD DOC PART: 000 REVISION: C	MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1		