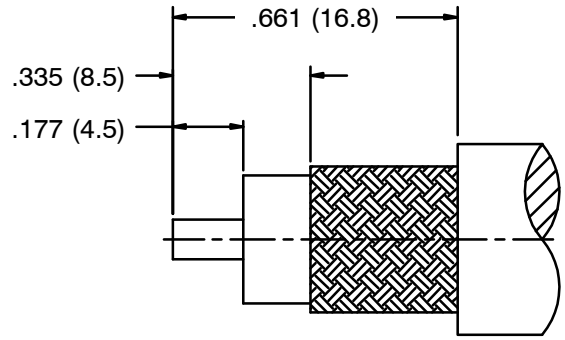

Recommended
Cable Stripping Dim's

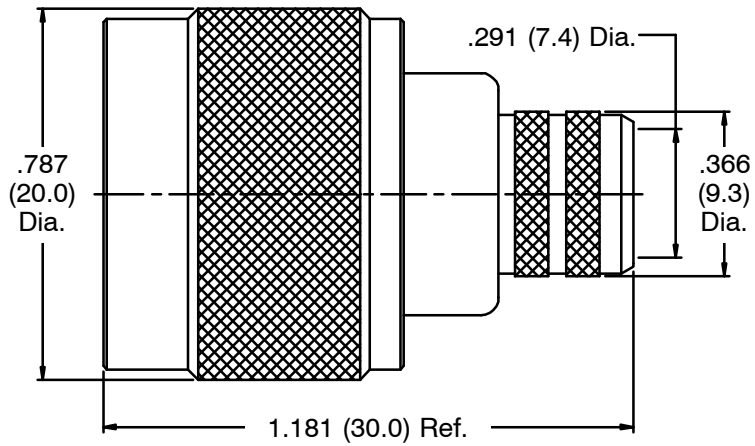

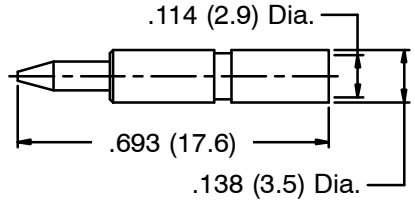

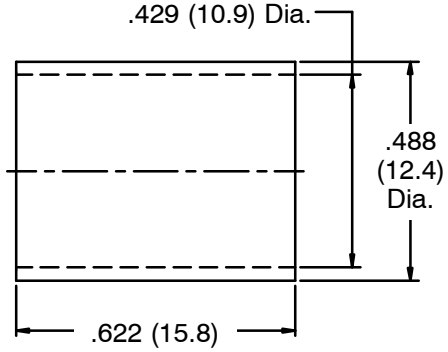

NOTES: Finish (Plating Thickness in Micro–inches)
1. Brass
2. Nickel Pl. 100 Min. Thick over Copper Pl. 50 Min, Thick
3. Gold Pl. 5 Min Thick over Copper Pl. 50 Min. Thick over Copper Pl. 50 Min Thick
4. Teflon
5. Phosphor Bronze

Crimped Ferrule
Hex. Crimp Size .429 (10.9)
Crimped Contact Pin
Hex. Crimp Size .118 (3.0)

RoHS Compliant

No	Description	Material	Finish	Q'ty	Drawing No.
8	Ferrule	Note 1	Note 2	1	
7	Contact Pin	Note 1	Note 3	1	
6	Retainer Ring	Note 5	Natural	1	
5	Gasket	Silicone	Red	1	
4	Insulator	Note 4	Natural	1	
3	Barrel	Note 1	Note 2	1	
2	Body	Note 1	Note 2	1	
1	Shell	Note 1	Note 2	1	

Dimensions are in Inches

Unless Otherwise Specified Tolerances
0.5–6 = ±0.2
6–30 = ±0.4
30–120 = ±0.6
120–315 = ±1
315–1000 = ±1.6
1000–2000 = ±2.4

Scale 2.5/1 | Issue A1

Part No.

Approved | Date 12–2–2010

Checked | Date 12–2–2010

Drawn | Date 12–2–2010

NTE Electronics

Title: N Crimp Plug (For LMR400, Belden 9913 Cable)

Drawing No. 06–N001

File No.