

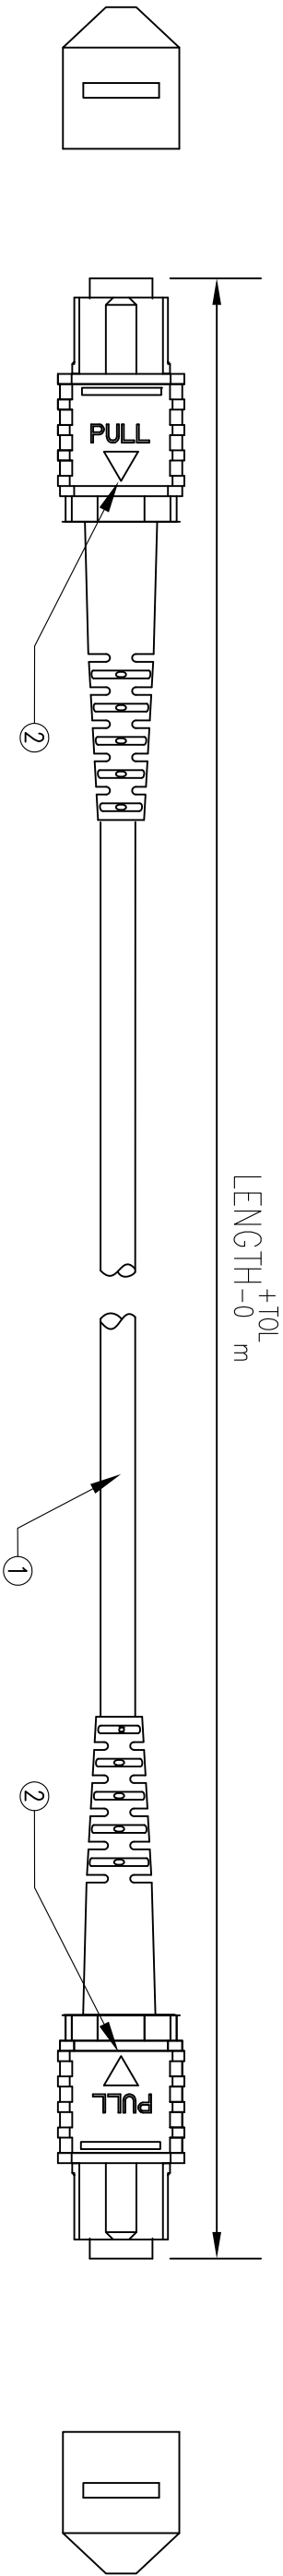


| DATE | REV | ECN | APP'D. BY |
|---------|-----|-------|-----------|
| 7-23-21 | A0 | 11785 | ADB |
| | | | |
| | | | |
| | | | |

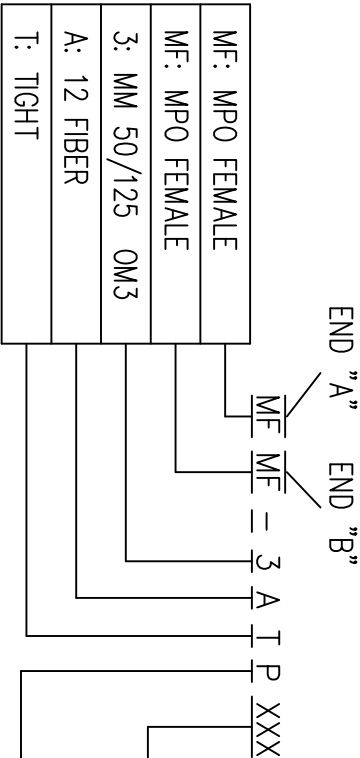

B

B

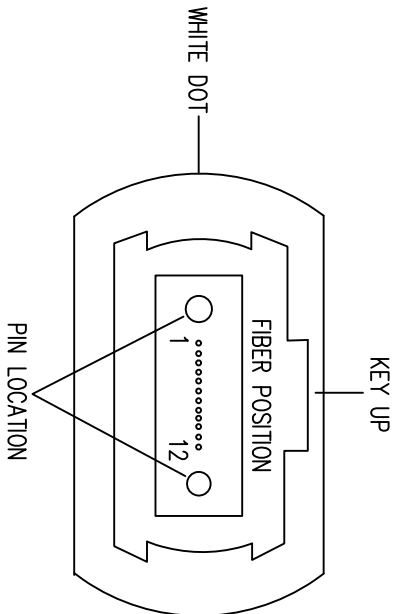

| LENGTH (METERS) | |
|-----------------|--|
| 010 = 1.0 M | |
| 030 = 3.0 M | |
| 050 = 5.0 M | |
| 100 = 10.0 M | |
| P: PVC | |

| LENGTH (M) | TOL. (M) |
|------------|----------|
| 1.0 | 0.12 |
| 3.0 | 0.14 |
| 5.0 | 0.14 |
| 10.0 | 0.16 |

| CONNECTOR PORT 1 POSITION | CONNECTOR PORT 2 POSITION | 250um FIBER COLOR |
|---------------------------|---------------------------|-------------------|
| 1 | 1 | BLUE |
| 2 | 2 | ORANGE |
| 3 | 3 | GREEN |
| 4 | 4 | BROWN |
| 5 | 5 | SLATE |
| 6 | 6 | WHITE |
| 7 | 7 | RED |
| 8 | 8 | BLACK |
| 9 | 9 | YELLOW |
| 10 | 10 | VIOLET |
| 11 | 11 | ROSE |
| 12 | 12 | AQUA |

NOTES

1. INSERTION LOSS REQUIREMENT: ≤0.6dB AT 1300nm

| ITEM NO. | QTY | DESCRIPTION |
|----------|-----|---|
| 1 | A/R | CABLE, OPTICAL FIBER, MULTI-MODE, OM3, 50/125, 12 FIBER ROUND CABLE 3.0mm, TIGHT, AQUA, PVC(OFNR) JACKET. |
| 2 | 2 | CONNECTOR, MPO, FEMALE, MULTI-MODE, AQUA COUPLING BLACK BOOT, BLACK CAP |

A

A

THIRD ANGLE PROJECTION

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: METRIC

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±0.13
ANGLES ARE ± 1°

SHEET NO. 1 OF 2

TITLE: 12 FIBER FEMALE MPO CABLE TYPE A

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

DRN BY: JMM

DATE: 7-21-21

APRD BY: ADB

DATE: 7-23-21

DWG NO. CT999262

REV. A0

