


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3		2		1	
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK	Applicable Tooling		
1	See Table 1	XAF CONNECTOR			BCD		
2	UL10002, 22 AWG	BLACK			TABLE 1		

ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NUMBER	TOTAL WIRE REQUIRED
1	2	02XAF-2S	A02XAF02XAF22K152B	304.8
1	3	03XAF-2S	A03XAF03XAF22K152B	457.2
1	4	04XAF-2S	A04XAF04XAF22K152B	609.6
1	5	05XAF-2S	A05XAF05XAF22K152B	762.0
1	6	06XAF-2S	A06XAF06XAF22K152B	914.4
1	8	08XAF-2S	A08XAF08XAF22K152B	1,219.2
1	10	10XAF-2S	A10XAF10XAF22K152B	1,524.0
1	20	20XAF-2S	A20XAF20XAF22K152B	3,048.0

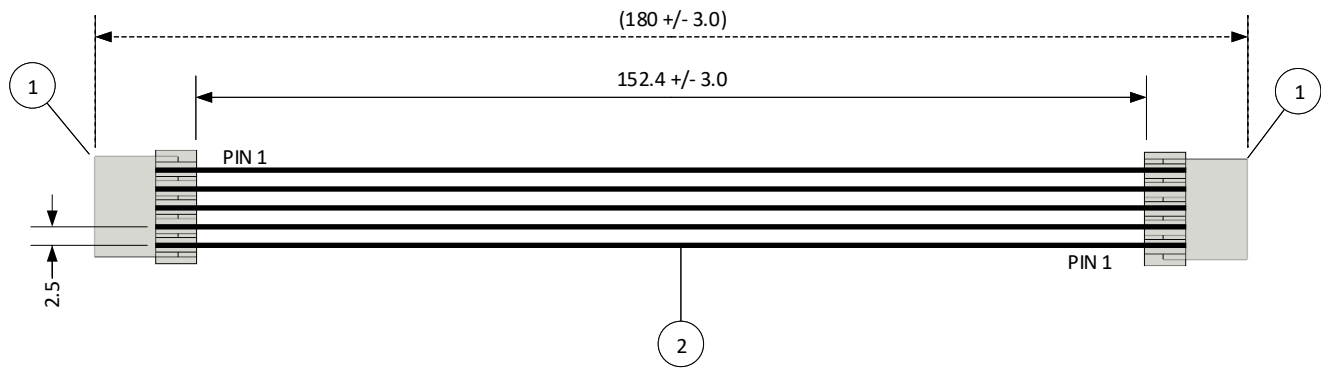

Electrical Specifications	
Current:	3.0A AC/DC
Voltage:	150V AC/DC



SCALE 1:1		CUSTOMER NAME	CUSTOMER PART NO.
DIMENSIONS All dimensions are in MM with a tolerance of ± 3.0 unless otherwise specified.		DESCRIPTION 2.5 mm Pitch XAF Standard Catalog Assembly - 6" Overall Length - Pin out: 1 to N	
DRAWN BY STEVEN PILKINGTON		ASSEMBLY PART NO. SEE TABLE 1	
CHECKED BY JUSTIN BAKER		DRAWING NO. & REVISION GAM-041	REVISED 3/7/2016

1	Add electrical specifications	6/27/2018	SP
REV.	DESCRIPTION	DATE	BY