

4




3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
1		PROPOSAL DESIGN	03AUG2018	WY	SZ
A		REVISED	27JUL2020	WY	SZ

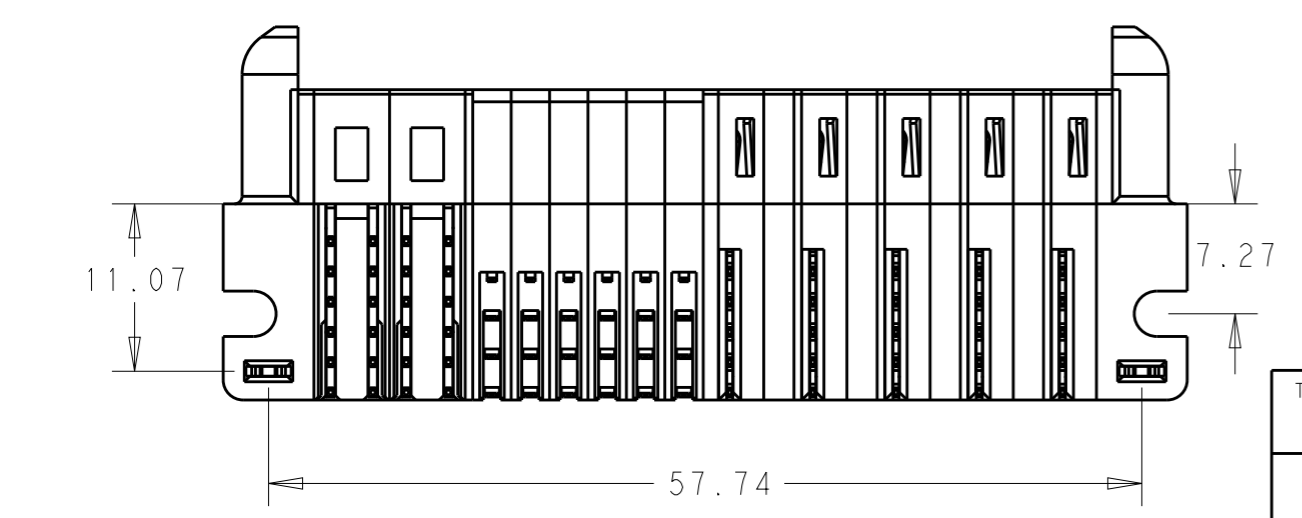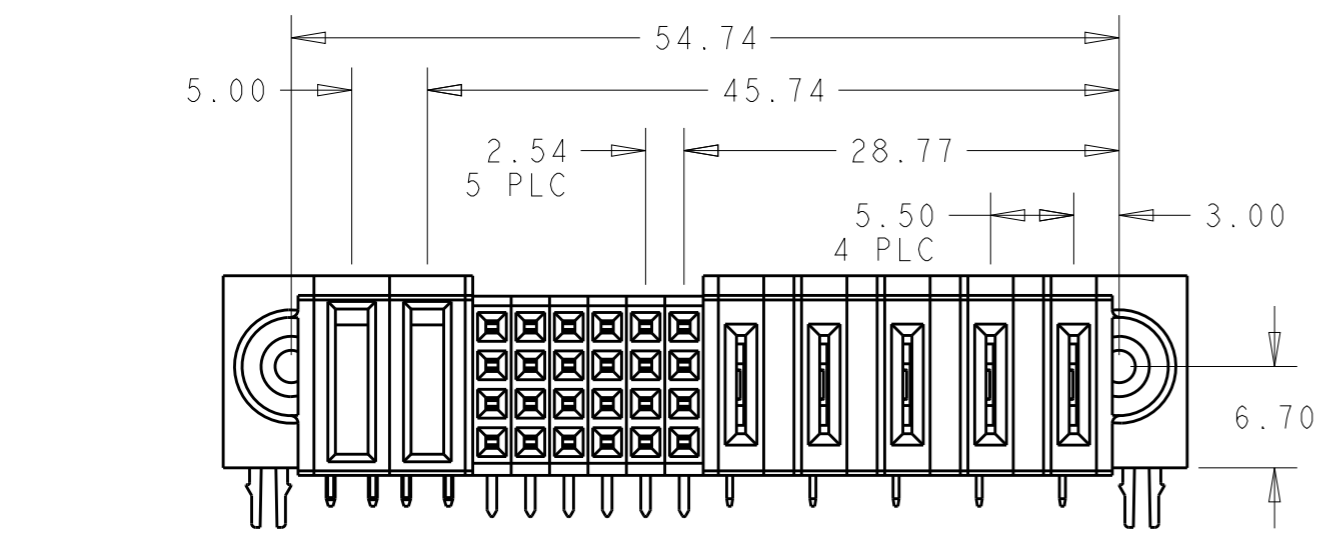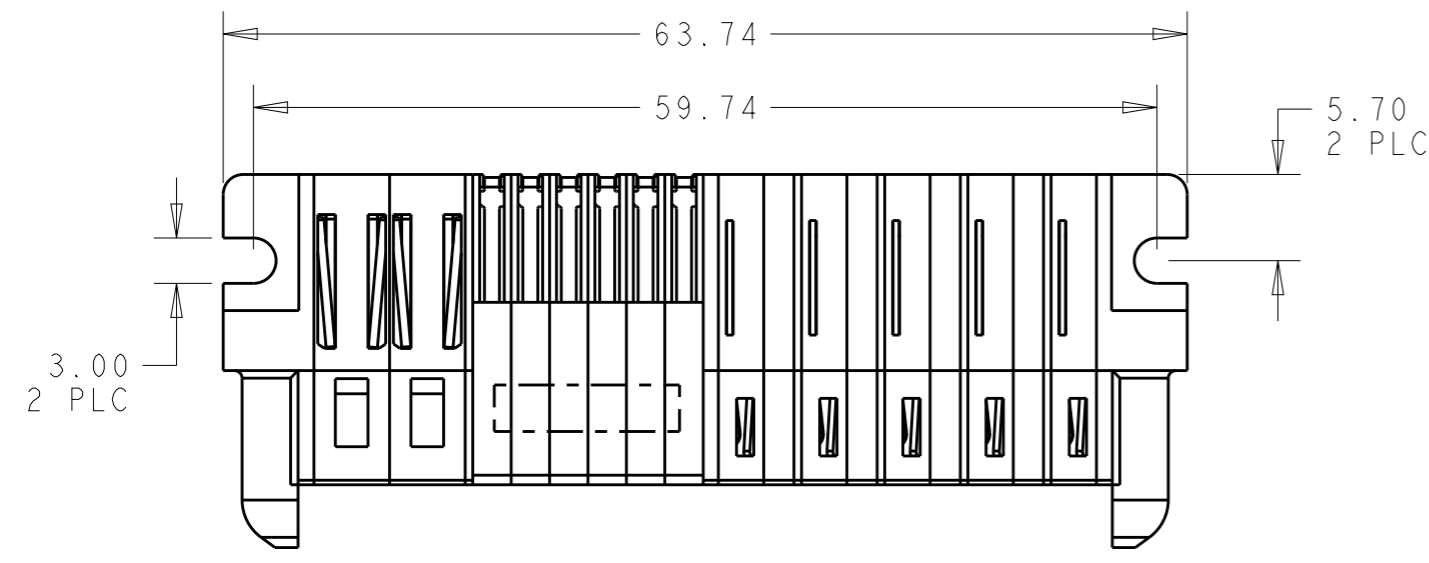

- 1 "TE", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL:  
HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0  
SIGNAL CONTACT - COPPER ALLOY  
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 7 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.003 HOLE.

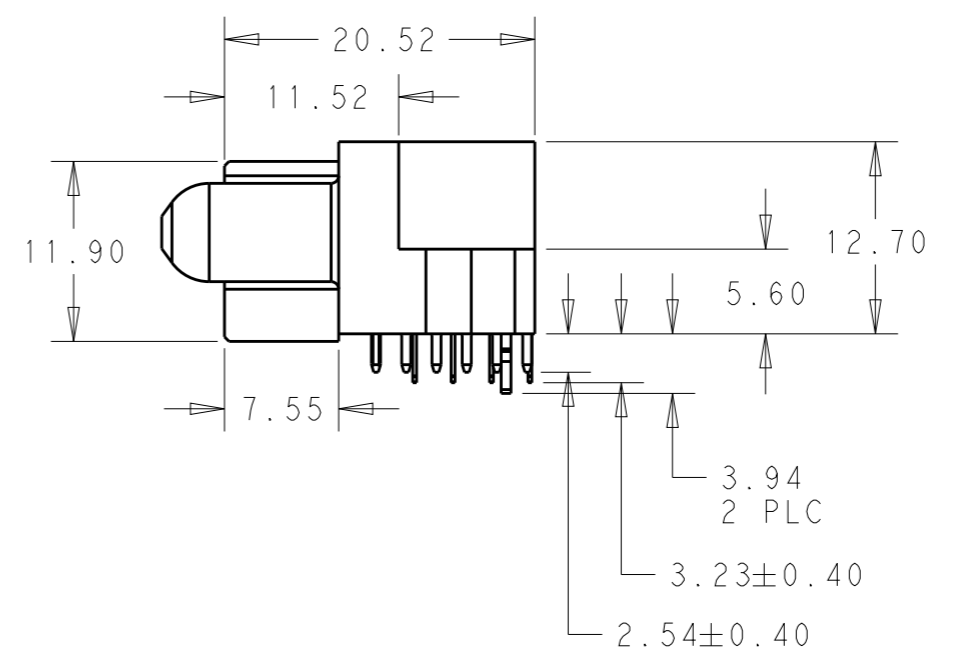


5LP + 24S + 2P	2334570-4
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN WY 03AUG2018	TE Connectivity	
DIMENSIONS: mm		CHK WY 03AUG2018		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SZ 03AUG2018	NAME RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS	
0 PLC ±- 1 PLC ±- 2 PLC ±0.25 3 PLC ±0.15 4 PLC ±- ANGLES ±-		PRODUCT SPEC -	SIZE A300779 CAGE CODE C-2334570-4	
MATERIAL - 2		APPLICATION SPEC -	RESTRICTED TO -	
FINISH - 3		WEIGHT -	SCALE 1:1 SHEET 1 OF 2 REV A	
		CUSTOMER DRAWING		

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

PART NUMBER	ROWS	POWER		SIGNAL						LOW POWER				
		P2	P1	6	5	4	3	2	1	LP5	LP4	LP3	LP2	LP1
2334570-4	E	RNRMRNRM	RNRMRNRM	V4	V4	V4	V4	V4	V4	LM	LM	LM	LM	LM
	D			V3	V3	V3	V3	V3						
	C			V2	V2	V2	V2	V2						
	B			V1	V1	V1	V1	V1						

5LP + 24S + 2P

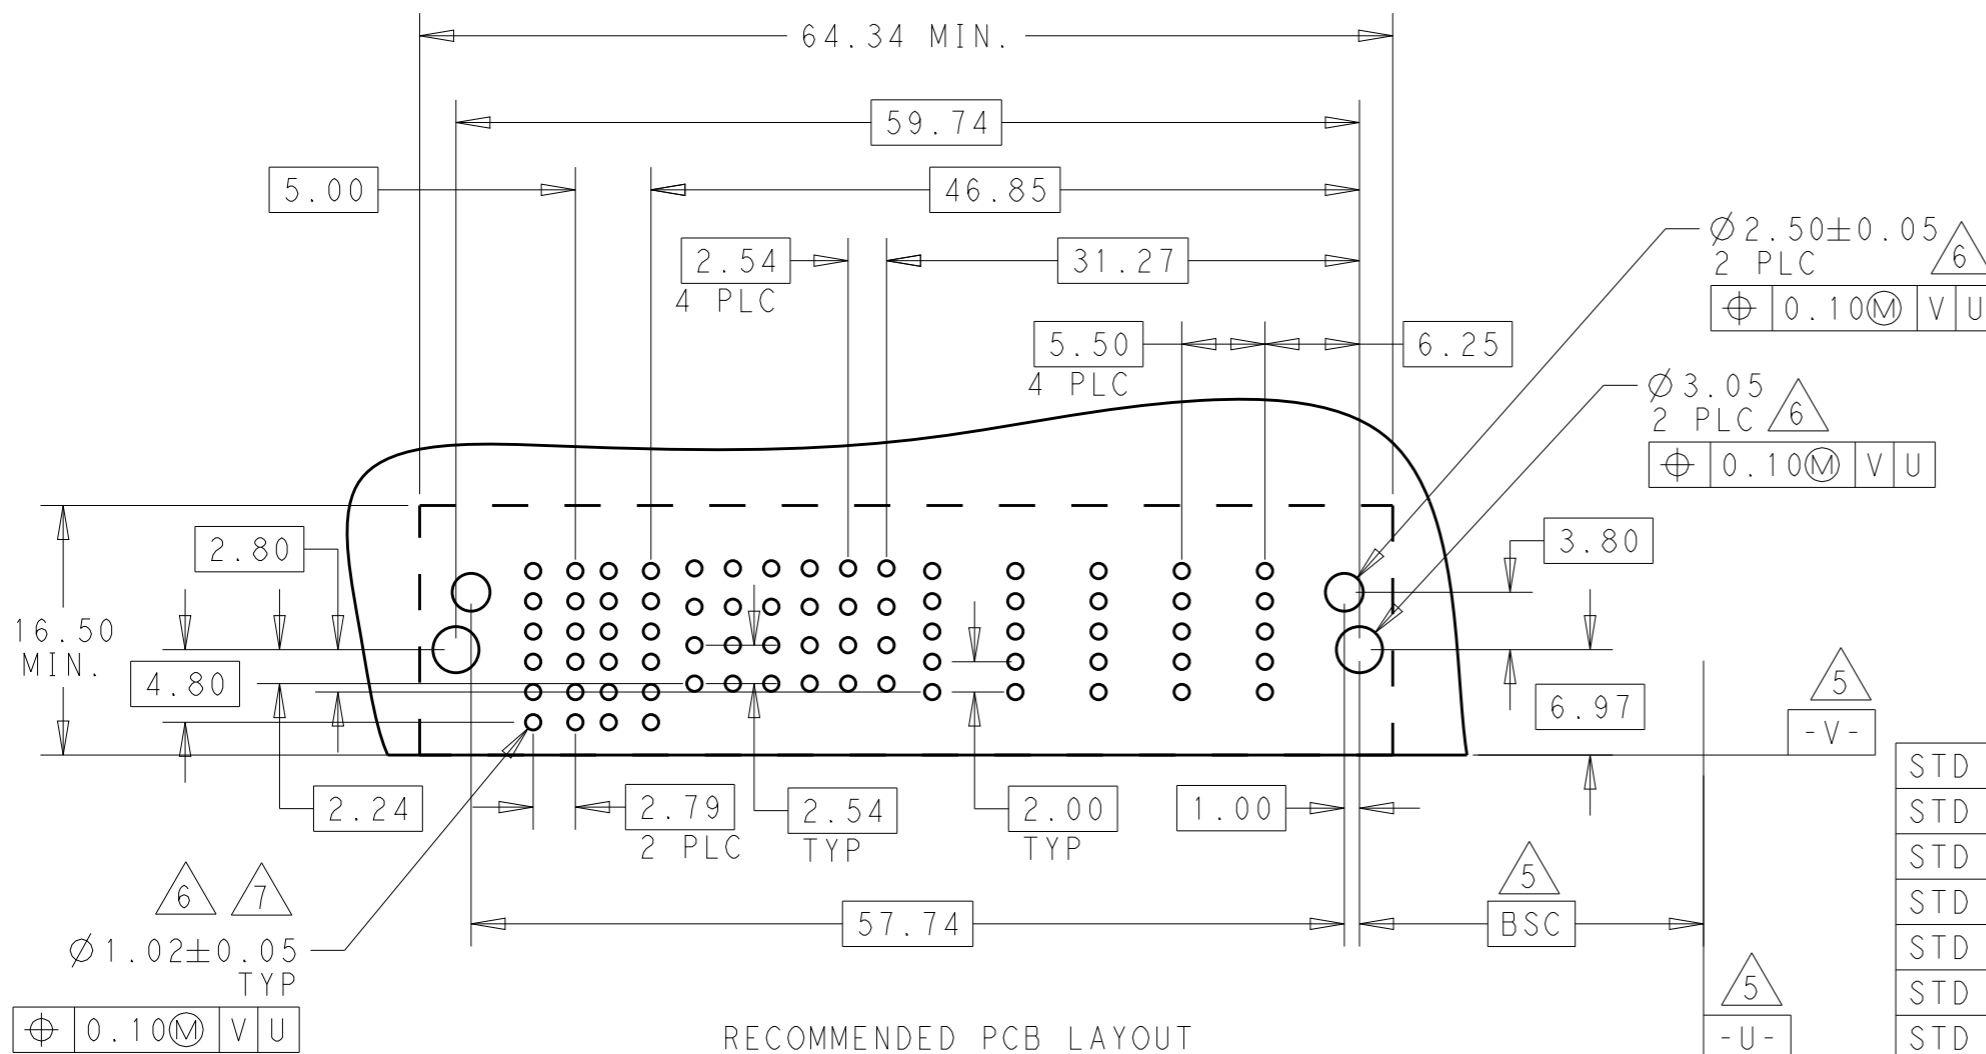

STD SOLDER LOW POWER CONTACT	LM
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW D	V4
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW C	V3
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW B	V2
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW A	V1
STD SOLDER POWER CONTACT, RIGHT	RN
STD SOLDER POWER CONTACT, LEFT	RM
HOUSING	HOUSING
HOLD DOWN, MULTI-BEAM	HD
DESCRIPTION	IDENTIFIER

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±-
	2 PLC ±0.25
	3 PLC ±0.15
	4 PLC ±-
	ANGLES ±-
MATERIAL	FINISH
- 2	- 3

DWN WY	03AUG2018
CHK WY	03AUG2018
APVD SZ	03AUG2018
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

TE Connectivity		NAME	
		RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2334570-4	-
SCALE		SHEET	REV
1:1		2 OF 2	A