

IXA12 Series


Product Feature:

AEC-Q200 Qualified
 IATF 16949 certified production lines
 RoHS and REACH compliant
 Suitable for use in harsh environments

Applications:

Navigation, GPS
 Infotainment System
 Instrument Panel, Ethernet
 ADAS Radar, Camera,
 Engine Control Units
 Lidar Systems TPMS

Frequency	16MHz to 54MHz
Equivalent Series Resistance	200 Ohms Maximum 120 Ohms Maximum 100 Ohms Maximum 60 Ohms Maximum
16MHz – 19.999999MHz 20MHz – 24.999999MHz 25MHz – 39.999999MHz 40MHz – 54MHz	
Shunt Capacitance (C0)	3pF Maximum
Frequency Tolerance (at 25°C)	±50ppm, ±30ppm, ±25ppm, ±20ppm, ±15ppm, or ±10ppm
Frequency Stability (over Temperature)	±100ppm, ±50ppm, ±30ppm, or ±20ppm
Mode of Operation	Fundamental
Crystal Cut	AT Cut
Load Capacitance	8pF to 32pF or Specify
Drive Level	100µWatts Maximum
Aging	±3ppm/Year Maximum
Operating Temperature Range	-40°C to +85°C, -40°C to +105°C, or -40°C to +125°C
Storage Temperature Range	-50°C to +150°C

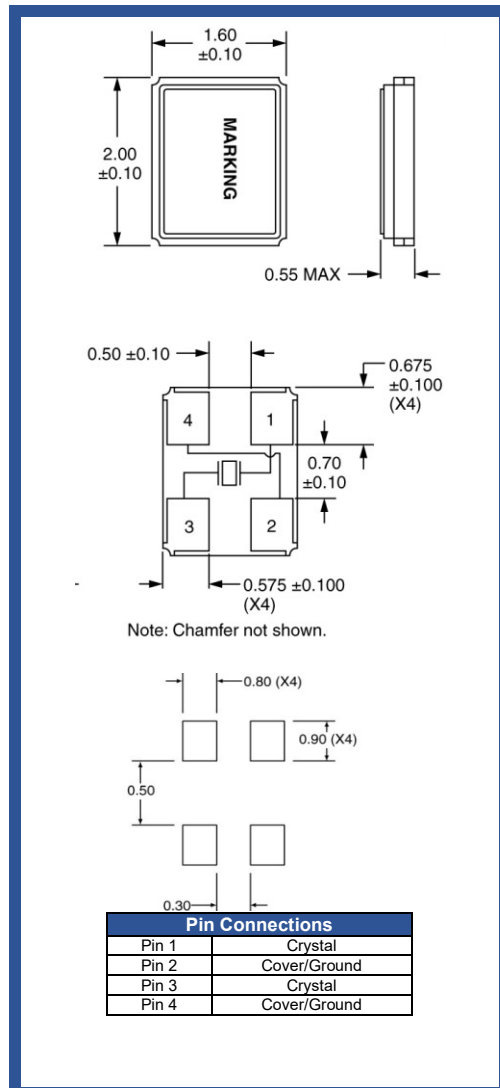


Part Number Guide		Sample Part Number: IXA12-FBDF18- 20.000 MHz				
Package	Tolerance (ppm) at Room Temperature	Stability (ppm) over Operating Temperature	Operating Temperature Range	Mode (overtone)	Load Capacitance (pF)	Frequency
IXA12-	B = ±50 ppm	A = ±100 ppm	5 = -40°C to +85°C	F = Fundamental	8pF to 32pF Or Specify	- 32.000 MHz
	F = ±30 ppm	B = ±50 ppm	D = -40°C to +105°C			
	G = ±25 ppm	F = ±30 ppm*, **	F = -40°C to +125°C			
	H = ±20 ppm	H = ±20 ppm*, ***				
	I = ±15 ppm					
	J = ±10 ppm*					

* Not available at all frequencies.

** Not available for Operating Temperature Range Option F.

*** Not available for Operating Temperature Range Option D or F.

Pb Free Solder Reflow Profile:

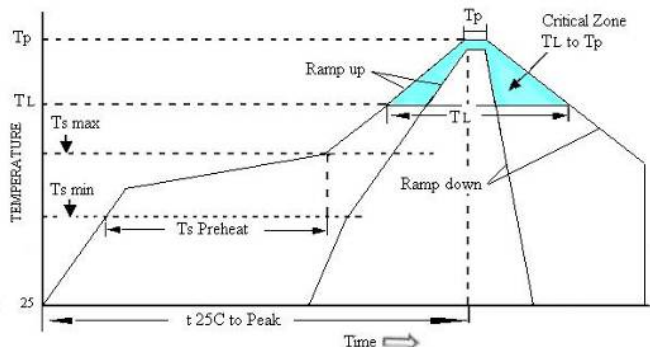



Units are backward compatible with 240C reflow processes

Ts max to T _L (Ramp-up Rate)	3°C / second max
Preheat	
Temperature min (Ts min)	150°C
Temperature typ (Ts typ)	175°C
Temperature max (Ts max)	200°C
Time (Ts)	60 to 180 seconds
Ramp-up Rate (T _L to T _p)	3°C / second max
Time Maintained Above Temperature (T _L)	217°C
Time (T _L)	60 to 150 seconds
Peak Temperature (T _p)	260°C max for 10 seconds
Time within 5°C to Peak Temperature (T _p)	20 to 40 seconds
Ramp-down Rate	6°C / second max
Time 25°C to Peak Temperature	8 minutes max

Package Information:

MSL = 1 (package does not contain plastic; storage life is unlimited under normal room conditions)
Termination = e4 (Au over Ni over W base metal).

Tape and Reel Information:

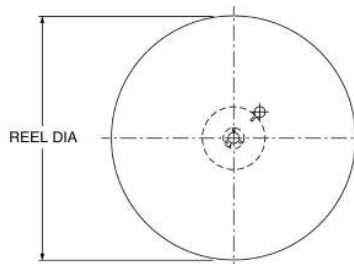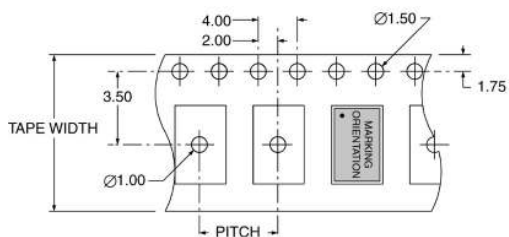

Quantity per Reel	3000
Pitch	4.00
Tape Width	8.00
Reel DIA	180

Environmental Specifications:

Mechanical Shock	MIL-STD-202, Method 213
Vibration	MIL-STD-202, Method 204
Resistance to Soldering Heat	MIL-STD-202, Method 210
Solderability	J-STD-002
Gross Leak	MIL-STD-883, Method 1014, Condition C
Fine Leak	MIL-STD-883, Method 1014, Condition A2