

ECE Series



GREEN XP POWER

- Ultra Compact Size
- Single Outputs from 3.3 to 48 V
- Encapsulated
- PCB & Chassis Mount Versions
- <0.3 W No Load Input Power
- Peak Load Capability
- 3 Year Warranty

Specification

Input

| | |
|-----------------------|---|
| Input Voltage | • 85-264 VAC (120-370 VDC) derate load from 100% at 90 VAC to 90% at 85 VAC |
| Input Frequency | • 47-63 Hz |
| Input Current | • ECE20: 0.3 A rms at 230 VAC ECE40: 0.5 A rms at 230 VAC |
| Inrush Current | • 20 A at 115 VAC, 40 A at 230 VAC, cold start at 25 °C |
| Power Factor | • EN61000-3-2 Class A |
| Earth Leakage Current | • Class II construction no earth |
| No Load Input Power | • <0.3 W |
| Input Protection | • ECE20: Internal T1 A/250 VAC fuse ECE40: Internal T2 A/250 VAC fuse |

Output

| | |
|--------------------------|---|
| Output Voltage | • See tables |
| Initial Set Accuracy | • $\pm 1\%$ |
| Minimum Load | • No minimum load required |
| Start Up Delay | • 2 s max |
| Start Up Rise Time | • 16 ms max |
| Hold Up Time | • 8 ms minimum at full load & 115 VAC |
| Line Regulation | • $\pm 0.5\%$ max |
| Load Regulation | • $\pm 1\%$ max, $\pm 2\%$ max for ECE40US03/05-S |
| Transient Response | • 4% max deviation, recovery to within 1% in 500 μ s for a 25% load change |
| Ripple & Noise | • 3.3-5 V versions: 60 mV pk-pk, 3.3-5 V 'ECE40-S' versions: 75 mV pk-pk (see note 5), all other models 1% pk-pk max 20 MHz bandwidth |
| Overvoltage Protection | • 115-140% Vnom, 195-216% Vnom ECE20US03 / ECE40US03 |
| Overload Protection | • 110-180% |
| Short Circuit Protection | • Trip and restart (hiccup mode) |
| Temperature Coefficient | • 0.05%/°C |

General

| | |
|---------------------|--|
| Efficiency | • See tables |
| Isolation | • 3000 VAC Input to Output |
| Switching Frequency | • 100 kHz typical |
| Power Density | • ECE20: 9.97 W/in ³ ECE40: 7.82 W/in ³ |
| MTBF | • >450 kHrs to MIL-HDBK-217F at 25 °C, GB |

Environmental

| | |
|-----------------------|--|
| Operating Temperature | • -25 °C to +70 °C, derate linearly from 100% at +50 °C to 50% at +70 °C |
| Cooling | • Convection-cooled |
| Operating Humidity | • 95% RH, non-condensing |
| Storage Temperature | • -40 °C to +85 °C |
| Operating Altitude | • 3000 m |
| Vibration | • 2 g, 10 Hz to 500 Hz, 10 mins/cycle, 60 mins each of 3 axes. |

EMC & Safety

| | |
|----------------------|---|
| Emissions | • EN55032, level B conducted & radiated |
| Harmonic Currents | • EN61000-3-2, EN61000-3-3 |
| ESD Immunity | • EN61000-4-2, level 3 Perf Criteria A |
| Radiated Immunity | • EN61000-4-3, 10 V/m 80% mod Perf Criteria A |
| EFT/Burst | • EN61000-4-4, level 3 Perf Criteria A |
| Surge | • EN61000-4-5, installation Class 3, Perf Criteria A |
| Conducted Immunity | • EN61000-4-6, 10 Vrms Perf Criteria A |
| Magnetic Fields | • EN61000-4-8, 10 A/m Perf Criteria A |
| Dips & Interruptions | • EN61000-4-11, 30% for 10 ms, 60% for 100 ms, 100% for 5000 ms Perf Criteria A, B, B |
| Safety Approvals | • IEC60950-1:2005 Ed 2 / IEC62368-1:2014 UL 62368-1 & CAN/CSA C22.2 No. 62368-1-14, EN62368-1:2014/A11:2017 |

Models and Ratings


| Output Power | Output Voltage | Output Current | | Efficiency ⁽⁴⁾ | Model Number |
|--------------|----------------|----------------|---------------------|---------------------------|-----------------------------|
| | | Nominal | Peak ⁽¹⁾ | | |
| 15.0 W | 3.3 VDC | 4.55 A | 5.85 A | 73% | ECE20US03 |
| 20.0 W | 5.0 VDC | 4.00 A | 5.20 A | 77% | ECE20US05 |
| 20.0 W | 9.0 VDC | 2.22 A | 2.89 A | 83% | ECE20US09 |
| 20.0 W | 12.0 VDC | 1.67 A | 2.17 A | 82% | ECE20US12 |
| 20.0 W | 15.0 VDC | 1.33 A | 1.73 A | 83% | ECE20US15 |
| 20.0 W | 24.0 VDC | 0.83 A | 1.08 A | 82% | ECE20US24 |
| 20.0 W | 48.0 VDC | 0.42 A | 0.55 A | 86% | ECE20US48 |
| 33.0 W | 3.3 VDC | 10.00 A | 13.00 A | 73% | ECE40US03 ⁽²⁾⁽³⁾ |
| 40.0 W | 5.0 VDC | 8.00 A | 10.40 A | 77% | ECE40US05 ⁽²⁾⁽³⁾ |
| 40.0 W | 9.0 VDC | 4.44 A | 5.77 A | 80% | ECE40US09 ⁽²⁾⁽³⁾ |
| 40.0 W | 12.0 VDC | 3.33 A | 4.33 A | 84% | ECE40US12 ⁽²⁾⁽³⁾ |
| 40.0 W | 15.0 VDC | 2.67 A | 3.47 A | 84% | ECE40US15 ⁽²⁾⁽³⁾ |
| 40.0 W | 24.0 VDC | 1.67 A | 2.17 A | 85% | ECE40US24 ⁽²⁾⁽³⁾ |
| 40.0 W | 48.0 VDC | 0.83 A | 1.08 A | 86% | ECE40US48 ⁽²⁾⁽³⁾ |

Notes


1. Peak load lasting <30 s with a maximum duty cycle of 10%, average output power not to exceed nominal power.
2. Add suffix -S to model number to denote chassis mount with screw terminal type, e.g. ECE40US12-S. Only available with ECE40 models.
3. A screw terminal versions (-S) is available with DIN Clip attached. Add suffix 'D', e.g. ECE40US24-SD. DIN Rail mounting clip is available as a separate item, order code ECL25/30 DIN CLIP.
4. Average of efficiencies measured at 25%, 50%, 75% & 100% load with 230 VAC input.
5. 3.3 & 5 V ECE40-S versions meet 75 mV pk-pk with 20 MHz bandwidth and 0.1 μF capacitor across output terminals.

Mechanical Details


ECE20

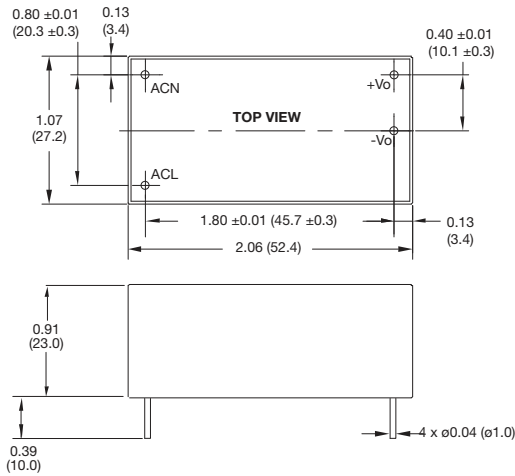

ECE40

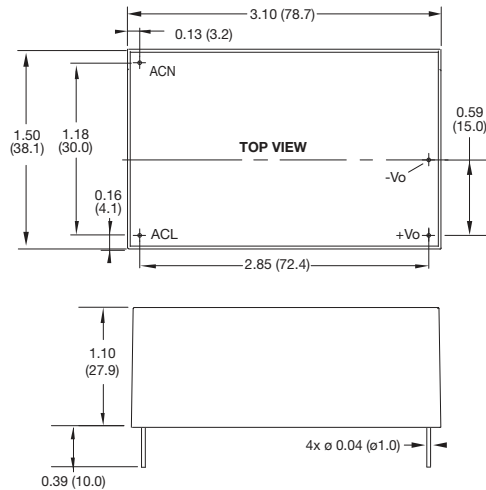

ECE40 Screw Terminal (-S)

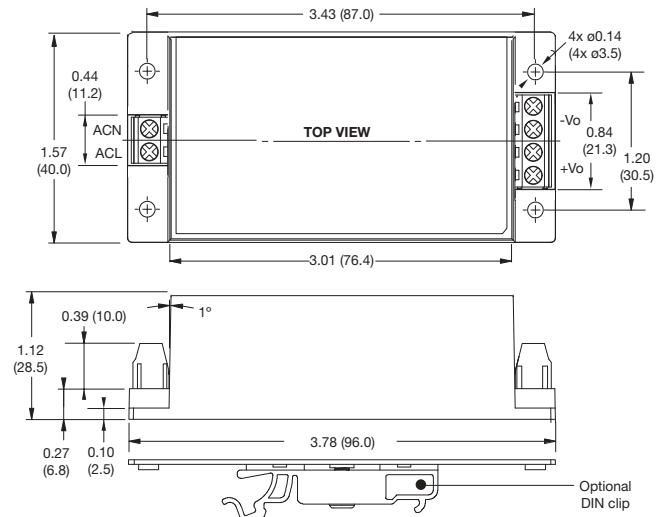

Notes

1. All dimensions in inches (mm).
2. Weight: ECE20: 0.13 lbs (60 g)
ECE40: 0.33 lbs (150 g)
ECE40 Optional Screw Terminal: 0.37 lbs (170 g)
3. Tolerances: x.xx = ± 0.02 (x.x = ± 0.5), x.xxx = ± 0.01 (x.xx = ± 0.25)