


Unit: mm

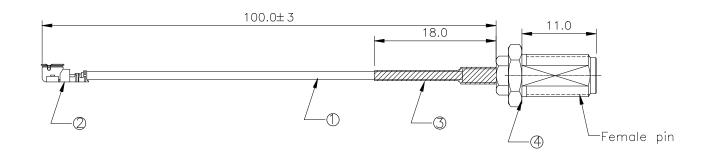

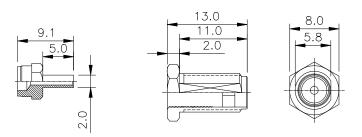

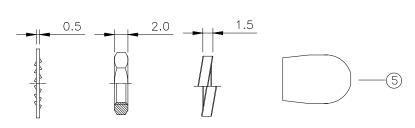

LOCK WASHER HEX NUT SPRING WASHER RED HAT

Note: parts in bulk, 100SET/bag

ELECTRICAR CHARACTERISTICS REQUIREMENTS:

1.Product must be 100% conductionr, open circuit short circuit test.

2.Conductive resistance: 20Ω

3.Rated voltage: AC 60V

4. Withstand voltage: AC 200V

5.Insulation resistance:500m Ω

6.characteristic impedance: 50Ω

7.Adopt environmental protection process and meet ROHS requirements

8. Tensile test: 1.5kg~

9. The general tolerance shall prevail if no tolerance is noted

			Ro	HS (Compliant	
COVER	_	RED HAT PACKING SMA		1	_	

5	COVER	_	RED HAT PACKING SMA	1	_		
4	SMA FEMALE	_	11*1.78-ZYK-OPENING WELDING GOLD PLATING	1	_		
3	HEAT SHRINK SLEEVE	_	2.0*18MM BLACK HEAT SHEINK SLEEVE	1	_		
2	IPEX-1.37 CONN	_	IPEX-1.13 BRASS GOLD	1	_		
1	COAXIAL CABLE	_	RG1.37 GRAY-48-TIN-FEP JACKET L=105mm	1	105		
ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL		
	MATERIAL SPECIFICATION W						

3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCR	IPTION	瀚荃股份有限公司 CviLux Corporation		CUST. CODE
2			Lulu	Iron	Iron	Waleed	RF CABLE	$\oplus \Box$			CUC
\triangle			LuLu 08/21.20'			08/21.20'	INI CADEL	$\Psi \cup$	DRAWING No.	CviLux P/N	CUSTOMER P/N
SYM NA	ame date	REVISIONS		08/21.20'			SHEET: 1	OF 1	DH50627A	DH-20G50013	_