




SINGLE CONTACT DIMENSIONS

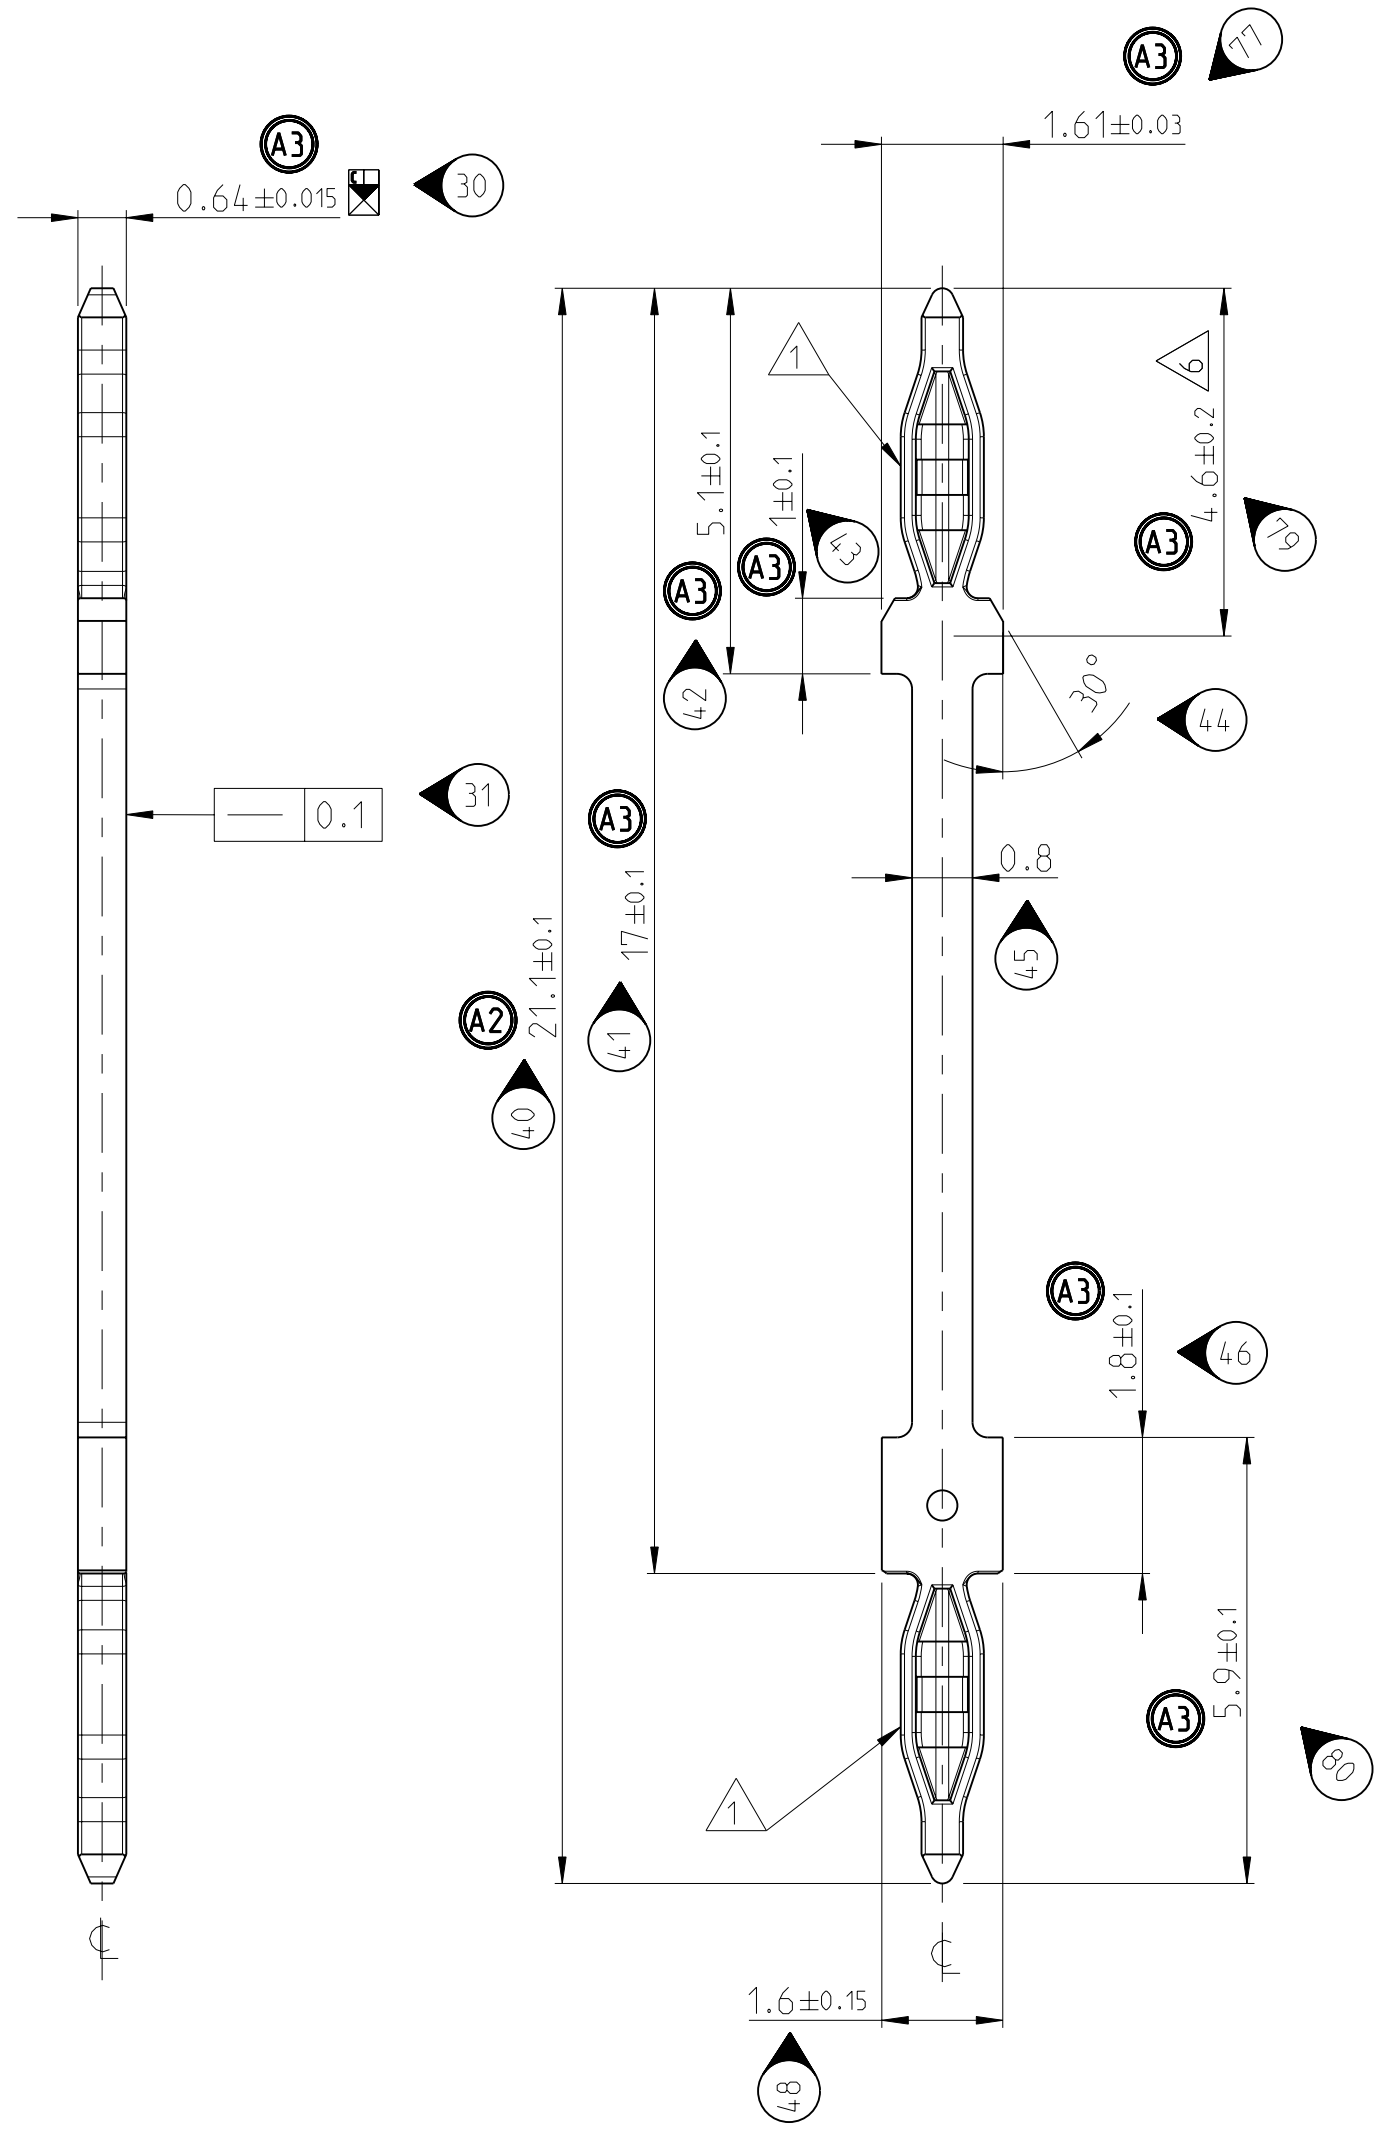




SINGLE CONTACT AFTER BENDING

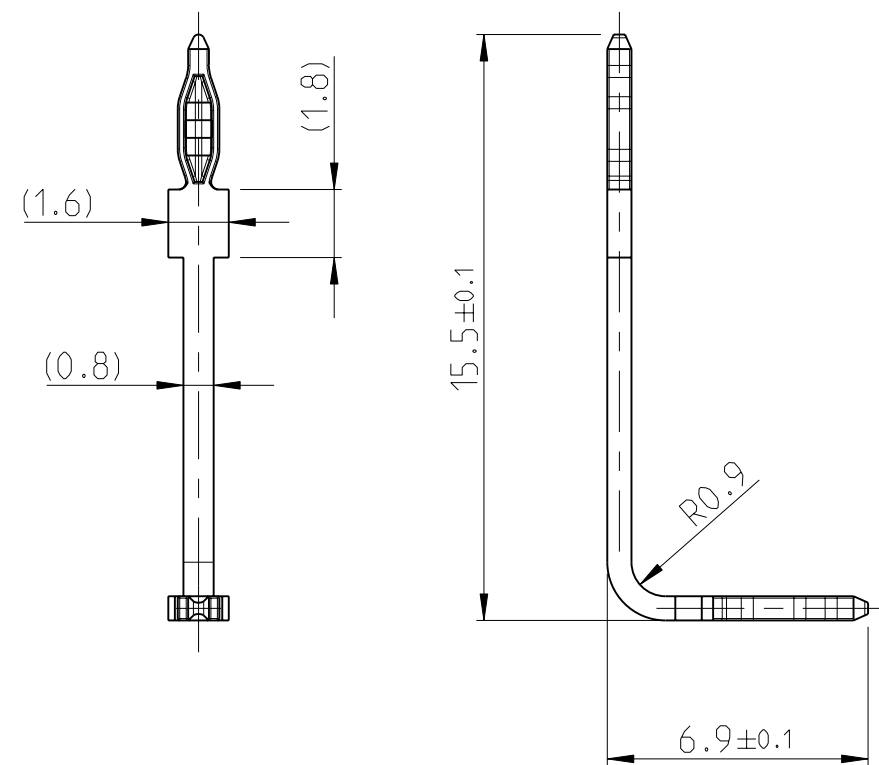

APPLICATION SKETCH
Einbausituation

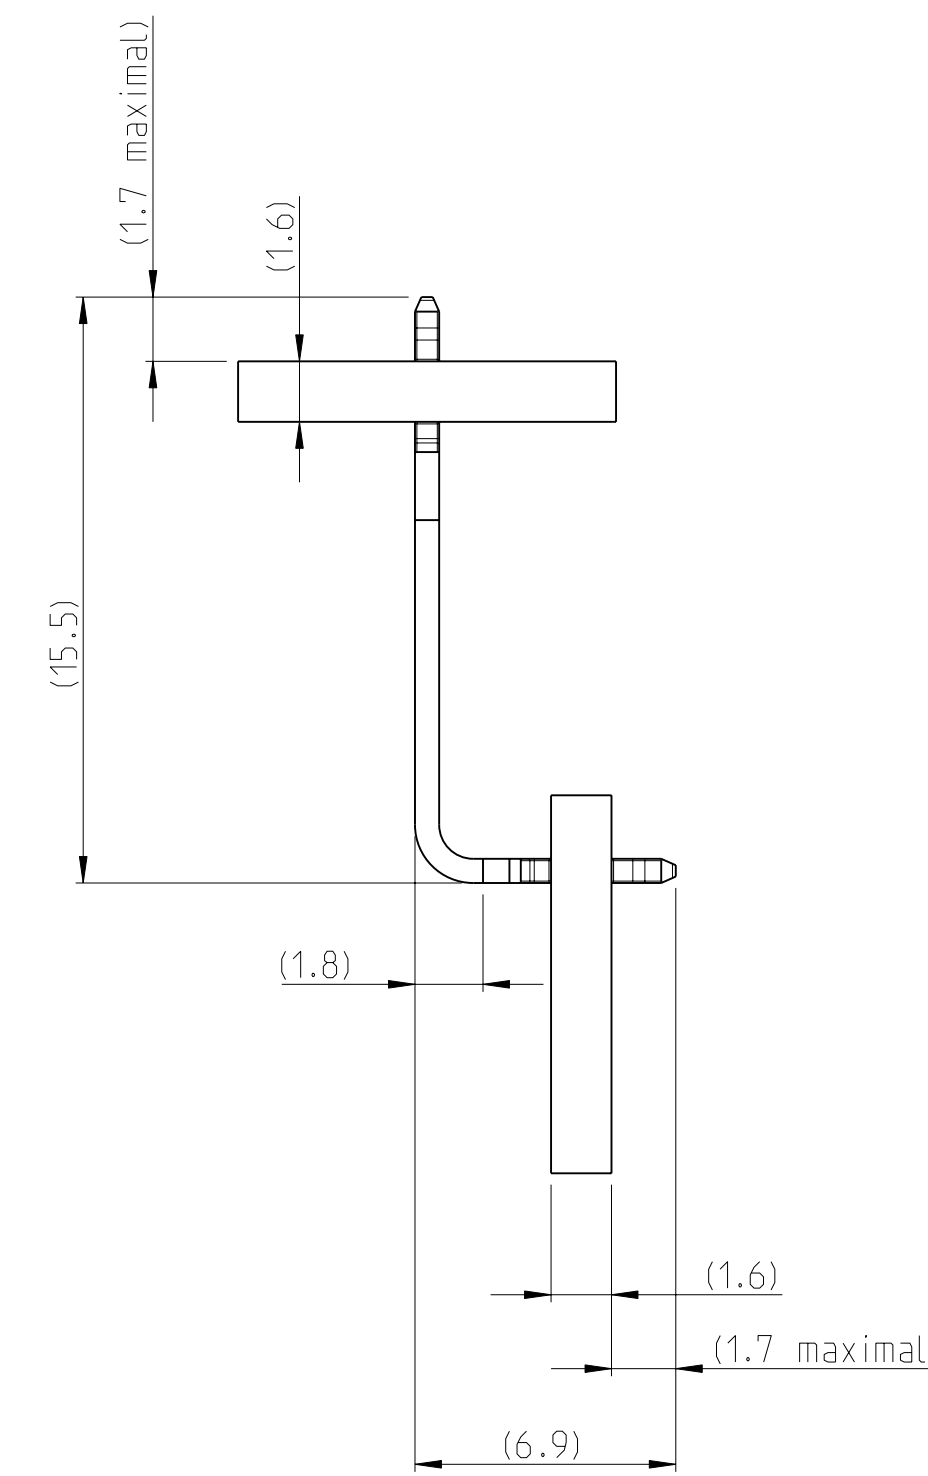

DELIVERY STATUS
Anlieferungszustand PPN 0-2141016-2

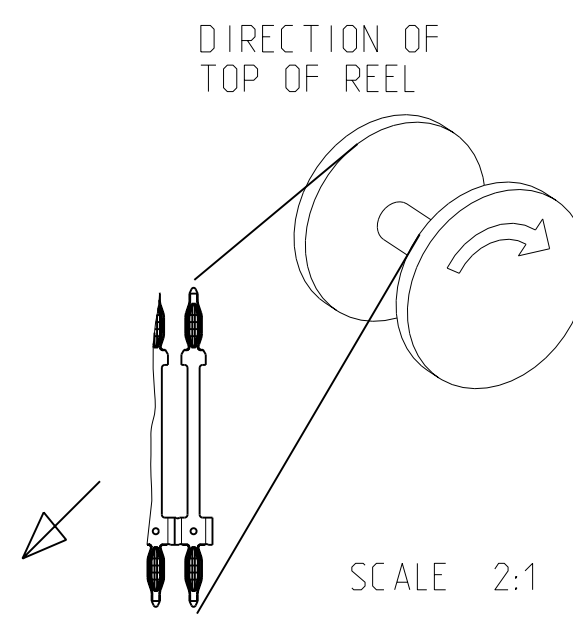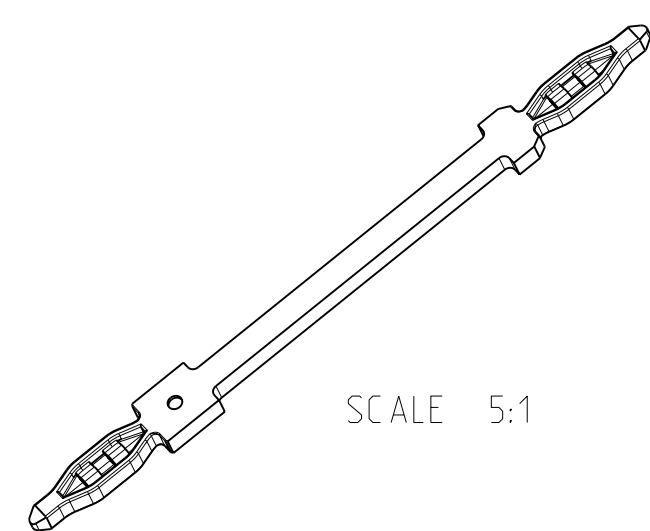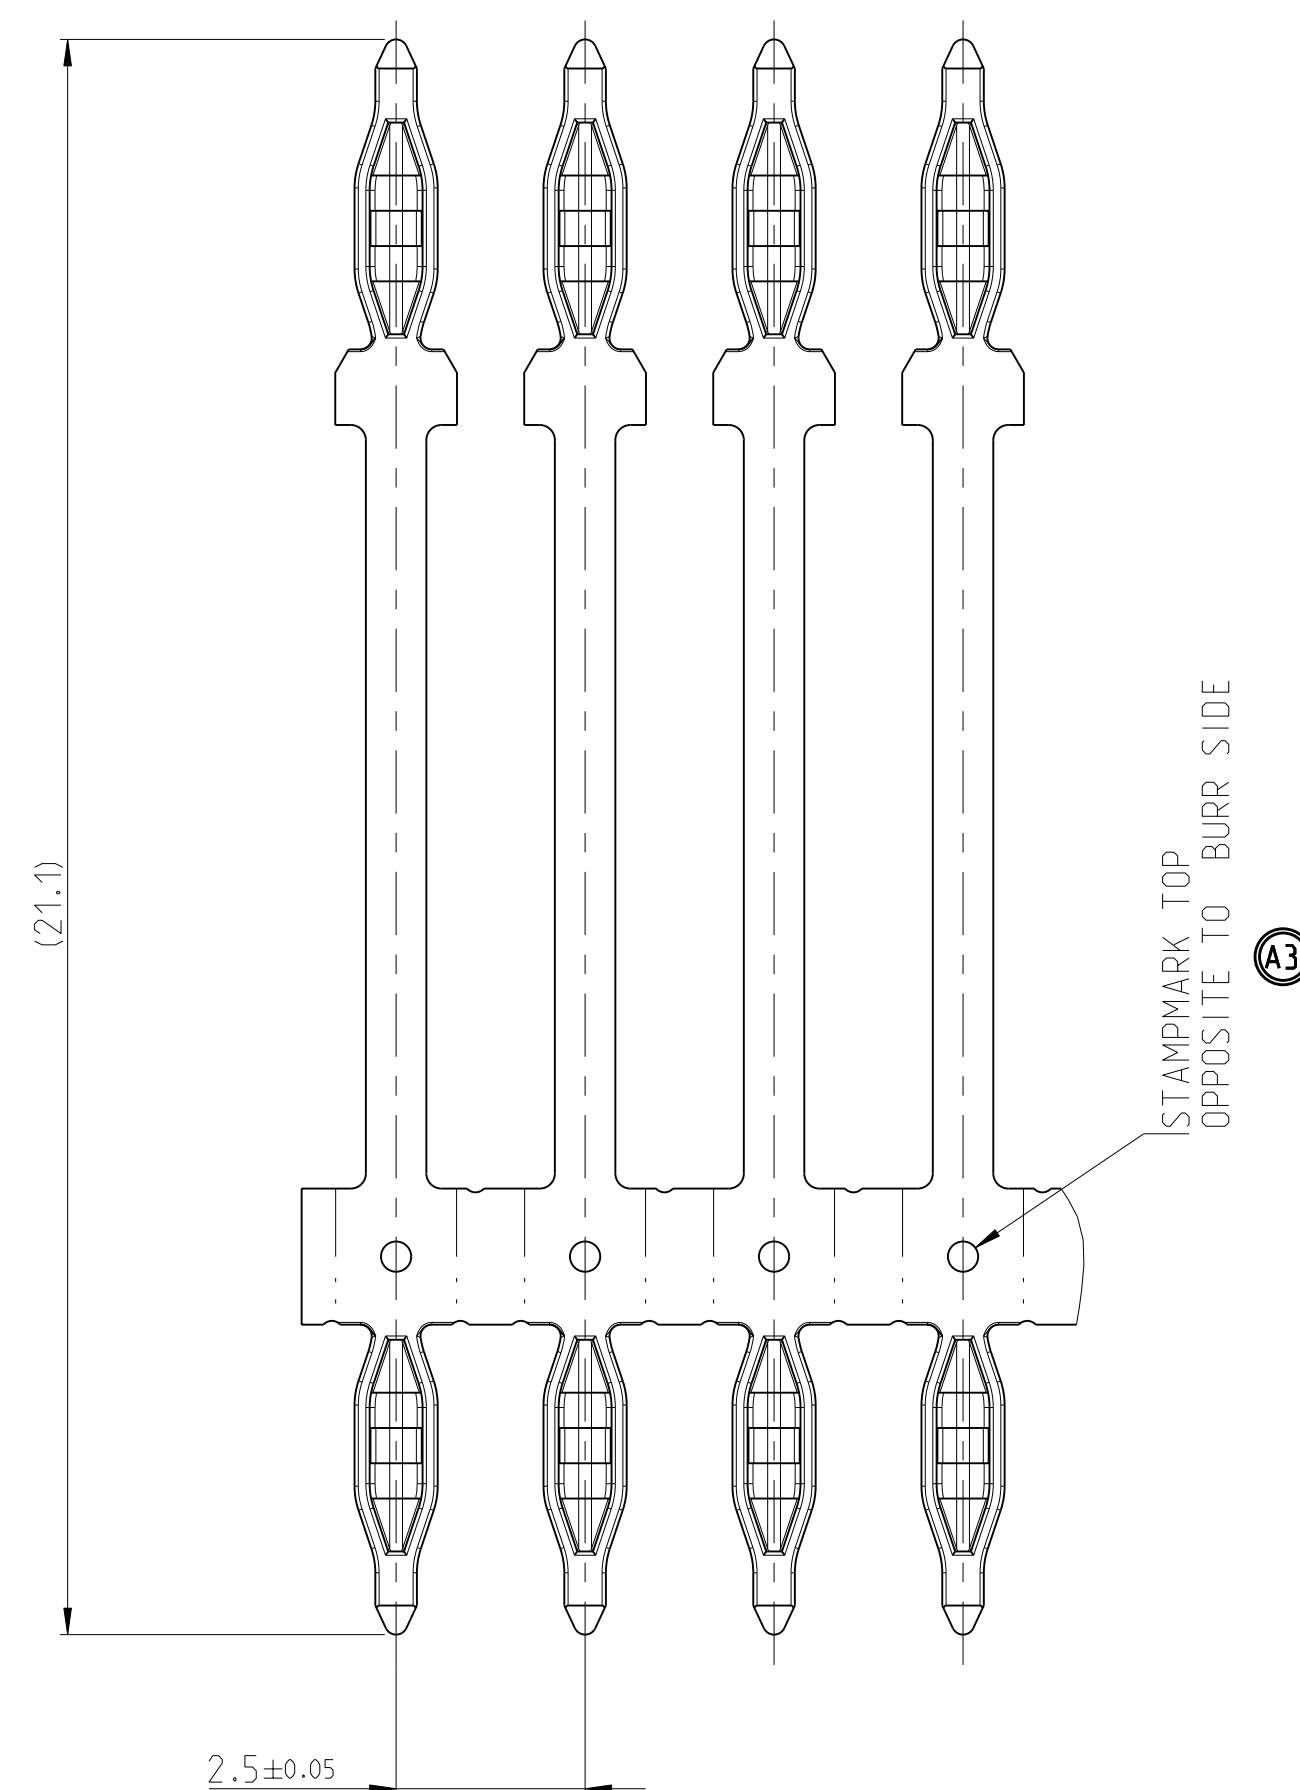

| LOC | DIST | REVISIONS | | | |
|-----|------|-----------------|-------------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| A1 | - | | | | |
| A2 | | DIM 21.1 | 10 JUN 2010 | TS | BF |
| A3 | | PCN E-10-022168 | 27 OCT 2010 | HS | BF |

NOTE:
Bemerkung:

- 1 PART ACCORDING TE- SPECIFICATION 108-90800
Teile nach TE- Spezifikation 108-90800
- 2 MATERIAL: CuSn6
Material: CuSn6
- 3 PLATING: 0.3-1.8 µm Sn OVER 0.7-1.5 µm Ni
Oberflaeche: 0.3-1.8 µm Sn ueber 0.7-1.5 µm Ni
- 4 PACKAGING: 50.000 CONTACTS/REEL (PAPERBOARD REEL)
Verpackung: 50.000 Kontakte/Spule (Pappspule)
- 5 MAX SPLICINGS PER REEL: 3 SPLICES/REEL
Maximale Anzahl an Reel-Verbindungen: 3 Verbindungen pro Spule
- 6 MEASURING POINT FOR DIMENSION OF MATERIAL THICKNESS
Messpunkt für Dickenmessung

| | | | |
|--|--|---|---|
| <small>THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2009 BY TYCO ELECTRONICS CORPORATION, ALL INTERNATIONAL RIGHTS RESERVED.</small> | | DWN: T.Starke 05FEB2010 CHK: B.Fiebertling 05FEB2010 | Tyco Electronics AMP GmbH 64625 Bensheim (Germany) |
| DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.1 3 PLC ± 4 PLC ± ANGLES ± FINISH - | | PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: 0.1g CUSTOMER DRAW ING | NAME: 0.63 MQS MULTISPRING PIN CONTACT ON REEL SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=2141016 SHEET: 1 OF 1 REV: A3 |