



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	54-00096	Connector, 4 pin M5 plug, 5xL13mm, gold plated, panel mount, solder cup, IP67	1	nut and o-ring included
2	Wire	Wire, hook-up, TS, 26 AWG, UL 11028, 600V, 105C, 1 mm, mPPE	4	color: red, black, green, white
3	Heat shrink	Heat shrink, UL, black	4	covers solder joints

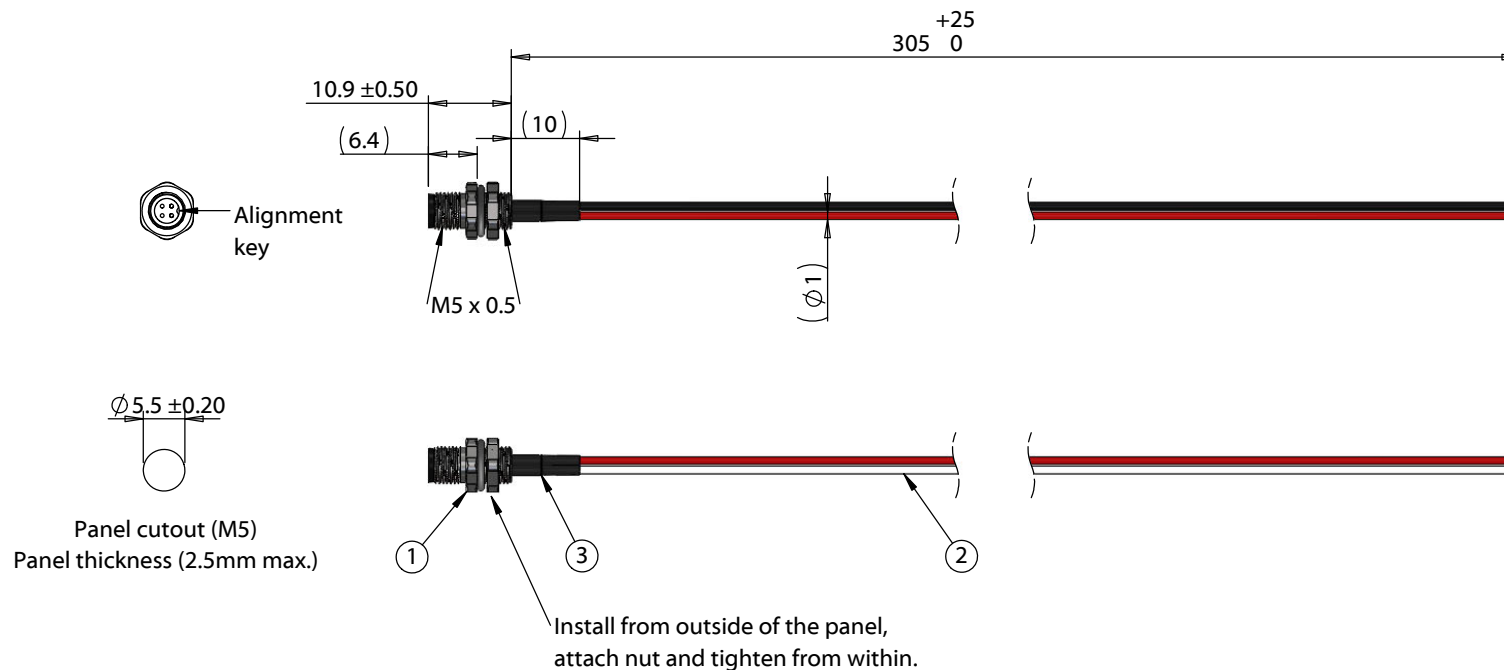

Notes:
Cable rated for 60 V, 1 A
Temperature: -40 ~ 85 °C

IP67 waterproof rating when mated with corresponding (IP67) connector and installed properly in panel

Cables individually packaged in PE bag
Functionally equivalent components may be substituted



Wiring Diagram	
54-00096	wire color (P/N)
1	red (30-01772)
2	black (30-01773)
3	green (30-01777)
4	white (30-01774)

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	4/21/2021	Initial release	AG <small>Digitally signed by AG Date: 2021.04.21 10:58:07 -07'00'</small>	RoHS compliant	
			Verified: AW <small>Digitally signed by AW Date: 2021.04.21 14:29:43 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 305 mm, M5 4C plug panel mount 54-00096 to blunt cut, 26 AWG, UL 11028 hook-up wire	
			Size: A		Part number: 10-04042
			Scale: 1:1		Sheet 1 of 1

5

4

3

2

1