
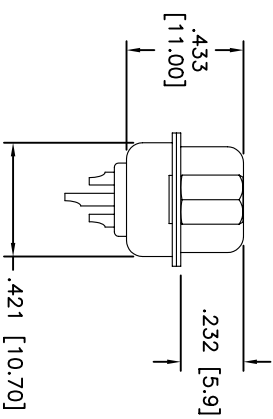
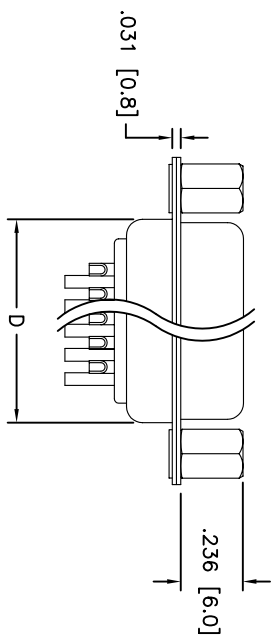


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/15/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

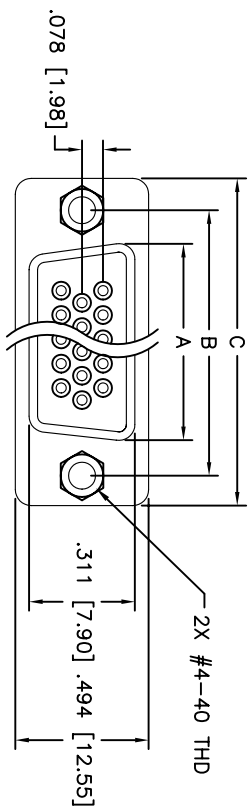

Unit: Inch / mm

POSITIONS	Socket Dimensions			
	A	B	C	D
15	.643 (16.33)	.984 (24.99)	1.213 (30.81)	.759 (19.28)
26	.971 (24.66)	1.312 (33.32)	1.541 (39.14)	1.083 (27.51)
44	1.511 (38.38)	1.852 (47.04)	2.008 (53.04)	1.626 (41.30)
62	2.159 (54.84)	2.500 (63.50)	2.729 (69.32)	2.272 (57.71)

**SPECIFICATIONS:**  
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: Gold Flash over Nickel underplate overall  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Insulation resistance: 5000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -65°C to +125°C

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**D-SUB, HIGH DENSITY, STRAIGHT FEMALE SOLDER CUP**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	TOLERANCES: EXCEPT AS NOTED	INCHES	HOLDERS	DATE
.X	± .10	ØX	± .10	
.XX	± .020	ØXXX	± .015	
.XXX	± .015	ØXXXX	± .010	
APPROVALS		DATE		
DRAWN	SS	11/15/04		
CHECKED				
APPROVED				

6 5 4 3 2 1

SIZE	PART NO.	REV.
X	HDTXX-SD-JS	-
REF:	SCALE: NTS	SHEET 1 OF 1