



DATE	REV	ECN	APP'D. BY
10/20/20	A0	RELEASED	ADB
-	-	-	-

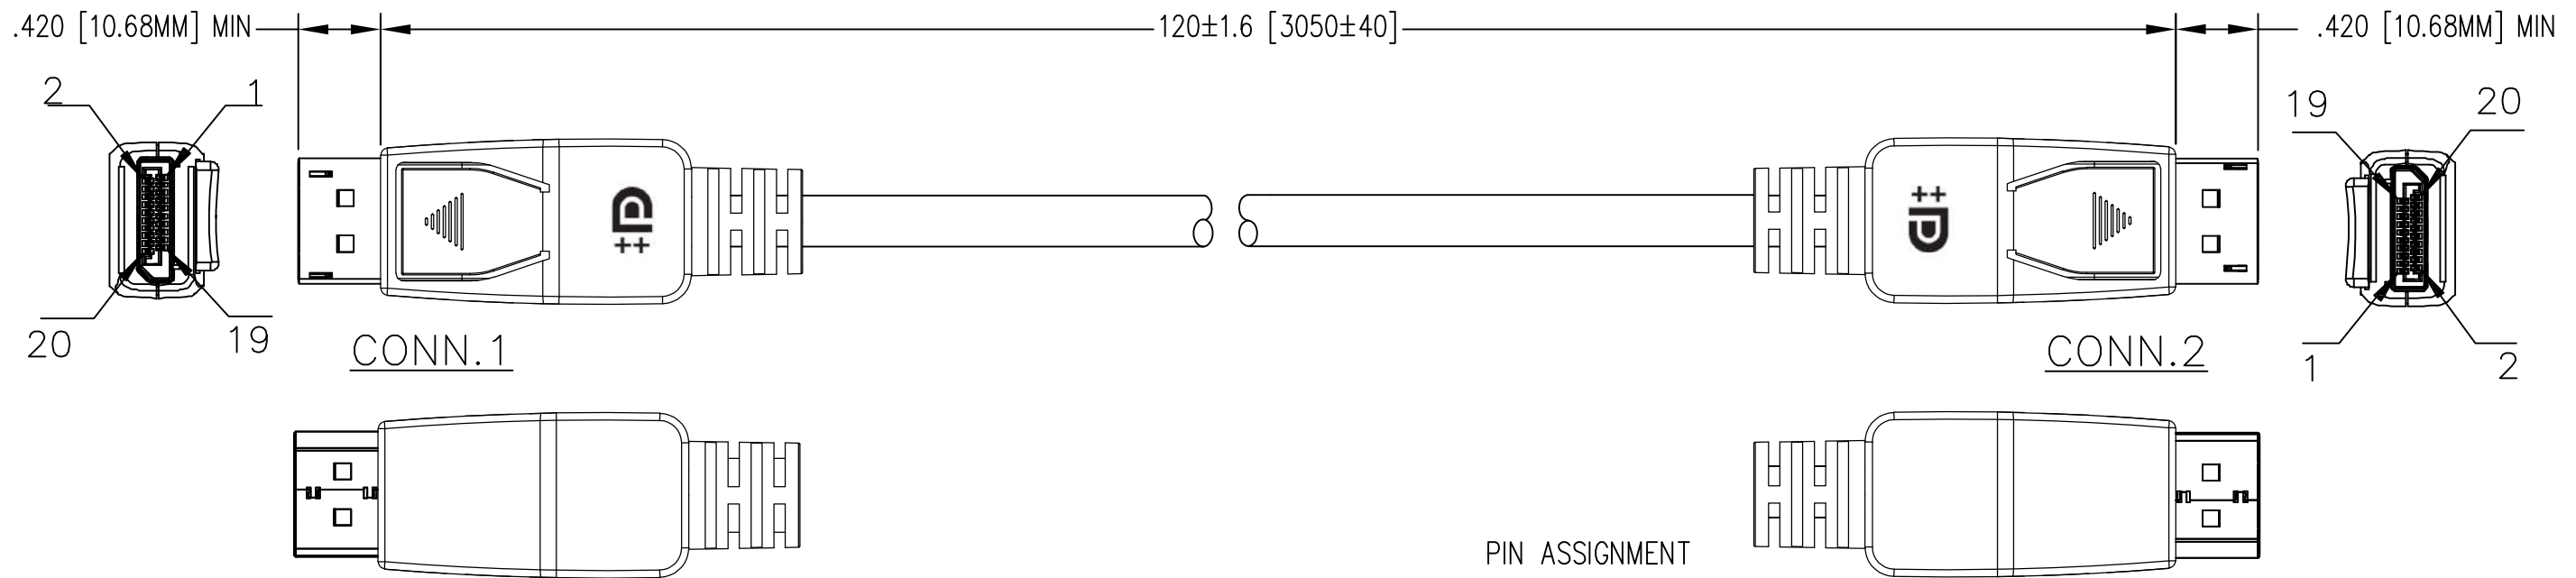


NOTES:

- COMPLIANT WITH DISPLAYPORT 1.4 SPECIFICATION.
- CONNECTOR COMPONENTS:
 TRANSPARENT DUST COVER
 INSIDE MOLDING: LDPE
 STRAIN RELIEF: 45P PVC, BLACK
 OUTSIDE MOLDING: ABS, BLACK
 SHELL PLATING: GOLD FLASH
 CONTACT: GOLD PLATING
 CABLE: DP1.4
 [27AWG(7/0.14TC)+EAM]*5P+27AWG(7/0.14TC)*4C+AEB(16/10/0.12 85%AL)
 OD: 0.29 [7.3] COLOR: BLACK
 CABLE PRINTING: DISPLAYPORT CABLE E342987 AWM STYLE 20276 80°C 30V VW-1
- ELECTRICAL TESTING:
 100% OPEN & SHORT & CONTINUITY WIRE TEST
 CONTACT RESISTANCE: 3 OHM MAX.
 INSULATION RESISTANCE: 10M OHM MIN.
 HI-POT: 100V DC/10ms
- PACKAGING:
 ONE CABLE PER BAG




PIN ASSIGNMENT

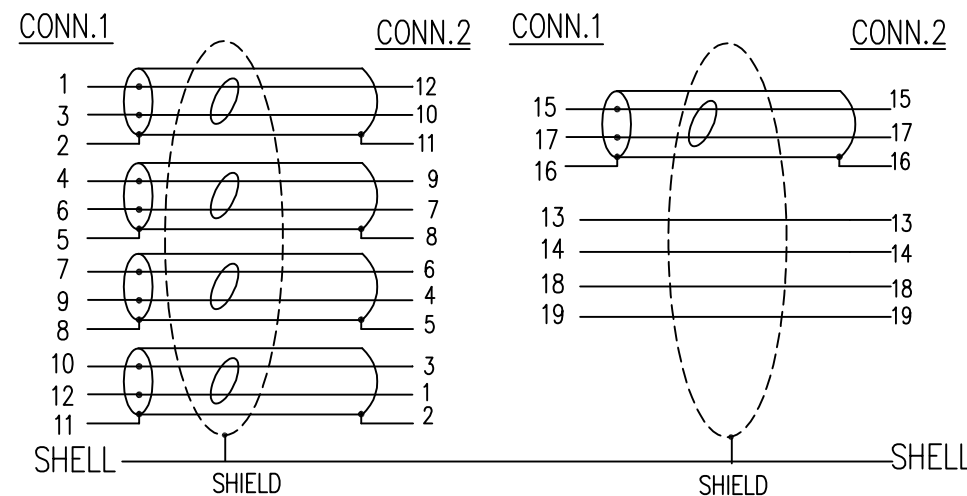

P/N	LENGTH
BC-4D4D010F	120 [3050]

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING
 DRAWING IS SUBJECT TO
 CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]
 UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE ±.005 [0.13]
 ANGLES ARE ± 1°

SHEET NO. 1 OF 1



TITLE: DISPLAY PORT 1.4 CABLE, MALE TO MALE, 10 FEET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
 ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
 BEL FUSE, INC. AND SHALL NOT BE REPRODUCED,
 COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
 CONSENT OF BEL FUSE, INC.

DRN BY: JE	DATE 10/07/20
APPD BY: ADB	DATE 10/20/20
DWG NO. CT999227	REV. A0

