


# T1/E1/CEPT/ISDN-PRI TRANSFORMER

Quad Port SMT Transformer/Choke Modules,  
1500 Vrms, Extended Temperature Range

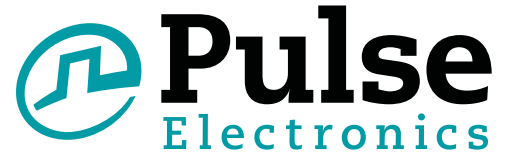

- ⊕ RoHS peak reflow temperature rating: 245°C
- ⊕ Optimized for enhanced EMC performance
- ⊕ Quad-port SMT package contains Transformers with optional Common Mode Chokes on both transmit and receive channels
- ⊕ Extended temperature range
- ⊕ Isolation Voltage: 1500 Vrms

## Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C



RoHS Compliant Part Number		Turns Ratio (Pri:Sec ±2%)		Line Side OCL (mH MIN)	Cw/w (pF MAX)	Primary Pins	
w/CMC	wo/CMC	TX	RX			TX	RX
TX1263NL	TX1262NL	1:2	1:2	1.2	35	1-2, 6-7, 11-12, 16-17	3-4, 8-9, 13-14, 18-19
TX1267NL	TX1266NL	1:2	1:1	1.2	35	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20

- NOTES:**
- Other Transformer/Choke modules available. Please contact Pulse Applications Engineering. Please refer to data sheet T622 for a list of additional Octal Transformers without Common Mode Chokes.
  - RoHS compliant parts have an "NL" suffix at the end of the part number, TX1267NL.
  - To order Tape & Reel packaging add a "T" suffix to the part number (i.e. TX1263NL becomes TX1263NLT).

### Mechanical

### Schematic


#### TX1263NL / 1267NL

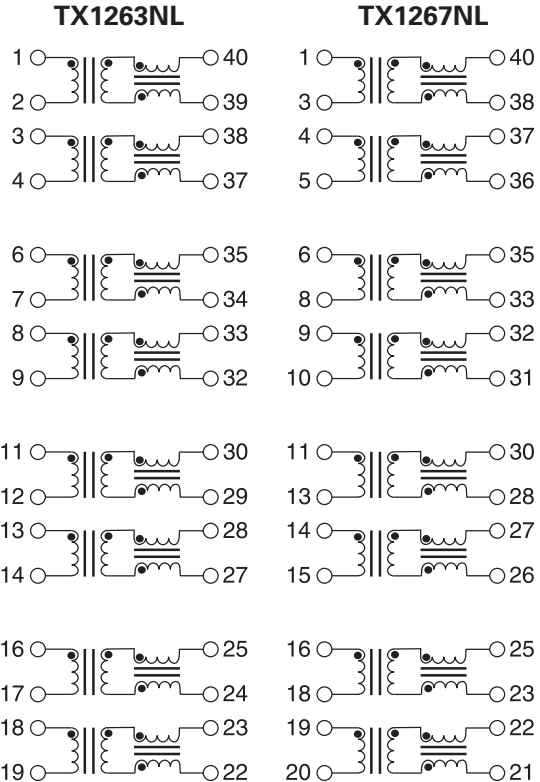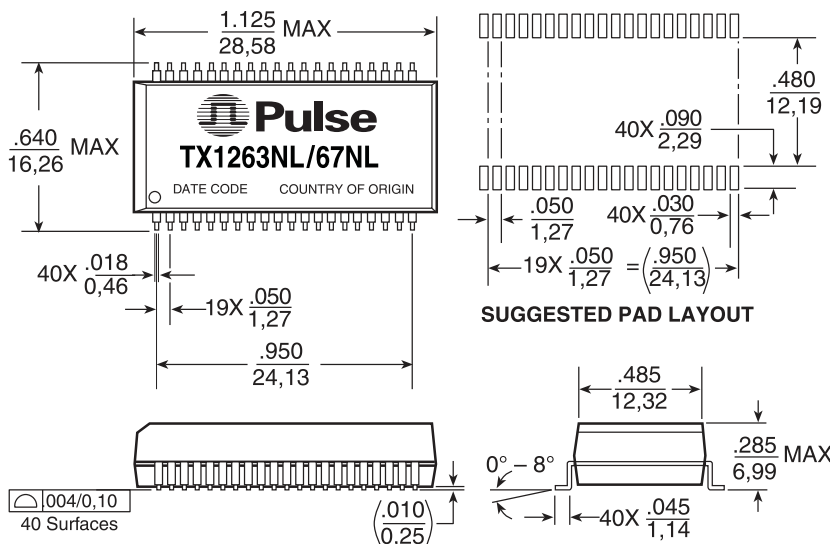

Weight.....5.0 grams      Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
 Tape & Reel..... 250/reel      Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$   
 Tube..... 15/tube

# T1/E1/CEPT/ISDN-PRI TRANSFORMER



## Quad Port SMT Transformer/Choke Modules, 1500 Vrms, Extended Temperature Range

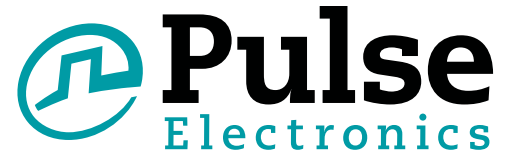


### Mechanical

### Schematics

#### TX1262NL, TX1266NL

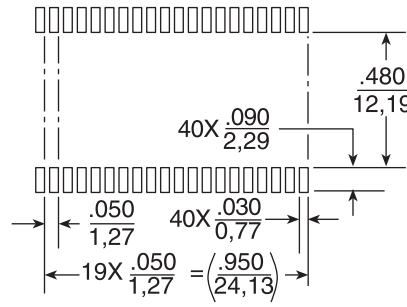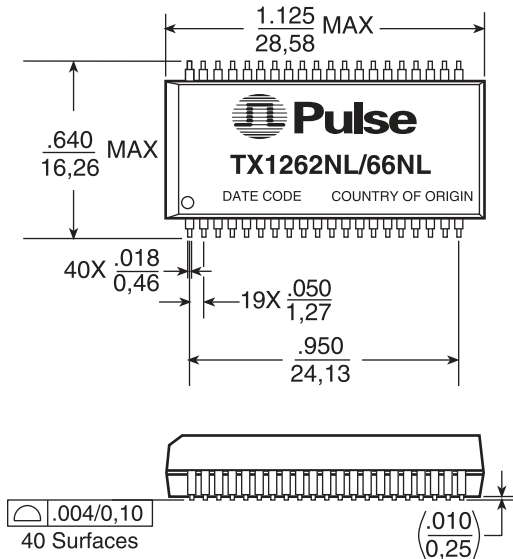


**SUGGESTED PAD LAYOUT**

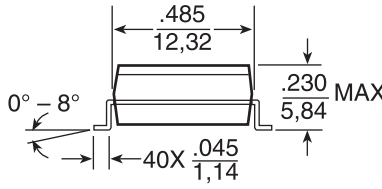


Weight.....4.0 grams  
Tape & Reel..... 250/reel  
Tube.....15/tube

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$

#### TX1262NL

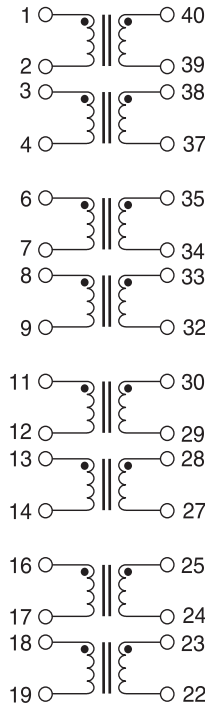

#### TX1266NL

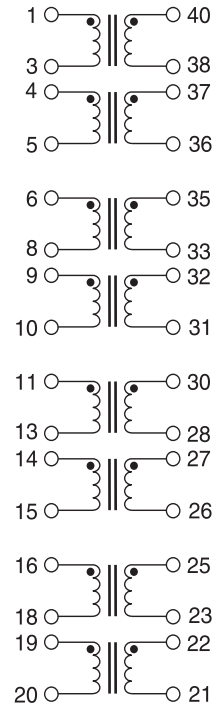

### For More Information:

**Pulse North American Headquarters**  
12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

**Pulse European Headquarters**  
Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

**Pulse China Headquarters**  
B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Rd.  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057

**Pulse North China**  
Room 1503  
XinYin Building  
No. 888 YiShan Rd.  
Shanghai 200233  
China

**Pulse South Asia**  
150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324

**Pulse North Asia**  
No. 26  
Kao Ching Rd.  
Yang Mei Chen  
Taoyuan Hsien  
Taiwan, R. O. C.  
32667

TEL: 858 674 8100  
FAX: 858 674 8262

TEL: 49 7032 7806 0  
FAX: 49 7032 7806 12

TEL: 86 755 33966678  
FAX: 86 755 33966700

TEL: 86 21 32181071  
FAX: 86 21 32181396

TEL: 65 6287 8998  
FAX: 65 6280 0080

TEL: 886 3 4643715  
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. Pulse and the Squarewave logo are trademarks of Pulse Electronics Corporation, registered in the U.S. and other countries. © Copyright, 2011. Pulse Electronics Corporation. All rights reserved.