

	Ŧ	G	нт. П	m	D	0



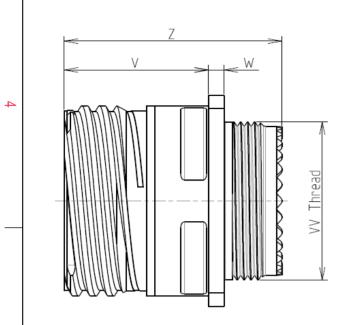

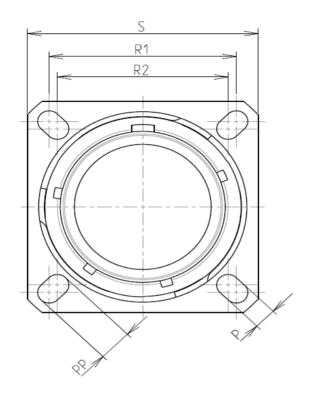

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: −65°C to +175°C				
-Salt Spray	: 500 hours				

: 12.01 g ± 10%

8D 0

G

11

Ζ

01

А

F

С


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01



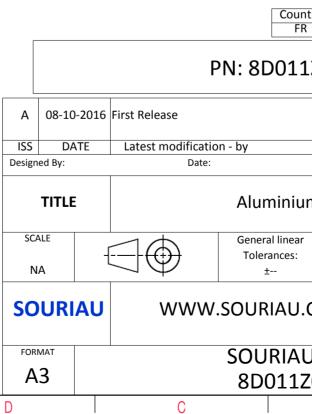

	Φ		Þ			
AS EX4	AMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)						
Intry R	y Jurisdiction & Control List Not Listed					
1Z01AC						
				MOD N°		
um	CUSTOMER DRAWING					
ar	NPRDS / PROJECT				-	
	859 This document is the property of					
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 1AC-C			SHEET 1/2		
.20	B		A	_, <b>_</b>	J	

		G	г П	m		0
		Contact Layout				Panel Cutout
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	]		¥ 27	
ω	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
22						Country FR PN: 8D011Z
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Aluminium General linear Tolerances: ±
						SOURIAU
l	Н	G	F	E	D A3	8D011Z0

