


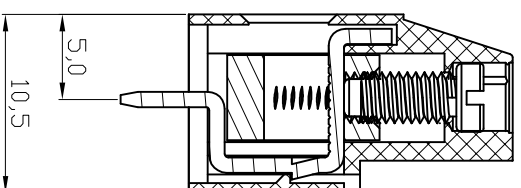
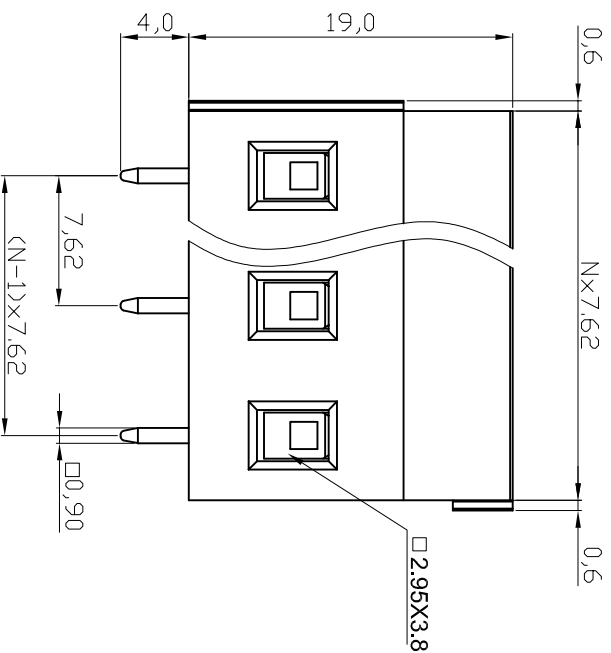
P.C.B. LAYOUT

Material


Terminal body (metal housing): Brass(CuZn)
 Terminal screw: Steel Zinc plating "-" slot type
 Contacts: Brass
 Surface of solder tail: Tin plated
 Insulator (housing): Thermoplastic (UL94V-0), Green

Electrical

Voltage rating: 300VAC
 Current rating: 20A
 Solid wire(AWG): 12-30
 Stranded wire(AWG): 12-30
 Torque(Lb-in): 3.5
 Screw: M3
 Wire strip length: 6-7mm
 Withstanding Voltage: 1.6KV
 Operating temperature: -40°C to +115°C
 Soldering temperature: 250°C±10°C/5 Sec
 Safety Approval:  US



N=Number of contacts

RoHS compliant

 File No.: E349947

Scale	1:1		
TOLERANCE			
X.	±0.50	Drawn	Date
X.X	±0.30	Approved	19.04.2016
X.XX	±0.10		
DIM			
X.°	±1°	② Add the UL File No.	
X.X°	±X°	① Drawn	29.07.2009
Angle	TOL	Id.	
		Modification	Date
			Name

ASSMANN
 WSW/ components

Customer-No.		
ASSMANN WSW-No.	A-TB762-VJXH	
Drawing-No.	ASS 3596 CO	rev02
Replace	Sheet	

1 2 3 4 5 6 7

SVXXXX