

## 25A, 60V Trench Schottky Surface Mount Rectifier

### FEATURES

- AEC-Q101 qualified
- Patented Trench Schottky technology
- Excellent high temperature stability
- Low forward voltage
- Lower power loss/ high efficiency
- High forward surge capability
- Ideal for automated placement
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Low voltage, high freq. inverter
- DC/DC converter
- Freewheeling diodes
- Reverse battery protection
- Car lighting

### MECHANICAL DATA

- Case: PDFN56
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.096g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	25	A
$V_{RRM}$	60	V
$I_{FSM}$	220	A
$T_{JMAX}$	150	°C
Package	PDFN56	
Configuration	Single die	



PDFN56



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	TSN525M60H	UNIT
Marking code on the device		525M60	
Repetitive peak reverse voltage	$V_{RRM}$	60	V
Reverse voltage, total rms value	$V_{R(RMS)}$	42	V
Forward current	$I_F$	25	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	220	A
Junction temperature	$T_J$	- 55 to +150	°C
Storage temperature	$T_{STG}$	- 55 to +150	°C

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-lead thermal resistance	$R_{\theta JL}$	9	°C/W

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
<b>PARAMETER</b>	<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage <sup>(1)</sup>	$I_F = 12.5\text{A}, T_J = 25^\circ\text{C}$	$V_F$	0.48	0.54	V
	$I_F = 25.0\text{A}, T_J = 25^\circ\text{C}$		0.57	0.63	V
	$I_F = 12.5\text{A}, T_J = 125^\circ\text{C}$		0.40	0.50	V
	$I_F = 25.0\text{A}, T_J = 125^\circ\text{C}$		0.53	0.59	V
Reverse current @ rated $V_R$ <sup>(2)</sup>	$T_J = 25^\circ\text{C}$	$I_R$	-	500	$\mu\text{A}$
	$T_J = 125^\circ\text{C}$		-	100	mA

**Notes:**


1. Pulse test with PW = 0.3ms
2. Pulse test with PW = 30ms

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b>	<b>PACKAGE</b>	<b>PACKING</b>
TSN525M60H	PDFN56	6,000 / Tape & Reel


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

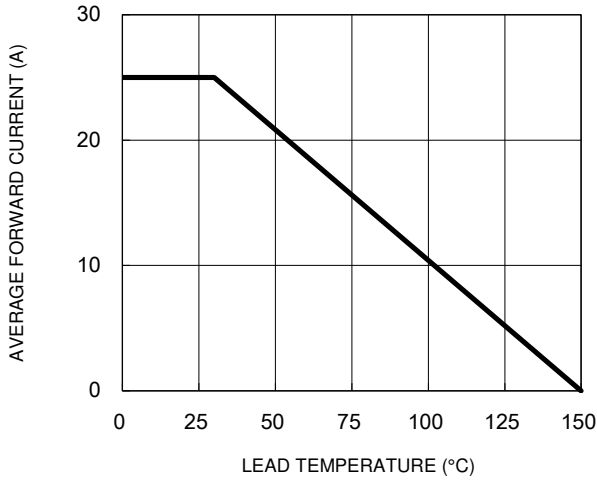


**Fig.2 Typical Junction Capacitance**

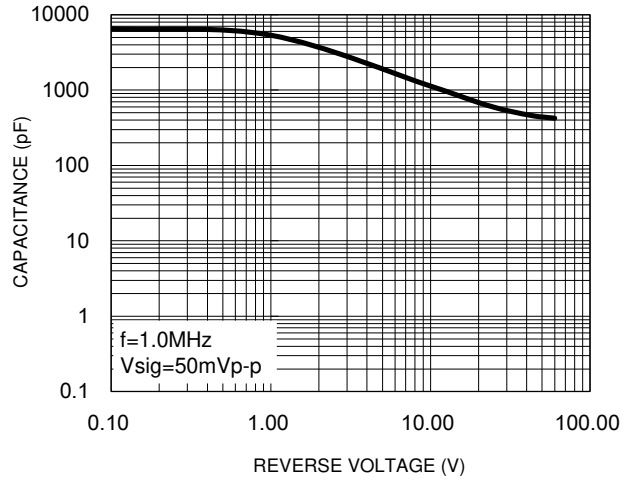

**Fig.3 Typical Reverse Characteristics**

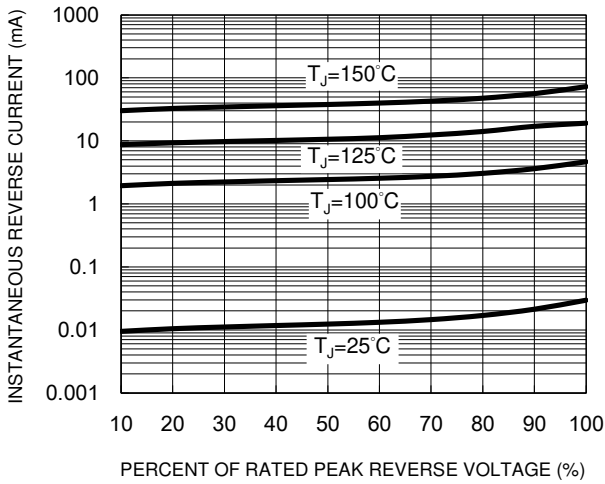


**Fig.4 Typical Forward Characteristics**

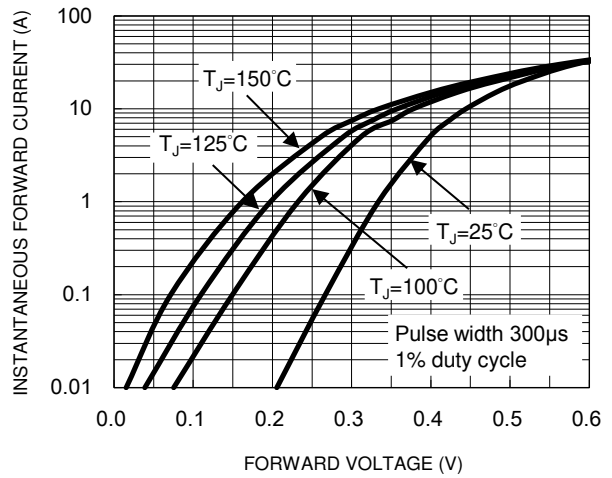


**PACKAGE OUTLINE DIMENSIONS**

PDFN56

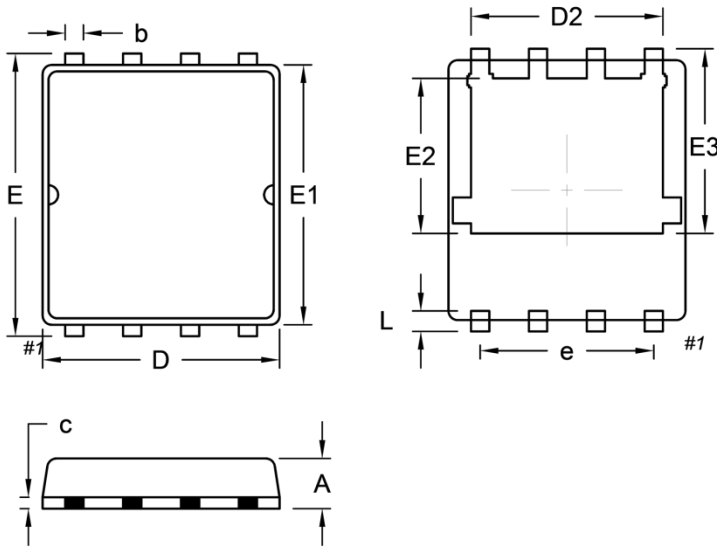


DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.95	1.25	0.037	0.049
b	0.25	0.55	0.010	0.022
c	0.10	0.40	0.004	0.016
D	5.05	5.35	0.199	0.211
D2	4.06	4.36	0.160	0.172
E	6.00	6.40	0.236	0.252
E1	5.55	5.85	0.219	0.230
E2	3.25	3.55	0.128	0.140
E3	3.90	4.20	0.154	0.165
e	3.81(TYP.)		0.150(TYP.)	
L	0.30	0.60	0.012	0.024

**SUGGESTED PAD LAYOUT**

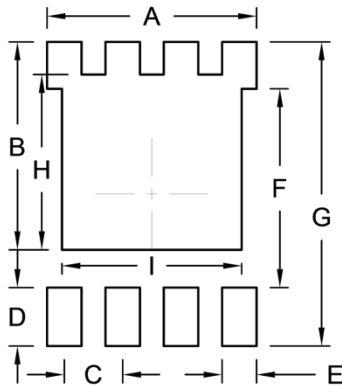

Symbol	Unit (mm)	Unit (inch)
A	4.56	0.180
B	4.52	0.178
C	1.27	0.050
D	1.27	0.050
E	0.75	0.030
F	4.32	0.170
G	6.61	0.260
H	3.81	0.150
I	3.91	0.154

**MARKING DIAGRAM**



- P/N = Marking Code
- YW = Date Code
- F = Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.