



PAGE 1/2	ISSUE 22-03-16C	SERIES N	PART NUMBER R161418130
----------	------------------------	-----------------	-------------------------------

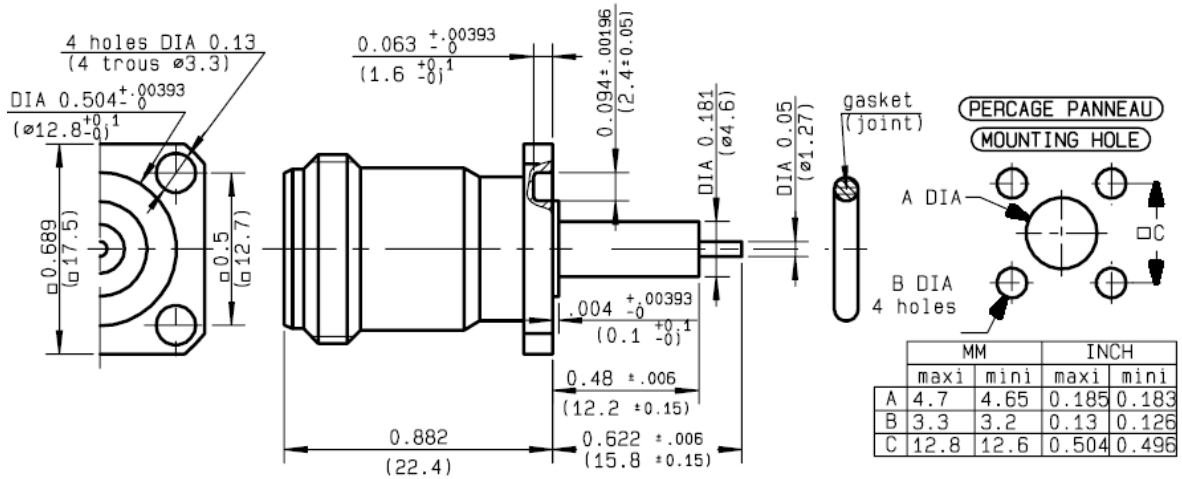

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	BRASS.	BBR
Center contact	BERYLLIUM COPPER	GOLD OVER NICKEL
Outer contact	BRASS.	BBR
Insulator	PTFE	
Gasket	NEOPRENE RUBBER	
Others parts	ULTEM	
-	-	-
-	-	-
-	-	-

PAGE 2/2	ISSUE 22-03-16C	SERIES N	PART NUMBER R161418130
----------	------------------------	-----------------	-------------------------------

PACKAGING

Standard	Unit	Other
50	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω
Frequency		0-11	GHz
VSWR	1.04	+	0.0700 x F(GHz) Maxi
Insertion loss		0.25	√F(GHz) dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating		500	Veff Maxi
Dielectric withstanding voltage		1000	Veff mini
Insulation resistance		5000	MΩ mini

ENVIRONMENTAL

Operating temperature	-55/+155	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		27	N mini
Axial force – Opposite end		27	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		NA	N.cm
Panel nut		NA	N.cm
Mating life		500	Cycles mini
Weight		20.4000	g

SPECIFICATION

OTHER CHARACTERISTICS

Assembly instruction:

Others:

PUISSANCE : 150 Watts Maxi (1-10 Ghz)