





TOP VIEW

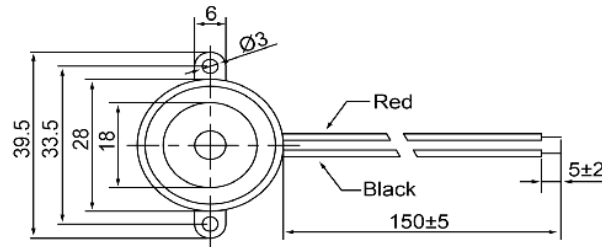

SIDE VIEW



Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description		Date	Approved	
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S	
Resonant Frequency	3,500	(Hz)							
Rated Voltage	12	(V)							
SPL @ 10cm	95	(dBA)							
Tone	Single								
Mount Type	Flange Mount								
Voltage Range	4 ~ 28	(V)							
Max Rated Current	15	(mA)							
Housing Material	ABS								
Operating Temperature	-20 ~ +60	°C							
Storage Temperature	-30 ~ +70	°C							
Weight	15	(g)							
 <b>DB UNLIMITED</b>						<b>IP283512-1</b>		Drawn by      Date      Checked by      Date      Approved by      Date	
								A.B.      10/21/2013      C.E.      10/21/2013      J.S      10/21/2013	

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).