



DIMENSIONS mm (inches)

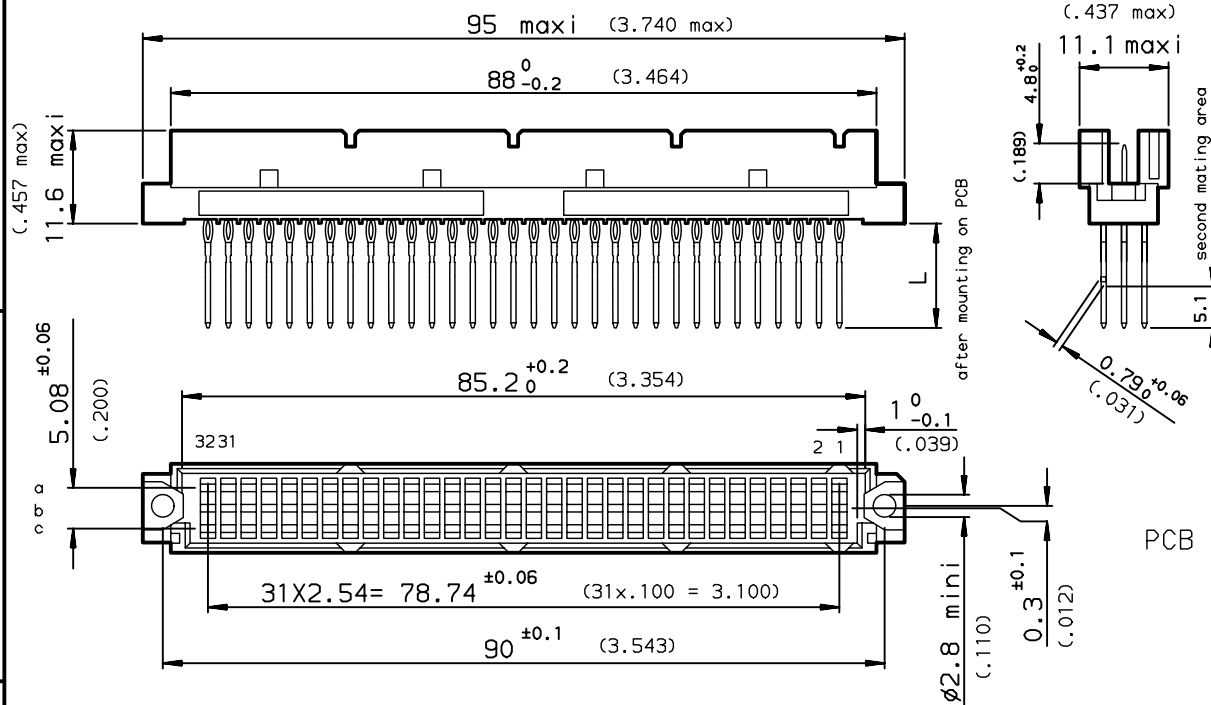

PCB DRILLING

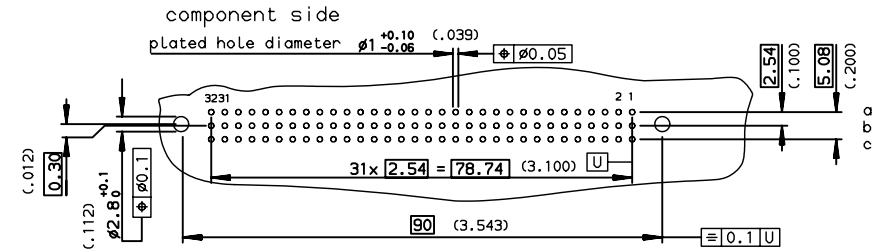

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm 
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1992/07/07	ANGULAR	0.X ±0.1	size A3
Eng	TARON	1992/07/07	LINEAR	0.XX ±0.1	Scale 1:1
Chr	LEGARE	1992/07/07	0.XX' ±2'	0.XXX ±0.1	ECN LS06-0095
Appr	LEGARE	1992/07/07	Product family	DIN 8609	Spec ref -
		title STRAIGHT MALE - STYLE R			Rev. F
		PRESS FIT REAR PLUG UP for NOKIA			dwg no C-8609-0432
catalog no		CUSTOMER			sheet 1 of 1

rev	ecn no	dr	date
D	-	ROU	1997/09/25
E	LS05-004	JTA	2005/02/28
F	LS06-0095	LGO	2006/06/17
-	-	-	-
-	-	-	-
-	-	-	-

PART NUMBER	8609	78	7	9	5
PIN OUT					
rows a-b-c	- - - - -	3 - 96			
rows a-c	- - - - -	4 - 64			
NUMBER OF CONTACTS					
TERMINATION					
L = 13.25 ±0.25 (.521)	- - - - -	near plug up	- - - - -	96	
L = 17.25 ±0.25 (.679)	- - - - -	- rear plug up + 1 wrap	- - - - -	97	
PERFORMANCE CLASS					9
DIN 41612 class 1					
TERMINATION TYPE					000
TIN LEAD	- - - - -				LF
LEAD FREE	- - - - -				



Copyright FCI.