

# HC-28S1N126300 - Device connector front mounting



1590428

<https://www.phoenixcontact.com/pc/products/1590428>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, straight, Screw locking mechanism, M27, contact connection type: Socket, Axial O-ring, Central fixing, shielded: yes, degree of protection: IP67, when plugged in, number of positions: 28, connection method: Solder connection, series: HC

## Commercial data

Item number	1590428
Packing unit	24 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAJL
GTIN	4046356187541
Weight per piece (including packing)	70.44 g
Weight per piece (excluding packing)	54.77 g
Customs tariff number	85366990
Country of origin	DE

# HC-28S1N126300 - Device connector front mounting



1590428

<https://www.phoenixcontact.com/pc/products/1590428>

## Technical data

### Mounting

Mounting	Central fixing
Connection method	Solder connection

### Product properties

Product type	Circular connectors (device side)
Number of positions	28
Application	Signal
Series	HC
Shielded	yes
Coding	N
Thread type	M27

### Material specifications

Flammability rating according to UL 94	V0
Seal material	FPM or NBR or EPDM
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA66
Contact material	CuZn
Contact surface	Nickel-plated, gold coating
Gasket and O-ring material	FPM

### Electrical properties

#### Contact

Contact diameter	1 mm
Min. cross section	0.08 mm <sup>2</sup>
Max. cross section	1 mm <sup>2</sup>
Max. current	8 A
Nominal voltage U <sub>N</sub>	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

### Connection data

#### Conductor connection

Connection method	Solder connection
Contact connection type	Socket

### Mechanical properties

#### Mechanical data

# HC-28S1N126300 - Device connector front mounting



1590428

<https://www.phoenixcontact.com/pc/products/1590428>

Insertion/withdrawal cycles	50
-----------------------------	----

## Connector

Type	straight
Direction of rotation	Standard

## Environmental and real-life conditions

### Ambient conditions


Degree of protection	IP67, when plugged in
Ambient temperature (operation)	-20 °C ... 125 °C
Altitude	2000 m

1590428


<https://www.phoenixcontact.com/pc/products/1590428>

## Drawings


Dimensional drawing

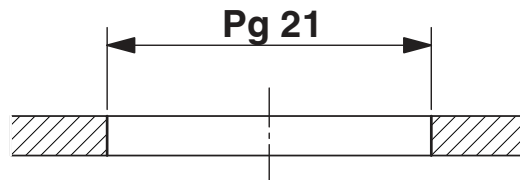

Schematic diagram

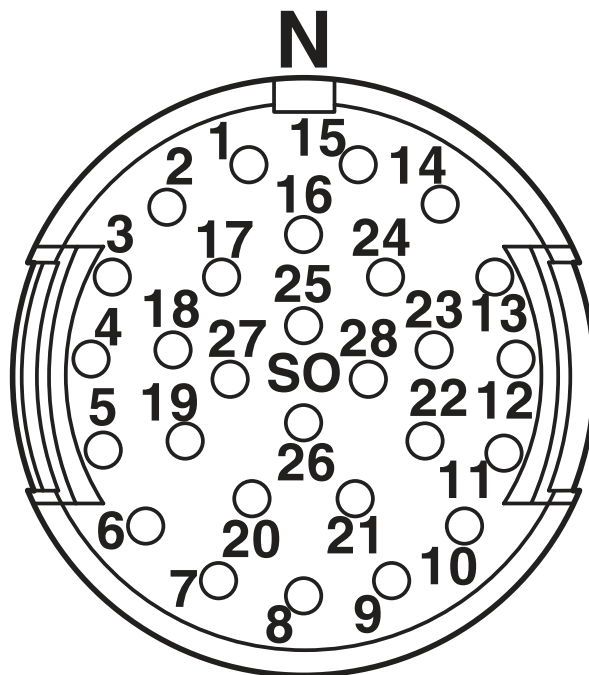

Dimensional drawing

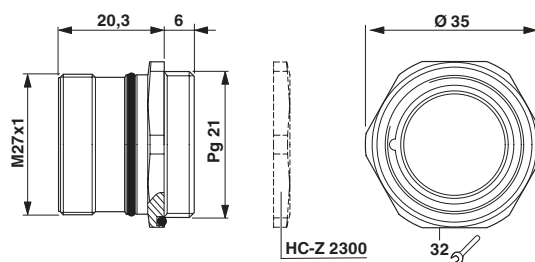

# HC-28S1N126300 - Device connector front mounting



1590428

<https://www.phoenixcontact.com/pc/products/1590428>

## Classifications

### ECLASS

ECLASS-11.0

27440109

### ETIM

ETIM 8.0

EC003569

### UNSPSC

UNSPSC 21.0

39121400

# HC-28S1N126300 - Device connector front mounting



1590428

<https://www.phoenixcontact.com/pc/products/1590428>

## Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	--

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)