
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00990	Connector, 8 pin M12 A-code plug, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded	1	
2	50-00983	Connector, 8 pin M12 A-code socket, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded	1	
3	30-01611	Wire, 8C TS, 24 AWG, UL20387, 300V, 105C, 60C oil, UV, 6.8 mm, shielded, VW-1, PVC, 80A, black	1	
4	24-00361	Overmold, M12 plug and jack, 90°	1	PVC, black
5	24-00349	Overmold, M12 plug and jack, 180°	1	PVC, black

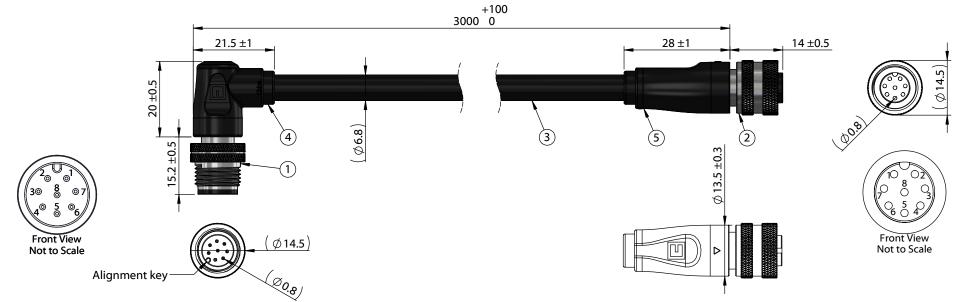

Notes:

Cable rated for 30 V, 2 A Temperature: -40 ~ 105 °C Oil resistant up to 60 °C Water resistant up to 75 °C **UV** resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

Wiring Diagram							
50-00990	wire color	50-00983					
1	red	1					
2	yellow	2					
3	black	3					
4	white	4					
5	orange	5					
6	blue	6					
7	green	7					
8	purple	8					
Shell	shield/drain	Shell					

Revision:	Date:	Description:	Prepared: D D Digitally signed	Notes:
А	12/30/2021	Initial release	Dbate: 2022.01.24 11:30:08-08:00*	RoHS
			Verified: MP Digitally signed by MP Date: 202201.24 14:11.25 -0800'	Funct
			Dimensions are in	
			millimeters. Tolerances:	Descri
			X: ± 0.5 mm	Cable,
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	to 0.8 wire
		5	4	

s:

S compliant

ction test: no open, no short circuit, no mittent

ription:

e, 3000 mm, 0.8 mm 8C 90° 50-00990 M12 plug 8 mm 50-00983 M12 socket, 24 AWG, 30-01611

tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com

Size:	Part number:					
Α	10-050	097				
Scale:	1:1		Sheet 1 of 1			

3 2