


DETAIL Z
SCALE 14:1

PCB LAYOUT -- USING THE BILINGUAL FOOT PRINT
(SCALE 5:1)
(NOTE: DATUM -A- IS THE TOP SURFACES OF THE COPPER TRACES)
(NOTE: THE SOLDERABLE SURFACES ARE HATCHED)

- NOTES:
1. MATERIAL
MOLDING: GLASS FILLED LCP, COLOR = BLACK.
SOLDER NAILS: COPPER ALLOY.
 2. FINISHES
MOLDING: NONE
SOLDER NAILS: TIN OVER NICKEL PLATING
 3. PRODUCT SPECIFICATION: PS-45240-001
 4. PACKAGING: PK-45740-001
 5. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND FEATURES LOCATED ACROSS A CENTERLINE TO BE SYMMETRIC TO WITHIN 0.25 TOTAL.
 6. THE 1394b SOCKETS ARE TO BE SOLDERED TO THE PCB BEFORE ASSEMBLING THE 457400001 TRIPLE PORT SHEATH.
 7. THREE 1394b SOCKETS MUST BE USED WITH EACH 457400001 TRIPLE PORT SHEATH.
 8. SEE AS-45740-001 FOR ADDITIONAL MOUNTING INSTRUCTIONS.
 9. THE PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

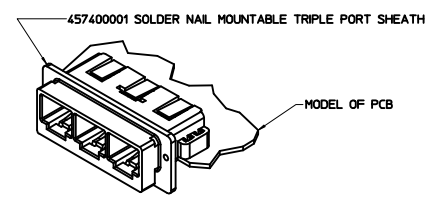

ISOMETRIC PROJECTION OF 45740-0001 MOUNTED TO PCB
(NOTE THE THREE UNDERLYING 1394b BILINGUAL SOCKETS ARE NOT VISABLE)

QAL 2828 TO 2943 IEC NO: UCP2007-0876 DRAWN BY: DRWNS/SCHMIDT CHYKJ/BELL APPROVED BY: APPRESMITH DATE: 2006/12/19 DATE: 2006/12/20	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla=0$ $\nabla=0$	mm INCH	MM ONLY	2:1	METRIC	
	DESCRIPTION	4 PLACES ± --- ± ---	DRAWN BY	DATE	TITLE	SHEATH SOLDER TAIL MOUNT TRIPLE PORT
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	3 PLACES ± --- ± ---	PELOZA	04/01/13		
	2 PLACES ± 0.13 ± ---	CHECKED BY	DATE		MOLEX INCORPORATED	
	1 PLACE ± 0.25 ± ---	APPROVED BY	DATE			
	ANGULAR ± 1/2°	MATERIAL NO.	DATE		DOCUMENT NO.	SHEET NO.
		457400001	04/01/13		SD-45740-001	1 OF 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

