
## NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 5 WATTS AVG. AT +40°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR: 1.05 + 0.01f(GHz)
- 2.0 MARKING: MARK UNIT AS SHOWN. (REF.: INK-01526-27-03)
- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.



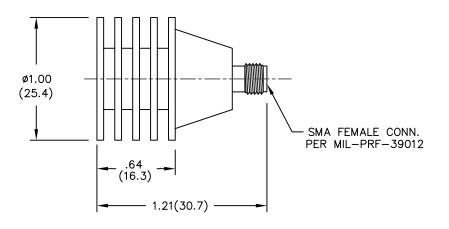

DWG. NO. WAS: 01974-01-00

PF.	DESCRIPTION	DATE
1	RELEASED	4/4/4
٧	ECR 6545	91/12/1
8	REDRAW ON CAD	3/18/92
၁	ECN 15506	9/23/96
ธ	ADDED TILEBLOCK	10/26/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. \_

A.BEATTY 3/17/92 CONCENTRICITY: T.I.R. \_\_\_\_\_\_\_\_\_ANGLES AND PERPENDICULARITY: ±1\*

MIDWEST MICROWAVE



**TERMINATION OUTLINE DRAWING** 

REV.

C1

ENG./DATE G.KOZAK 3/25/92 DRAWING NUMBER TRM-2010-F0-SMA-07-01

SCALE: 5=1 SHEET of 1