
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 21382, EM	08/08/11	HM
В	REVISE CONNECTOR APPROVAL FROM DEMKO TO ENEC-VDE, CHANGE CABLE Ø8.5 TO Ø7.0 mm, RFS.27338	05/16/19	MK

'B'



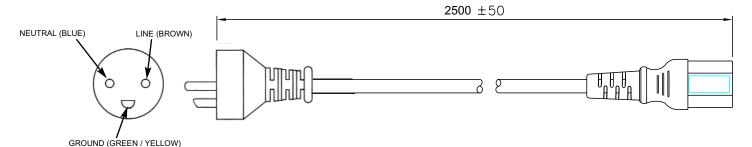

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC

CABLE TYPE / SIZE: H05VV-F, 3 x 1.0 mm²

TEMPERATURE RATING: 70° C

CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW

CABLE JACKET COLOR: BLACK

OVERALL LENGTH (L): $2500 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER: $7.0 \pm 0.2 \text{ mm}$

END 'A' PLUG; DANISH MALE PLUG AFSNIT SECTION 107-2-D1 (SRAF 1962/DB)

END 'B' IEC-320 / C13

APPROVALS PLUG: DEMKO

APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CEBEC, OVE,

APPROVALS CONNECTOR: VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ, ASEV

PACKING:

BULK



NOTES

SHEET 1/1

BROWN

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

RELEASED

DESCRIPTION

By pudxc at 11:29 am, May 23, 2019

PLUG

CONNECTOR





or use as upport, haz-inteen DRAWN: NF

DASH

APRVD: HM

PART NO

DATE:

08/08/11

DATE:

08/08/11

REV.

FSCN No.:

SCALE: NONE

G, CC

SIZE

PART NO:

S: GlobTek, Inc. www.globtek.com

186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111

Contents of this document are subject to change withou

prior notice

Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use: Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc. DWG TITLE: DANISH DETACHABLE CORDSET

G8014272M5701(R)

REV. B