
S11F1C-P02MPH0-3000


series_f, type_s1



General information

Part number	S11F1C-P02MPH0-3000	
Termination	solder	
Size	1	
Locking principle	push	
Coding	1_halfshell	
Cable Diameter	cable_mini_30	
Cable outlet	standard	



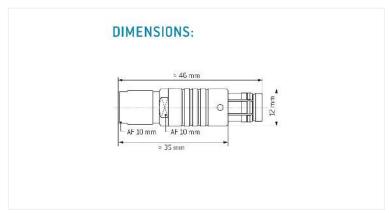

Contact insert description

Number of contacts	2
Contact type	pins
Contact diameter	13mm
Insulator material	peek
Wire cross section	20_awg
Termination	solder
Termination diameter	11mm

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	13 _{mm}	09 __ mm
Nominal current single contact	12_a	iec_60512_5_2
Nominal current insert	12 A	vde_0298_4
Test voltage	165_kv_ac	sae_13441

safety_text

Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated_unmated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2 ul_text illustrative_text

S11F1C-P02MPH0-3000 series_f, type_s1