

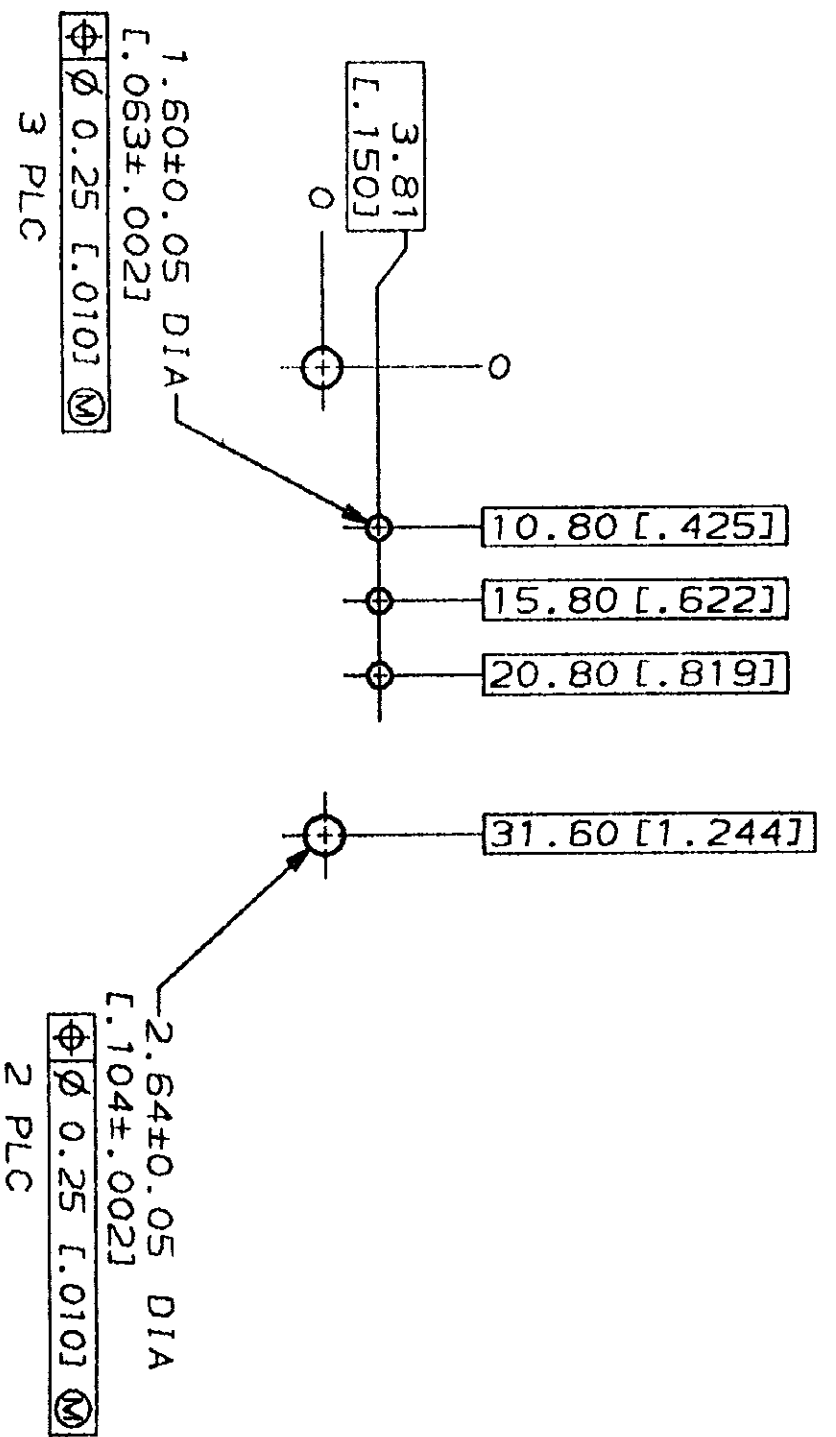


REV	DATE	DESCRIPTION
1	07/07/92	REDDRAWN WITHOUT CHANGE

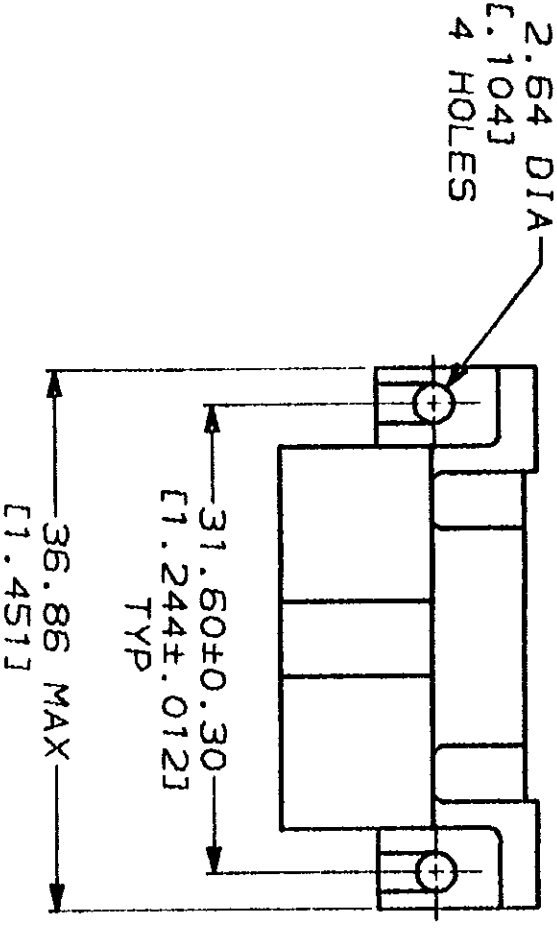

RECOMMENDED PC BOARD LAYOUT

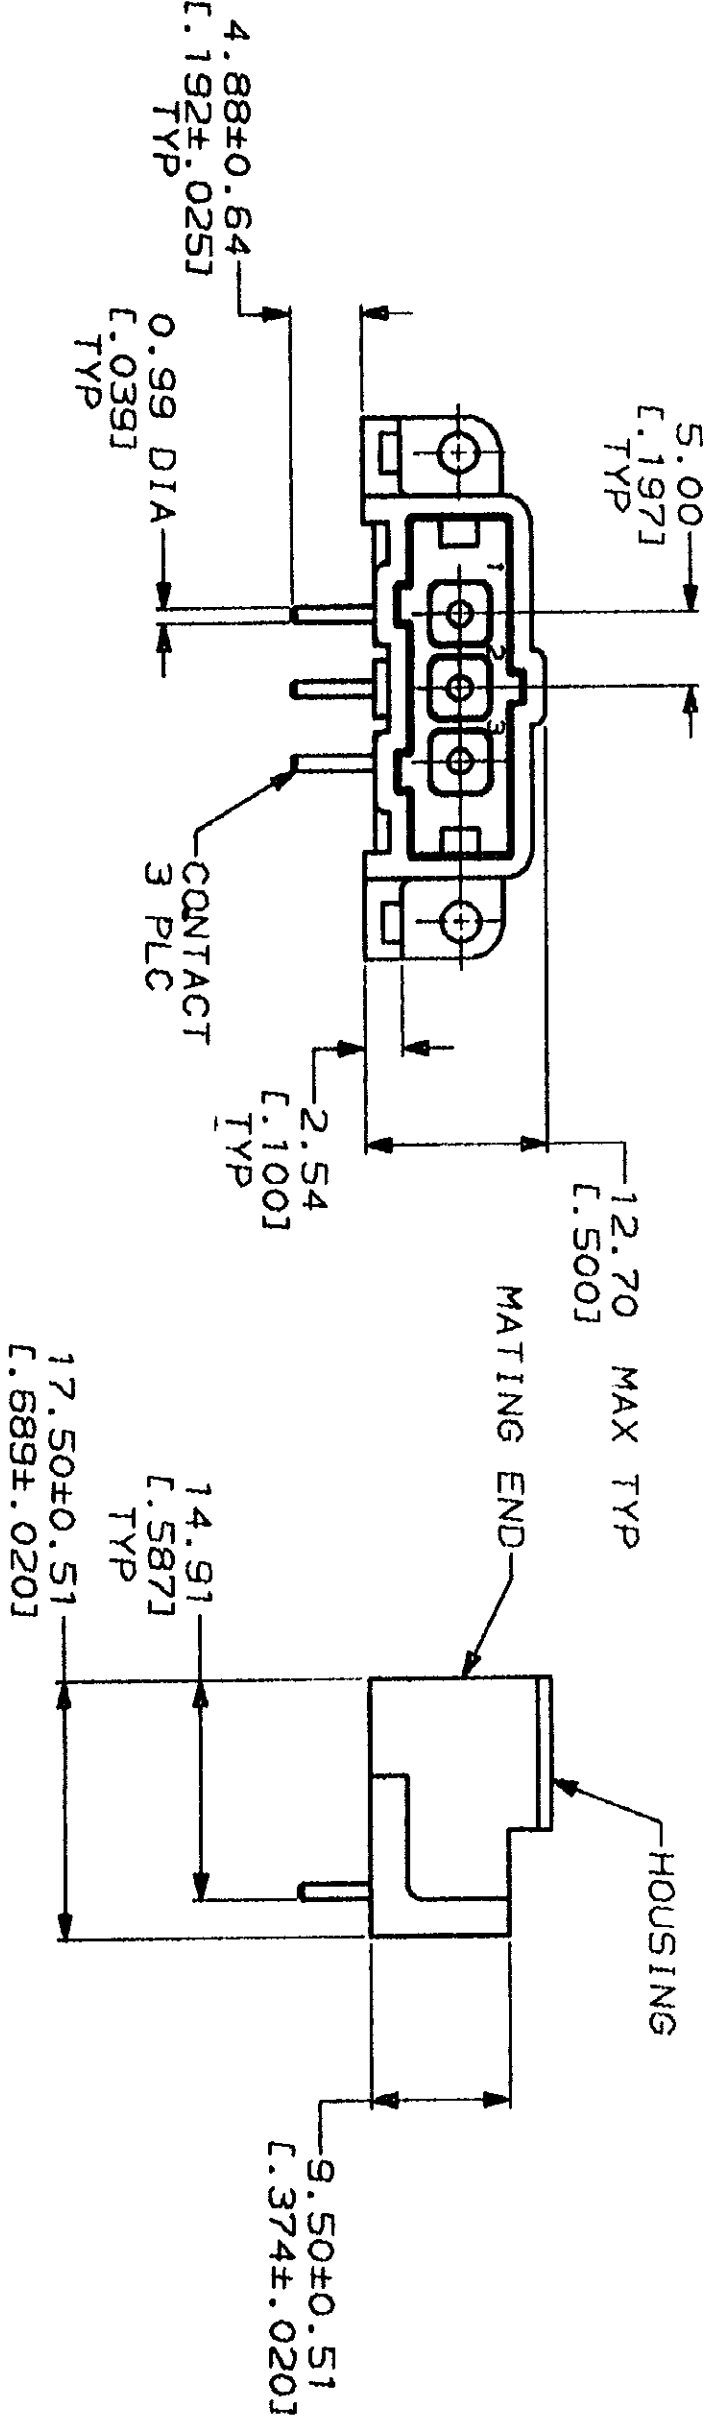

- 1 NYLON, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81µm [L.000150] MIN TIN-LEAD OVER 2.54µm [L.000100] MIN COPPER OR 1.27µm [L.000050] MIN NICKEL.
- 4 0.76µm [L.000030] MIN GOLD FOR A LENGTH OF 5.08 [L.200] MIN FROM MATING END, 3.81µm [L.000150] MIN TIN-LEAD FOR A LENGTH OF 5.51 [L.217] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [L.000050] MIN NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE COMPANY. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.25 [L.010] 3 PLC DEC ±	DR 07/07/92 L. SIPE CHK 7-24-92 R. STONE APPD 7-24-92 A. TRAVIS
MATERIAL HOUSING: $\Delta$ CONTACTS: $\Delta$	APPD 7-24-92 C. RICHIE PRODUCT SPEC
FINISH CONTACTS: SEE TABLE	APPLICATION SPEC

DR 07/07/92 L. SIPE CHK 7-24-92 R. STONE APPD 7-24-92 A. TRAVIS	NAME PIN HEADER ASSEMBLY, 3 POSN, IN-LINE, RIGHT ANGLE, SMALL METRIC CONNECTOR, METRIMATE
APPLICATION SPEC	SIZE CAGE CODE 00779
FINISH CONTACTS: SEE TABLE	SCALE 2:1

AMP	AMP Incorporated Harrisburg, PA 17105-3609
FINISH	PART NO 207541-3
	207541-1

207541

CUSTOMER DRAWING