

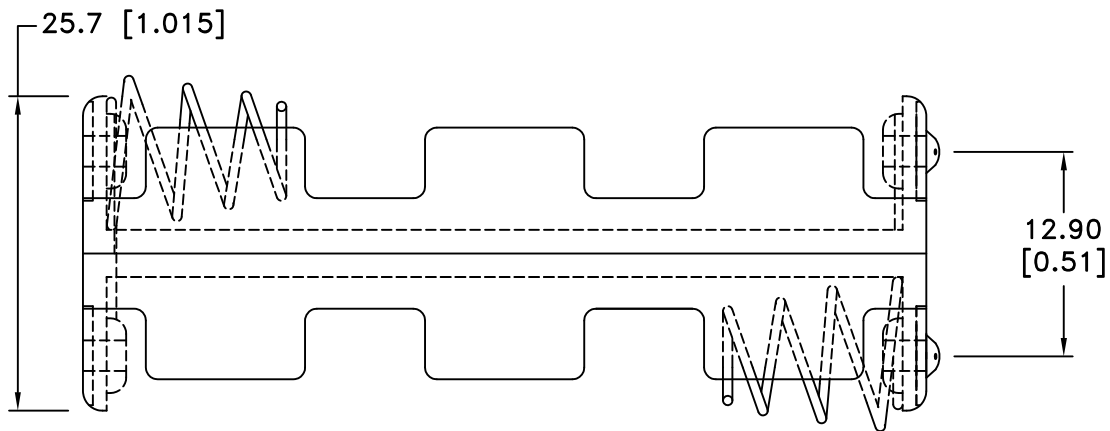



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/10/14	E	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
05/12/17	F	DIM. 16.56 WAS 17.2 ADDED DIM. 12.90	T.B.	B.S.	

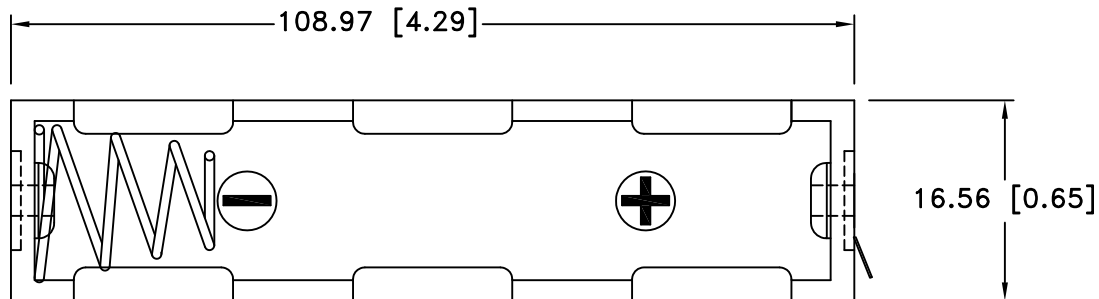

NOTES:

- Plastic material - Polypropylene
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Springs - Nickel Plated Spring Steel
- Rivets - Brass, Nickel Plated
- Lugs: Brass, Nickel Plated
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title FOUR "AA" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)		Date 05/12/17	Drawing Number BH14AAL
Angular ± 3°			