THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

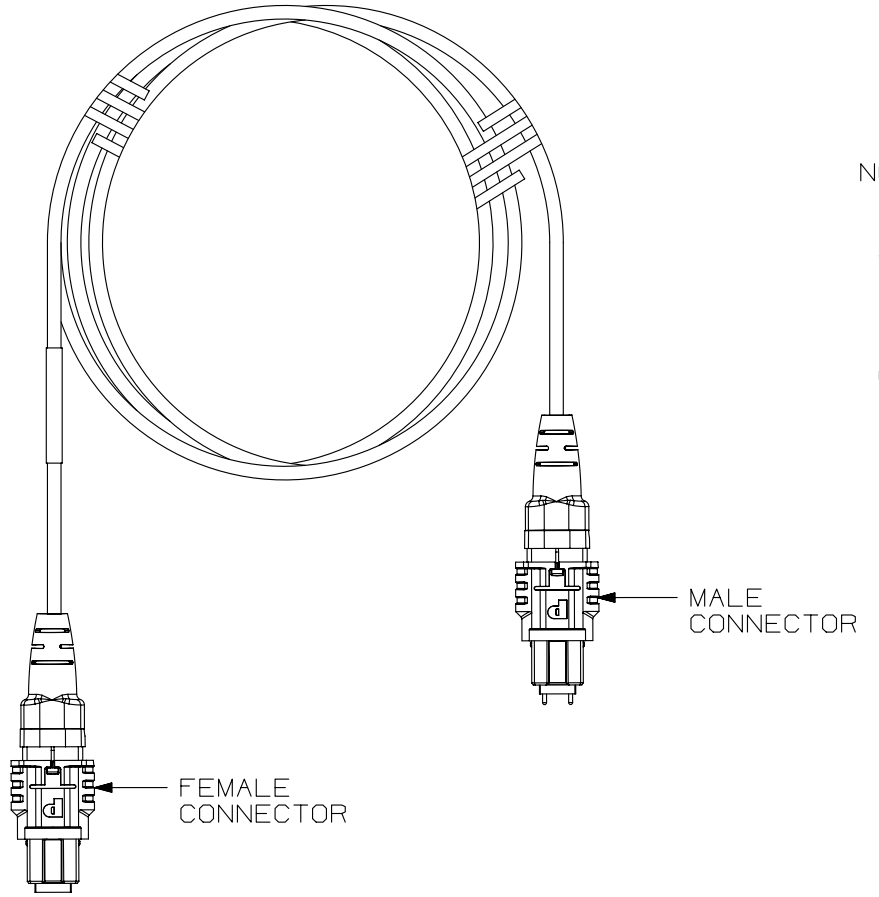

FEMALE TO MALE
PAN MPO PATCHCORD SHOWN

NOTES:
1. SEE SHEETS 2,3,& 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-C.3.
5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	05-21-13	MC	JDK	SFD0	RELEASED TO PRODUCTION	10F093BF-DC

TITLE
FIBER OPTIC PATCH CORD
PAN MPO TO PAN MPO
CUSTOMER DRAWING

ITEM REVISION NAME: 10F093BF/00

DATASET FILE NAME: 10F093BF_DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ± .010 [0.3]
.XX ± .03 [0.8] ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 10F093BF-DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 4	SIZE
MC	05-14-13	JDK	NONE		A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FEMALE TO FEMALE - PAN MPO TO PAN MPO FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				MTP CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	PERFORMANCE	POLARITY	BOOT COLOR
F5TRP7N7NANM***	PLENUM (OFNP)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK
FXTRP7N7NANM***		OM3		AQUA	STANDARD		
FXTRP7N7NXNM***					OPTIMIZED		
FXTRP7N7NBNM***					STANDARD	METHOD B	
FXTRP7N7NYNM***					OPTIMIZED		
FZTRP7N7NANM***		OM4			STANDARD	METHOD A	
FZTRP7N7NXNM***					OPTIMIZED		
FZTRP7N7NBNM***					STANDARD	METHOD B	
FZTRP7N7NYNM***					OPTIMIZED		
F5TRL7N7NANM***	LOW SMOKE ZERO HALOGEN (LSZH)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK
FXTRL7N7NANM***		OM3		AQUA	STANDARD		
FXTRL7N7NXNM***					OPTIMIZED		
FXTRL7N7NBNM***					STANDARD	METHOD B	
FXTRL7N7NYNM***					OPTIMIZED		
FZTRL7N7NANM***		OM4			STANDARD	METHOD A	
FZTRL7N7NXNM***					OPTIMIZED		
FZTRL7N7NBNM***					STANDARD	METHOD B	
FZTRL7N7NYNM***					OPTIMIZED		

*** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	05-21-13	MC	JDK	SFDO	RELEASED TO PRODUCTION	10F093BF-DC

TITLE

FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO

CUSTOMER DRAWING

ITEM REVISION NAME: 10F093BF/00

DATASET FILE NAME: 10F093BF_DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ± .010 [0.3]

.XX ± .03 [0.8] ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES SHEET 1

DRAWING NUMBER: 10F093BF-DC

DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 4	SIZE
MC	05-15-13	JDK	NONE		A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MALE TO MALE - PAN MPO TO PAN MPO FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				MTP CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	PERFORMANCE	POLARITY	BOOT COLOR
F5TRP8N8NANM***	PLENUM (OFNP)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK
FXTRP8N8NANM***		OM3		AQUA	STANDARD		
FXTRP8N8NXNM***					OPTIMIZED		
FXTRP8N8NBNM***					STANDARD	METHOD B	
FXTRP8N8NYNM***					OPTIMIZED		
FZTRP8N8NANM***		OM4			STANDARD	METHOD A	
FZTRP8N8NXNM***					OPTIMIZED		
FZTRP8N8NBNM***					STANDARD	METHOD B	
FZTRP8N8NYNM***					OPTIMIZED		
F5TRL8N8NANM***	LOW SMOKE ZERO HALOGEN (LSZH)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK
FXTRL8N8NANM***		OM3		AQUA	STANDARD		
FXTRL8N8NXNM***					OPTIMIZED		
FXTRL8N8NBNM***					STANDARD	METHOD B	
FXTRL8N8NYNM***					OPTIMIZED		
FZTRL8N8NANM***		OM3			STANDARD	METHOD A	
FZTRL8N8NXNM***					OPTIMIZED		
FZTRL8N8NBNM***					STANDARD	METHOD B	
FZTRL8N8NYNM***					OPTIMIZED		

*** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	05-21-13	MC	JDK	SFD0	RELEASED TO PRODUCTION	10F093BF-DC

TITLE

FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO

CUSTOMER DRAWING

ITEM REVISION NAME: 10F093BF/00

DATASET FILE NAME: 10F093BF_DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ± .010 [.3]

.XX ± .03 [.08] ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES SHEET 1

DRAWING NUMBER: 10F093BF-DC

DRAWN BY	DATE	CHK	SCALE	SHT 3 OF 4	SIZE
MC	05-15-13	JDK	NONE		A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FEMALE TO MALE - PAN MPO TO PAN MPO FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				MTP CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	PERFORMANCE	POLARITY	BOOT COLOR
F5TRP7N8NANM***	PLENUM (OFNP)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK
FXTRP7N8NANM***		OM3		AQUA	STANDARD		
FXTRP7N8NXNM***					OPTIMIZED		
FXTRP7N8NBNM***					STANDARD	METHOD B	
FXTRP7N8NYNM***					OPTIMIZED		
FZTRP7N8NANM***		OM4			STANDARD	METHOD A	
FZTRP7N8NXNM***					OPTIMIZED		
FZTRP7N8NBNM***					STANDARD	METHOD B	
FZTRP7N8NYNM***					OPTIMIZED		
F5TRL7N8NANM***	LOW SMOKE ZERO HALOGEN (LSZH)	OM2		ORANGE	STANDARD	METHOD A	
FXTRL7N8NANM***		OM3		AQUA	STANDARD		
FXTRL7N8NXNM***					OPTIMIZED		
FXTRL7N8NBNM***					STANDARD	METHOD B	
FXTRL7N8NYNM***					OPTIMIZED		
FZTRL7N8NANM***		OM3			STANDARD	METHOD A	
FZTRL7N8NXNM***					OPTIMIZED		
FZTRL7N8NBNM***					STANDARD	METHOD B	
FZTRL7N8NYNM***					OPTIMIZED		

*** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	05-21-13	MC	JDK	SFDO	RELEASED TO PRODUCTION	10F093BF-DC

TITLE

FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO

CUSTOMER DRAWING

ITEM REVISION NAME: 10F093BF/00

DATASET FILE NAME: 10F093BF_DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.54] .XXX ± .005 [.127]

.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES SHEET 1

DRAWING NUMBER: 10F093BF-DC

DRAWN BY	DATE	CHK	SCALE	SHT 4 OF 4	SIZE
MC	05-15-13	JDK	NONE		A