


OBSOLETE

- ⚠ CONTACTS: COPPER ALLOY.
SHELL: COPPER ALLOY
HOUSING: UL 94V-0 RATED THERMOPLASTIC, COLOR: SEE TABLE.
- ⚠ CONTACTS: 0.076μm MINIMUM GOLD OVER
0.76μm MINIMUM PALLADIUM NICKEL ON MATING AREA.
3.80μm MINIMUM TIN-LEAD ON SOLDER TAILS
ALL OVER 1.27μm MINIMUM NICKEL.
SHELL: 5.10μm MINIMUM BRIGHT TIN.
- ⚠ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⚠ RECOMMENDED PC BOARD THICKNESS 1.57.
- ⚠ CONTACTS: 0.076μm MINIMUM GOLD OVER
0.76μm MINIMUM PALLADIUM NICKEL ON MATING AREA.
3.80μm MINIMUM TIN-LEAD ON SOLDER TAILS
ALL OVER 1.27μm MINIMUM NICKEL.
SHELL: 1.27μm MINIMUM NICKEL ALL OVER, MATTE TIN DIPPED ON TAILS.
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

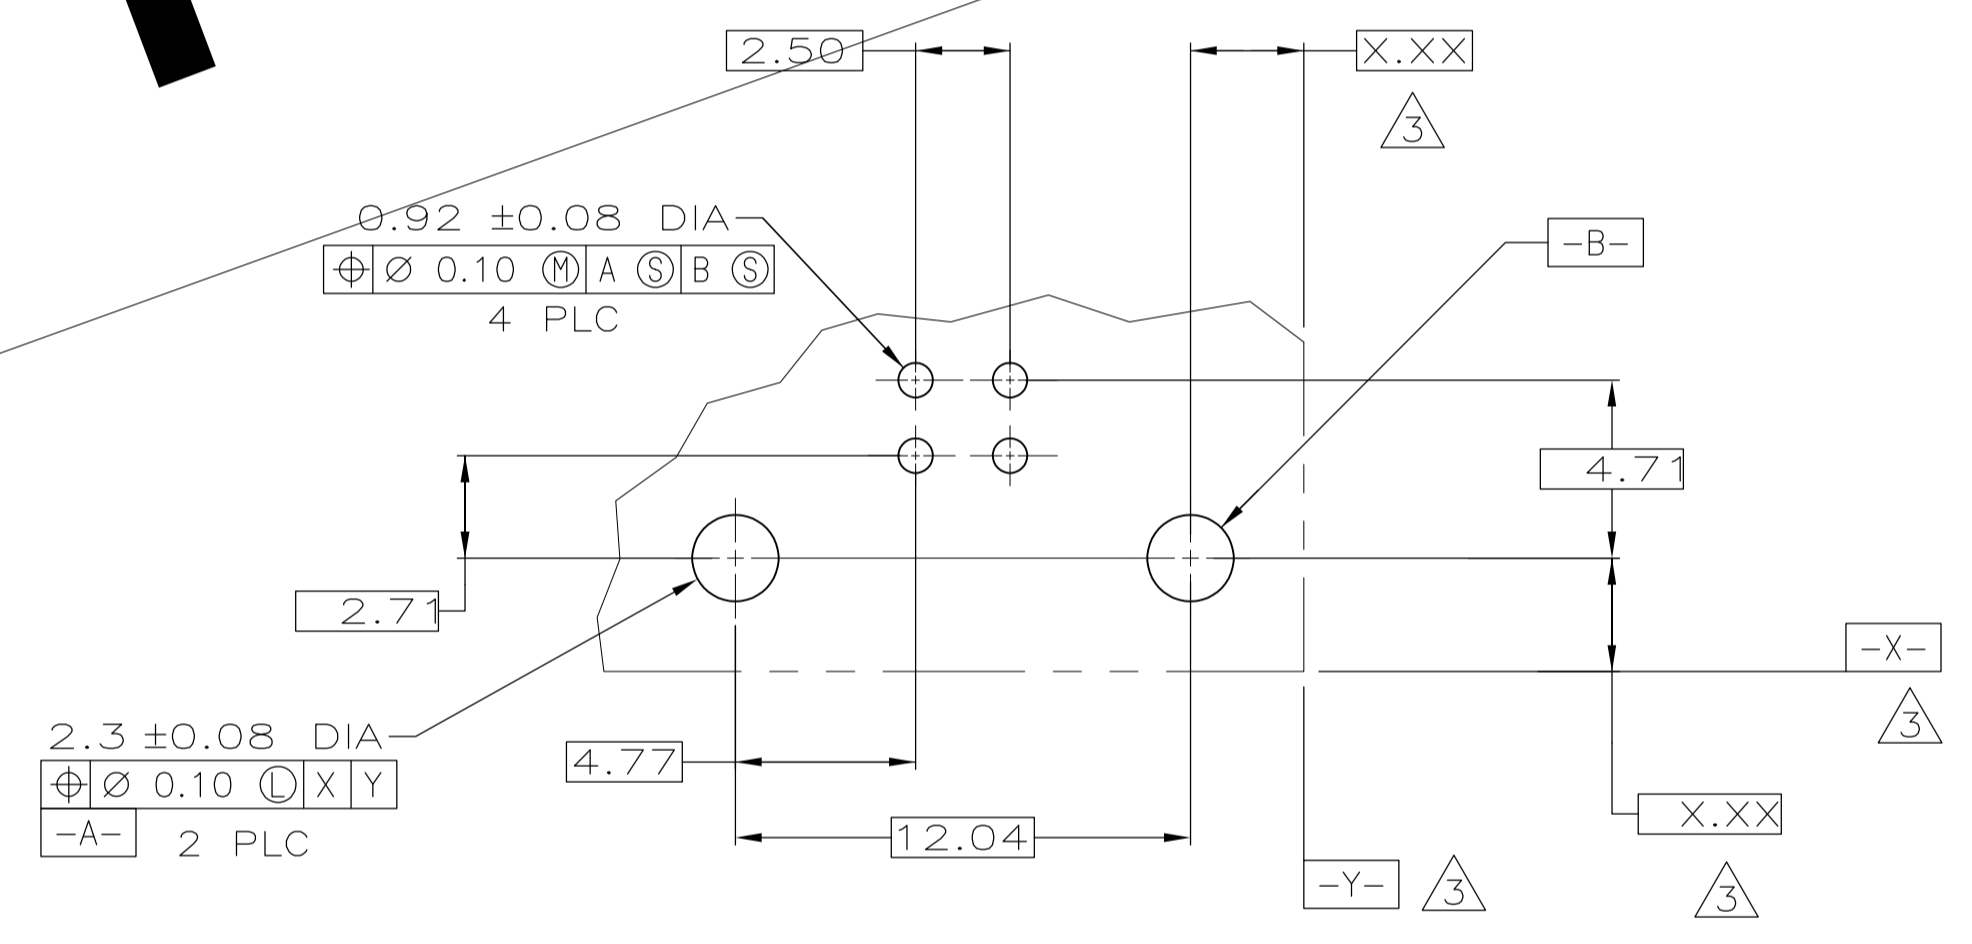

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

⚠ OBSOLETE	YES	⚠	BLACK	787924-4
⚠ OBSOLETE	NO	⚠	BLACK	787924-3
⚠ OBSOLETE	YES	⚠	NATURAL	787924-2
⚠ OBSOLETE	YES	⚠	BLACK	787924-1
HIGH TEMPERATURE COMPATIBLE		FINISH	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 25 OCT 96		D. BROCKWAY																			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CIR 14 NOV 96																			
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>0.10</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	0.10	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	APVD 14 NOV 96		NAME	
0 PLC	±	-																					
1 PLC	±	-																					
2 PLC	±	0.10																					
3 PLC	±	-																					
4 PLC	±	-																					
ANGLES	±	-																					
MATERIAL		FINISH		SEE TABLE																			
WEIGHT		SIZE		CAGE CODE																			
CUSTOMER DRAWING		A1		00779C=787924																			
SCALE		SHEET		REV																			
5:1		1 of 1		H3																			