

<b>—</b>	G	П	m	D	<b>O</b>



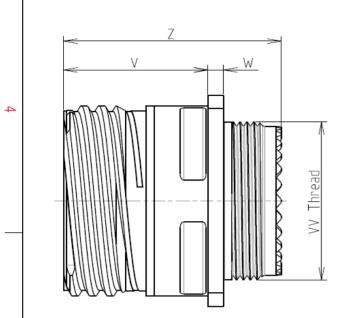

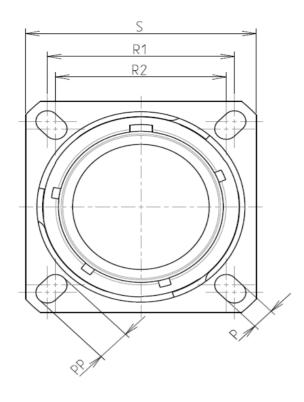

Keying Shown as example

## CHARACTERISTICS

ယ

Γ

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
$\sim$	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	65°C to +200°C		
	-Salt Spray	: 500 hours		

: 36.7 g ± 10%

8D 0

G

13

S

04

Ρ


F

D

L

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	23.01	
R2	20.62	
S	28.6±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M18x1-6g	

Е

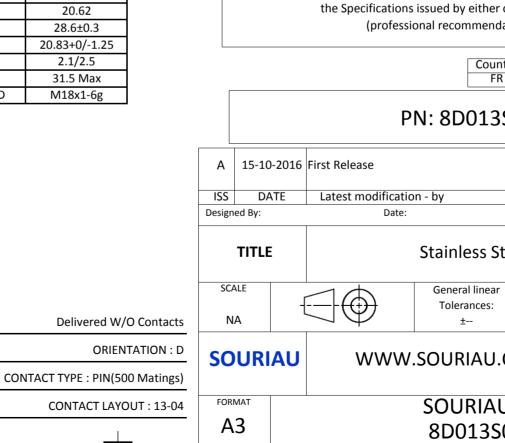

D

0		σ		A		_
						4
LAY	YOUT SHOWN AS EXA	AMPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						2
P rst Release	N: 8D013S0	4PDL				
Latest modificatio	n - by				MOD N°	
Date:	Stainless Stee	el Recepta	customer d Icle 8D serie			
$] \bigcirc$	General linear NPRDS / PROJECT   Tolerances: 859				1	
WWW.SOURIAU.COM   This document is the property of SOURIAU     it must not be reproduced or communicated without permission						
	SOURIAU I 8D013S04		1		SHEET	
С	001004	B		A	-, -	J

-	Ŧ	۵	וד	m		0	
		Contact Layout					Panel Cutout
4	,	$x_{1} \begin{pmatrix} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & $			ĥ	SQUARE FLANGE RECEPTACLE (TYPE 0 REAR MOUNTING	0
	Controposition A B C D Shell Arrangement N size Arrangement N 13 -4	n ID     (mm)     (mm)       +.000 (0.00)     +.150 (3.81)       +.146 (3.71)     +.035 (0.89)       +.000 (0.00)    083 (2.11)      146 (3.71)     +.035 (0.89)					š
ω						Di Ø ØA R Ø	A A 1
	F					SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products whi ed by either of
N						PN: 8	Country FR 8D013S(
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					TITLE SCALE NA		eneral linear Tolerances:
					SOURIA	U WWW.SO	
		Ι	I		FORMAT A3	8	DURIAU D013S04
	Н	G	F	E	D	C	

