
# S40F1C-P03MJG0-350S series\_f, type\_s4



General Information		
Part number	S40F1C-P03MJG0-350S	
Termination	solder	
Size	0	( ( III. Ho
Locking principle	push	C-6-1111-6-15
Coding	1_halfshell	
Cable Diameter	cable_mini_35	
Cable outlet	bend_relief	

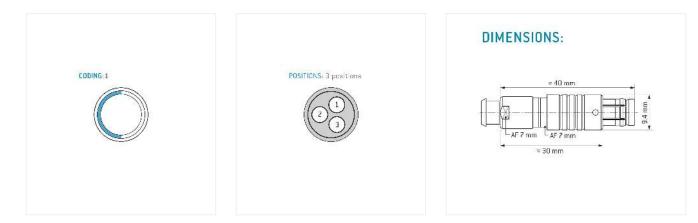

## Contact insert description

3
pins
09mm
peek
22_awg
solder
085mm

reverse\_gender\_on\_request

### Technical information

Max. creepage and air clearance distance	06_mm	09_mm
Nominal current single contact	075_a	iec_60512_5_2
Nominal current insert	7,5 A	vde_0298_4
Test voltage	12_kv_ac	sae_13441

safety\_text

### Mechanical and environmental data

Degree of protection*	ip68	
Operating temperature	40_120_c	
Mating cycles	5000	
mated		

#### Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold



safety\_text\_2 ul\_text illustrative\_text