
### S10F1C-P09MCC0-3500


# series\_f, type\_s1



#### **General information**

| Part number       | S10F1C-P09MCC0-3500 |              |
|-------------------|---------------------|--------------|
| Termination       | solder              |              |
| Size              | 0                   |              |
| Locking principle | push                | 5 1 MIL (13) |
| Coding            | 1_halfshell         |              |
| Cable Diameter    | cable_mini_35       |              |
| Cable outlet      | standard            |              |

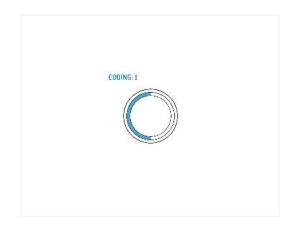

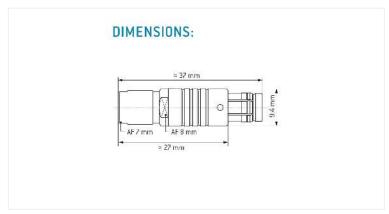

## Contact insert description

| Number of contacts   | 9      |
|----------------------|--------|
| Contact type         | pins   |
| Contact diameter     | 05mm   |
| Insulator material   | peek   |
| Wire cross section   | 28_awg |
| Termination          | solder |
| Termination diameter | 04mm   |

reverse\_gender\_on\_request

### **Technical information**

| Max. creepage and air clearance distance | 06 <sub>mm</sub> | 05 <sub>mm</sub> |
|--|------------------|------------------|
| Nominal current single contact           | 04_a             | iec_60512_5_2    |
| Nominal current insert                   | 2,6 A            | vde_0298_4       |
| Test voltage                             | 06_kv_ac         | sae_13441        |
| safety_text                              |                  |                  |

### Mechanical and environmental data

| Degree of protection* | ip50     |
|-----------------------|----------|
| Operating temperature | 40_120_c |
| Mating cycles         | 5000     |

mated\_unmated

### Material and surface treatments

| Housing | m_chrome      |
|---------|---------------|
| Contact | cu_alloy_gold |

safety\_text\_2 ul\_text illustrative\_text