


| Date    | SYM | REVISION RECORD        | AUTH | DR.  | CK. |
|---------|-----|------------------------|------|------|-----|
| 6/07/19 | C   | UPDATED ALL DIMENSIONS | T.B. | B.S. |     |
|         |     |                        |      |      |     |
|         |     |                        |      |      |     |
|         |     |                        |      |      |     |

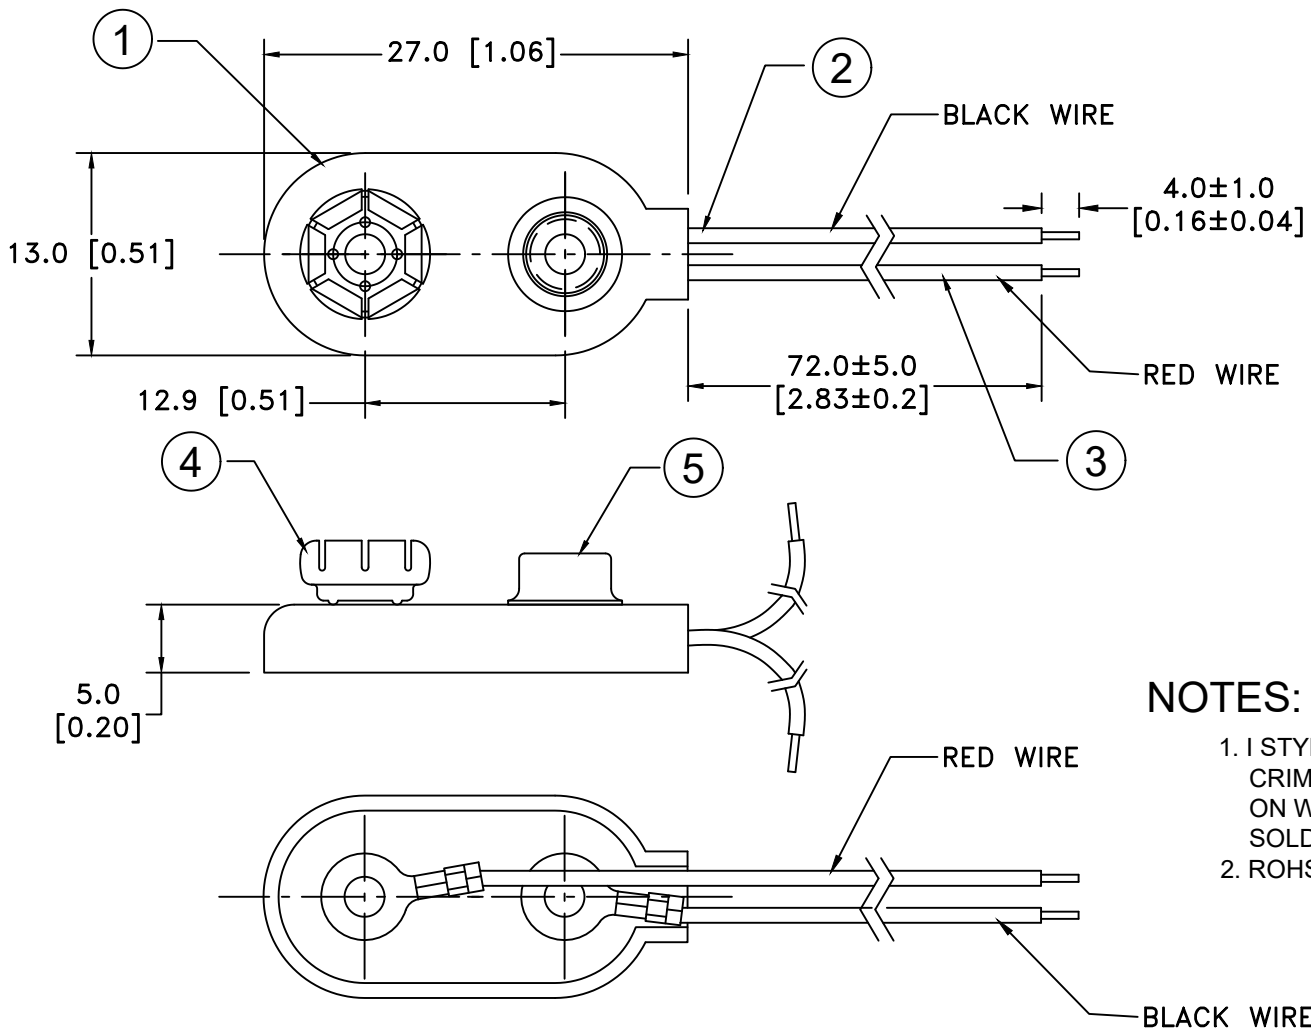

**NOTES:**

- 1. I STYLE 2 PCS. MOLDED CASE CONSTRUCTION WITH CRIMP CONNECTIONS. CRIMP ON WIRE INSULATION AND ON WIRE PROVIDES STRAIN RELIEF THAT STANDARD SOLDERED SNAPS DO NOT HAVE.
- 2. ROHS COMPLIANT

| N0. | PART NAME     | MATERIAL                                     | QTY. | Tolerance<br>(Except as noted) | MPD Memory Protection Devices, Inc<br>200 Broad Hollow Road, Farmingdale, New York 11735 |                  |  |
|-----|---------------|--|------|--------------------------------|--|------------------|--|
| 1   | MOLDED CASE   | 2 PCS., POLYETHYLENE, WHITE WITH BLUE INSERT | 1    | decimal                        | Scale  | Drawn By B.S.    |  |
| 2   | BLACK WIRE(-) | 24 AWG, UL-1007, CSA TR-64, 300V, 80°C       | 1    | ±.5 (.020)                     |  | Approved By T.B. |  |
| 3   | RED WIRE (+)  | 24 AWG, UL-1007, CSA TR-64, 300V, 80°C       | 1    | Fractional                     | Title 9 VOLT BATTERY SNAP-I STYLE-3" WIRE LEADS, MOLDED CASE                             |                  |  |
| 4   | FEMALE SNAP   | BRASS NICKLE PLATED                          | 1    | ± .8 (.030)                    | Date   | Drawing Number   |  |
| 5   | MALE SNAP     | BRASS NICKLE PLATED                          | 1    | Angular                        | 6/07/19  | BS3I-MC          |  |
|     |               |  |      | ± 3°                           |  |                  |  |