

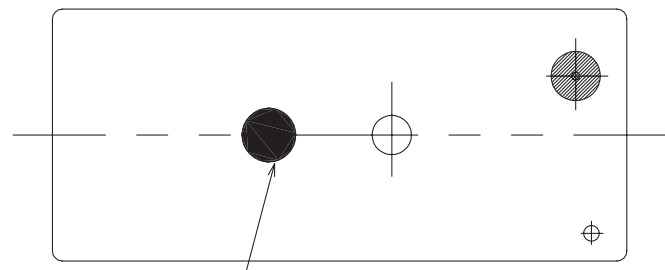


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	G CHANGE BASE MATERIAL TO PBT	ECN-21-111227	15-JUL-21	XRL K.T

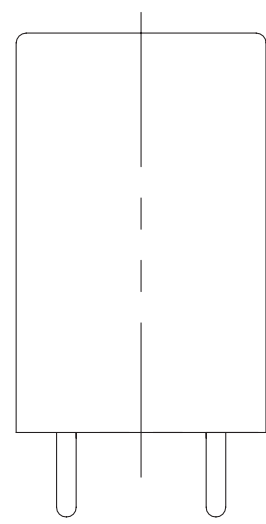



DOT MARK: PURPLE

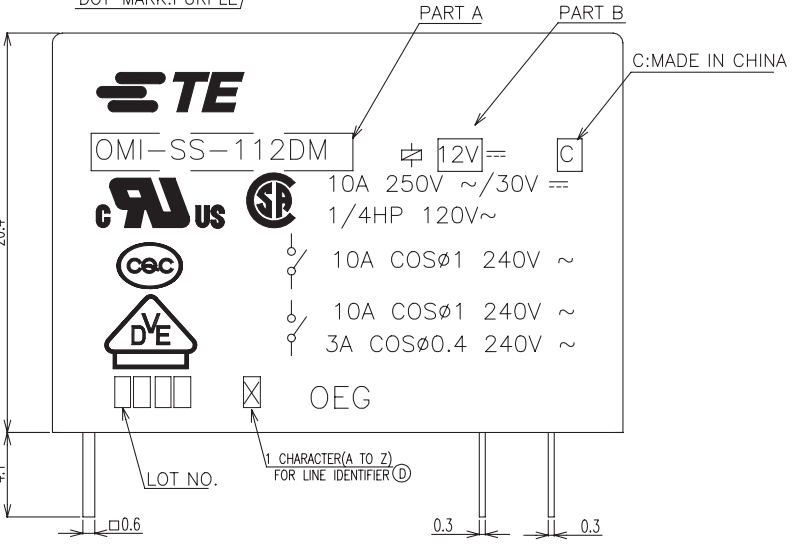

CONNECTION DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (2/1) (BOTTOM VIEW)

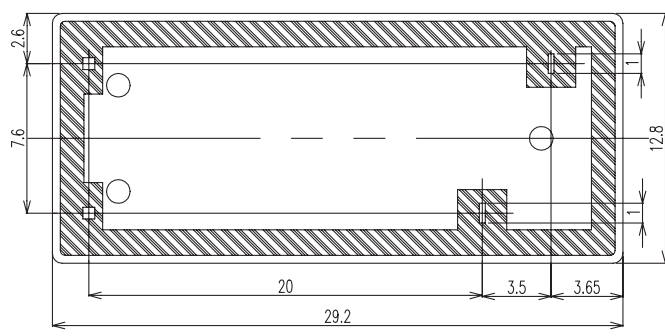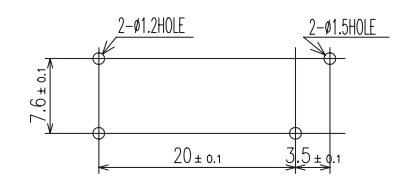

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI	TE Connectivity OMI-1M,394 CUSTOMER DRAWING		
DIMENSIONS: mm		CHK -			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC ±-	PRODUCT SPEC A.NAGAI	SIZE A3	RESTRICTED TO -
MATERIAL		1 PLC ±-	APPLICATION SPEC -	CAGE CODE 00779	
		2 PLC ±-	WEIGHT -	DRAWING NO C=3-1440000-9	SCALE 1:1
		3 PLC ±-	CUSTOMER DRAWING	SHEET 1 of 2	REV G
		4 PLC ±-			
		ANGLES ±-			
		FINISH ±-			

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HB	-	P	LTR	DESCRIPTION	DATE	DWN	APVD

NOTES:
 1.-SH- : WASHABLE TYPE
 2.LOT NO. SYSTEM AS FOLLOWING:



3.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
MAX .1mm	±0.1
1mm~MAX.3mm	±0.2
3mm MIN.	±0.3

4.FOR THE TIN-PLATING OF THE PINS:
 +0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
 +0.5mm FOR LENGTH.

TE PART NO	DESCRIPTION	PART B	PART A
2071438-1	OMI-SH-112LM	12V	OMI-SH-112LM
4-1440000-4	OMI-SH-124LM	24V	OMI-SH-124LM
4-1440000-1	OMI-SH-112LM	12V	OMI-SH-112LM
3-1440000-9	OMI-SH-112DM	12V	OMI-SH-112DM

RELAY TYPE

RELAY TYPE	UV RESIN	UV SEAL	ITEM	
	EPOXY RESIN	SEAL	16	
UL94 V-0	PBT (F)	CASE	14	
CLASS E	UEW	MAGNETIC WIRE	13	
UL94 V-0	PBT (G)	BASE	12	
UL94 V-0	PBT	BOBBIN	11	
	SOLDER DIP	CP WIRE	COIL TERMINAL 10	
UL94 V-0	PPS	CARD	9	
	Ag ALLOY	MOVABLE CONTACT	8	
	Ag ALLOY	STATIONARY CONTACT	7	
	Cu ALLOY	HINGE SPRING	6	
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL 5	
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING 4	
	STEEL	CORE	3	
	STEEL	ARMATURE	2	
	STEEL	YOKE	1	
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.SASAKI	TE Connectivity OMI-1M,394 CUSTOMER DRAWING		
DIMENSIONS: mm		CHK -			
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		PRODUCT SPEC A.NAGAI	DRAWING NO
MATERIAL		APVD -	APPLICATION SPEC -	SIZE A3	RESTRICTED TO
		WEIGHT -		CAGE CODE 00779	DRAWING NO C=3-1440000-9
CUSTOMER DRAWING			SCALE 1:1	SHEET 2 OF 2	REV G