



## Silicon Dual Schottky Power Rectifier


### 35 Amp, 150 Volt

Qualified per MIL-PRF-19500/737

Qualified Levels:  
JAN, JANTX, and  
JANTXV

#### DESCRIPTION

This Dual Schottky rectifier device is military qualified up to a JANTXV level for high-reliability applications. They are hermetically sealed in a common cathode configuration offering very fast switching characteristics compared to fast or ultrafast rectifiers.



**TO-254AA Package**

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

#### FEATURES

- JEDEC registered equivalent of 1N7039
- Hermetically isolated TO-254AA package
- Internal metallurgical bonds
- Temperature independent switching behavior
- JAN, JANTX, and JANTXV qualifications are available per MIL-PRF-19500/737
- RoHS compliant versions available (commercial grade only)

Also available in:

**TO-257AA package**  
(leaded)



[1N7047CCT3](#)

**U1 (SMD-1) package**  
(surface mount)



[1N7039CCU1](#)

#### APPLICATIONS / BENEFITS

- Schottky barrier rectifier diodes (dual) for military, space and other high reliability applications
- Switching power supplies or other applications requiring extremely fast switching and essentially no switching losses.
- Low forward voltage drop
- High forward surge capability
- Inherently radiation hard >100 krads as described in [MicroNote 050](#)

#### MAXIMUM RATINGS @ $T_A = +25^\circ\text{C}$ unless otherwise noted.

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	$T_J$ and $T_{STG}$	-65 to +150	$^\circ\text{C}$
Thermal Resistance Junction-to-Case (2.3 $^\circ\text{C}/\text{W}$ maximum)	$R_{\text{EJC}}$	1.9	$^\circ\text{C}/\text{W}$
Working Peak Reverse Voltage	$V_{RWM}$	150	V
Junction Capacitance	$C_J$	350	pF
Average DC Output Current @ $T_C = +100^\circ\text{C}$	$I_O$	35	A
Non-Repetitive Sinusoidal Surge Current @ $t_p = 8.3 \text{ ms}$ , $T_C = +25^\circ\text{C}$	$I_{FSM}$	180	A

**MSC – Lawrence**

6 Lake Street,  
Lawrence, MA 01841  
Tel: 1-800-446-1158 or  
(978) 620-2600  
Fax: (978) 689-0803

**MSC – Ireland**

Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298


**Website:**

[www.microsemi.com](http://www.microsemi.com)

### MECHANICAL and PACKAGING

- CASE: Nickel plated copper base with steel frame and ceramic feed through
- TERMINALS: Nickel plated Cu cored Alloy 52
- Pins are Hot Solder Dip (Sn63/Pb37)
- MARKING: Part number, date code, and polarity symbol
- POLARITY: See [Schematic](#) on last page
- WEIGHT: Approximately 6.5 grams
- See [Package Dimensions](#) on last page.

### PART NOMENCLATURE

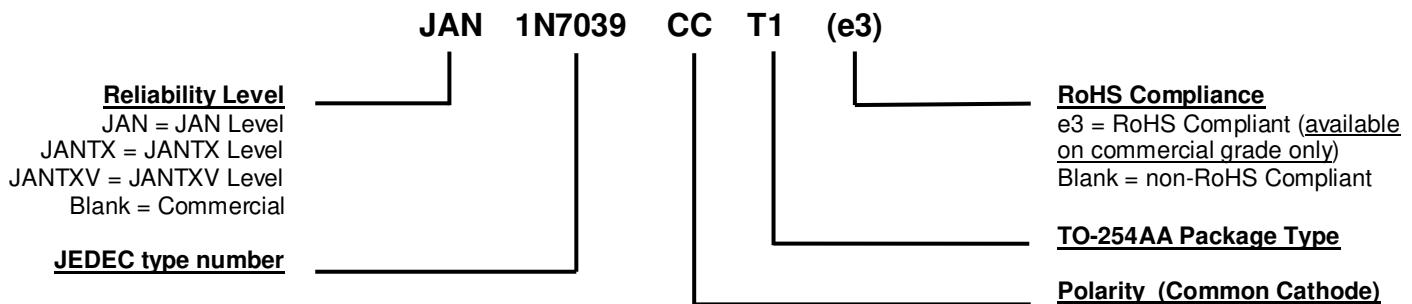


### SYMBOLS & DEFINITIONS

Symbol	Definition
$C_J$	Junction Capacitance: The junction capacitance in pF at a specified frequency (typically 1MHz) and specified voltage.
$I_F$	Forward current: The current flowing from the p-type region to the n-type region.
$I_R$	Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage $V_R$ .
$T_J$	Junction temperature: The temperature of a semiconductor junction.
$V_F$	Forward Voltage: A positive dc anode-cathode voltage the device will exhibit at a specified forward current.
$V_R$	Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region.


**ELECTRICAL CHARACTERISTICS @  $T_A = +25^\circ\text{C}$  unless otherwise noted**

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
<b>OFF CHARACTERISTICS</b>				
Forward Voltage*				
$I_F = 15 \text{ A}$		1.13		
$I_F = 35 \text{ A}$		1.60		V
$I_F = 15 \text{ A}, T_C = -55^\circ\text{C}$		1.35		
$I_F = 35 \text{ A}, T_C = +125^\circ\text{C}$		1.20		
Reverse Current				
$V_R = 150 \text{ V}$		0.5		
$V_R = 150 \text{ V}, T_C = +125^\circ\text{C}$		15		mA

\* Pulse test: Pulse width 300  $\mu\text{sec}$ , duty cycle 2%.

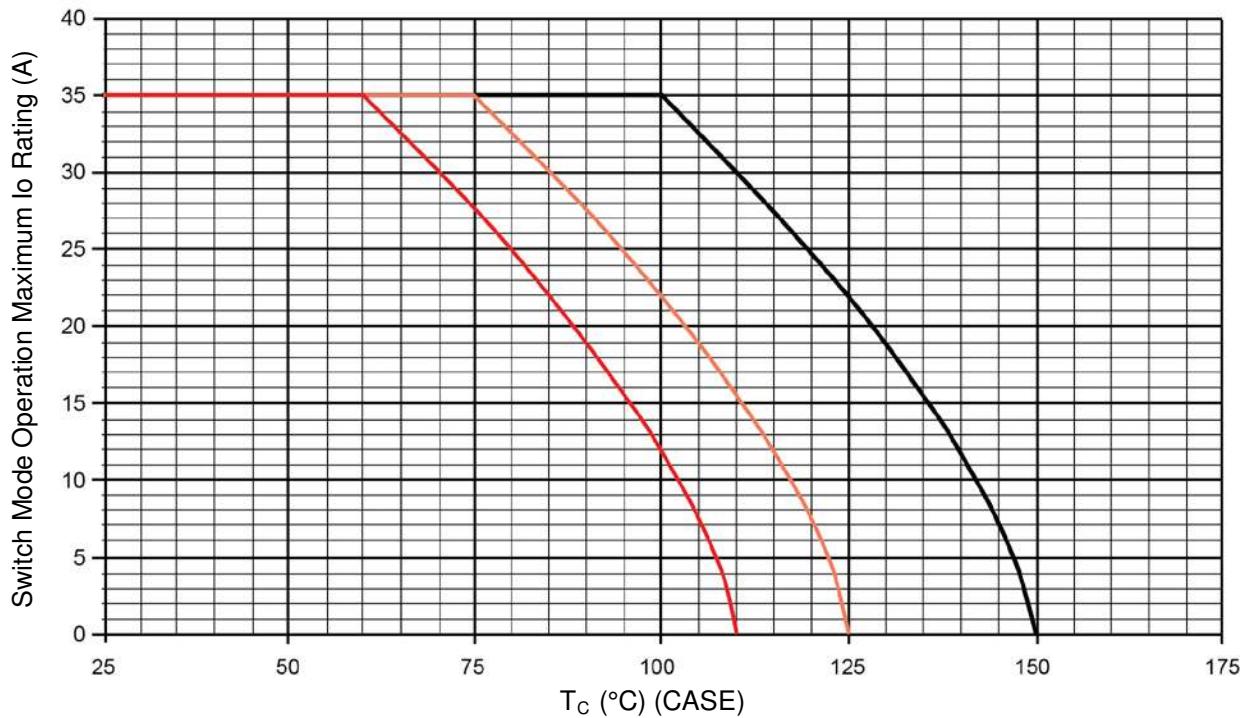
**GRAPHS**


**FIGURE 1**  
Temperature-Current Derating (entire package)

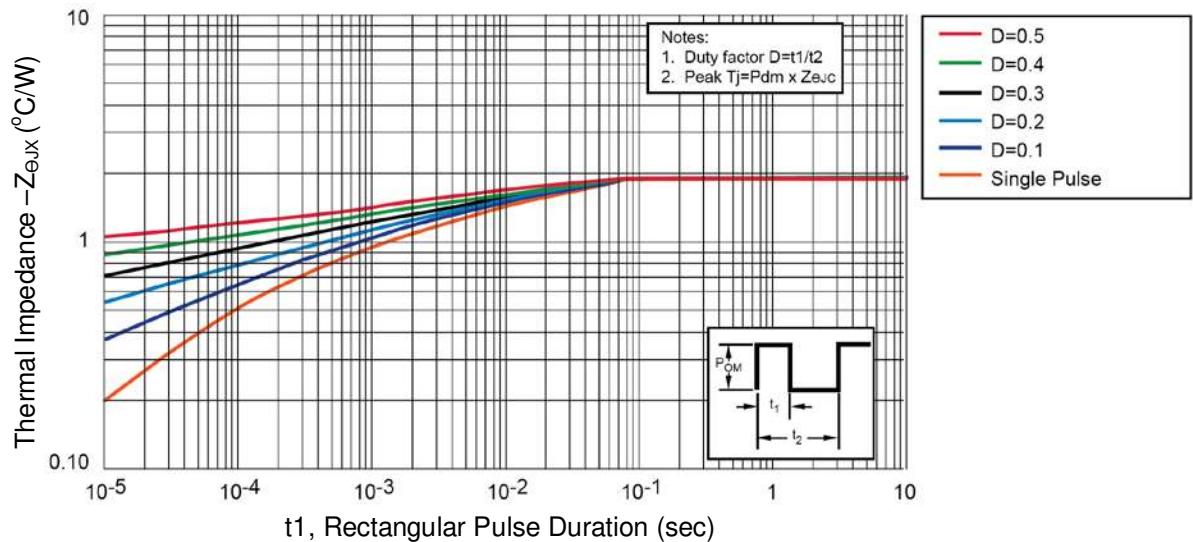

**FIGURE 2**  
Thermal Impedance (for each leg)


### PACKAGE DIMENSIONS

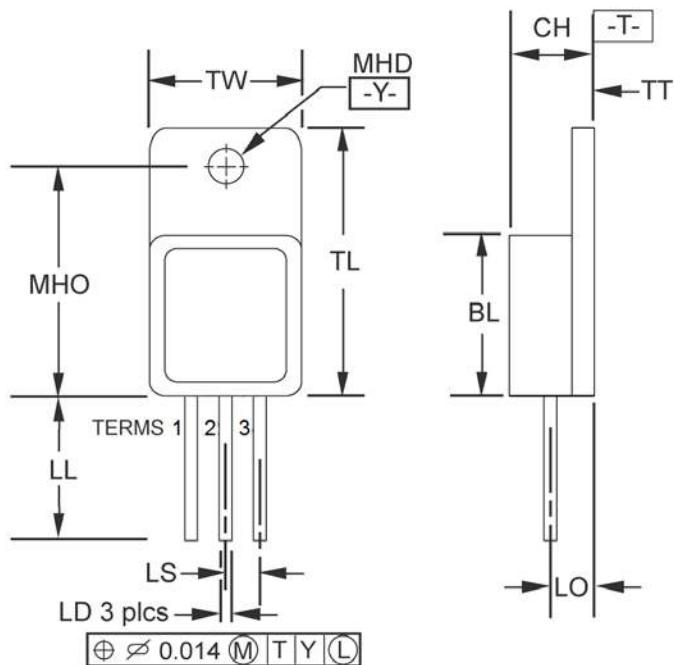
**NOTES:**

1. Dimensions are in inches.
2. Millimeters are given for information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi x$  symbology.

Ltr	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
<b>BL</b>	0.535	0.545	13.59	13.84
<b>CH</b>	0.249	0.260	6.32	6.60
<b>LD</b>	0.035	0.045	0.89	1.14
<b>LL</b>	0.510	0.570	12.95	14.48
<b>LO</b>	0.150 BSC		3.81 BSC	
<b>LS</b>	0.150 BSC		3.81 BSC	
<b>MHD</b>	0.139	0.149	3.53	3.78
<b>MHO</b>	0.665	0.685	16.89	17.40
<b>TL</b>	0.790	0.800	20.07	20.32
<b>TT</b>	0.040	0.050	1.02	1.27
<b>TW</b>	0.535	0.545	13.59	13.84

### SCHEMATIC



TERM 1 = ANODE  
 TERM 2 = CATHODE  
 TERM 3 = ANODE