
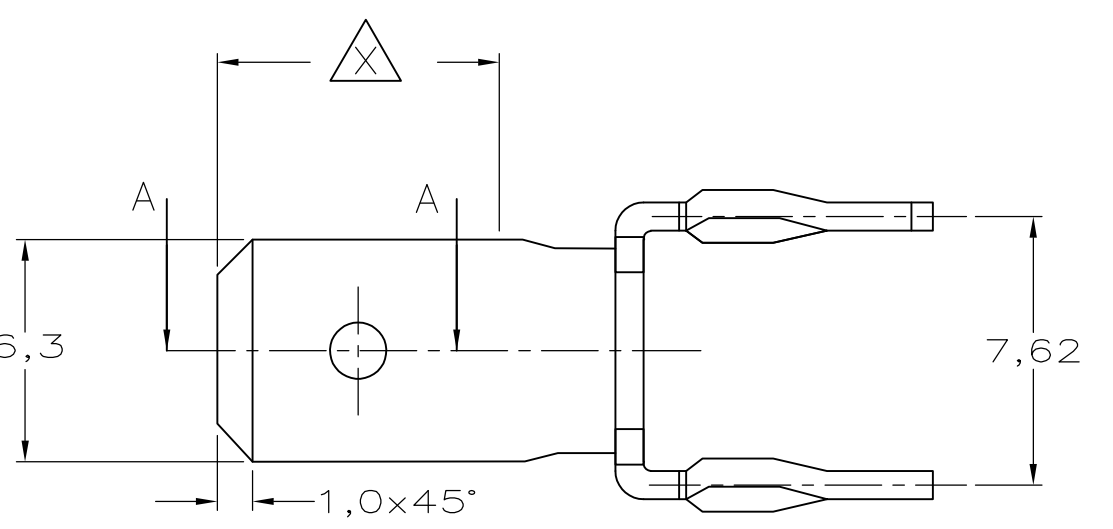



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—	D	ECR-05-006211	13JUL05	CJF JB
		D1	REVISED PER ECO-10-000030	04JAN10	KK AEG

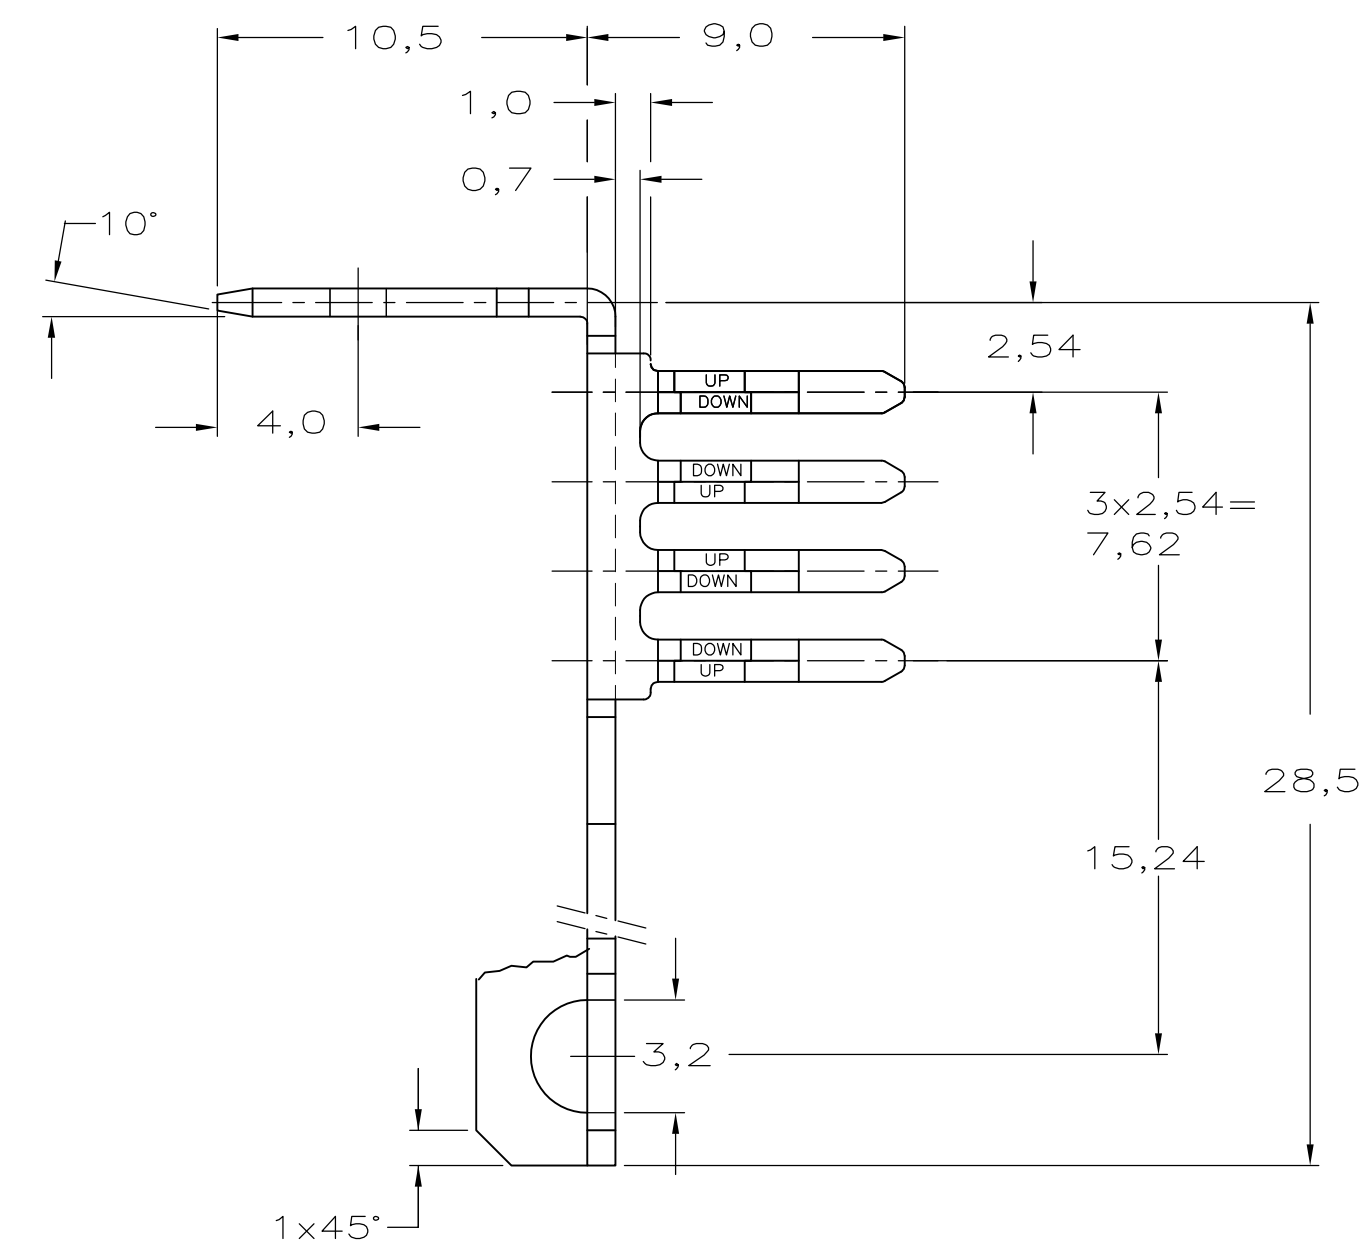

NOTES:

- ① PHOSPHORBRONZE.
- ② PLATING : AREA Δ Sn PLATE TO ASTM B 545. NI UNDERCOAT TO ASTM B 571 ALL OVER
- ③ PLATING : Sn PLATE TO ASTM B 545 AND NI UNDERCOAT TO ASTM B 571 ALL OVER
- ④ QUANTITY PER PACKAGE 2000 PCS.

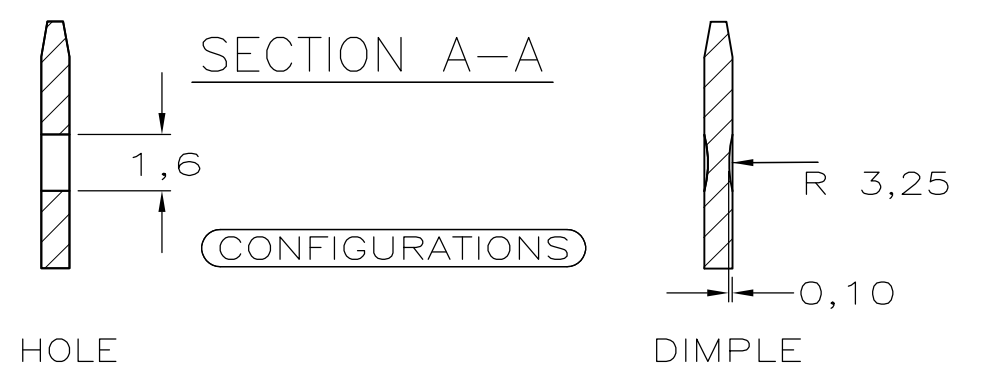

	DIMPLE	④②	①	1-167890-2
	HOLE	②	①	167890-7
	HOLE	③	①	167890-6
	-			-
	DIMPLE	③	①	167890-3
OBSOLETE	DIMPLE	②	①	167890-2
	CONFIGURATION	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.Meeuwsen 15JAN93	Tyco Electronics Corporation s-HertogenBosch, Nederland,
CHK R.v.Lokven 22JAN93	
APVD L.v.Soest	NAME
PRODUCT SPEC 108-19059	8 POS. POWER LINKING TERMINAL WITH ACTION PIN
APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
WEIGHT -	A3 00779 C-167890 -
CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV D1